


CBAM

- Active modular chilled beam with 4-way air distribution pattern
- Optimized nozzle design provides high capacity and low noise levels
- Modular design matching commercial architectural styling
- Designed to fit in standard 24 inch ceiling systems
- Optimized diffuser geometry maximizes occupant comfort



CBAM

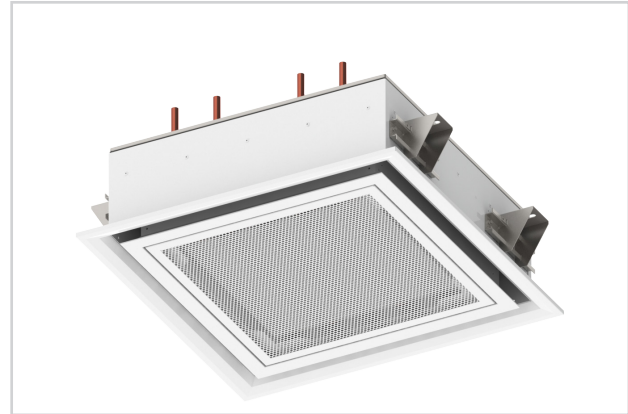

 See website for Specifications

MODEL:

CBAM: 24" x 24" / 48" x 24" module sizes

FINISHES:

Standard Finish - #26 White
Optional Finish - #84 Black

OVERVIEW

Titus active chilled beams features the aerodynamic properties of Titus ceiling diffusers and benefit from the use of using hydronic coils and induced air to reduce energy consumption associated with removal of sensible thermal loads. The primary air is supplied to the chilled beam subsequent to it being discharged through a series of nozzles located along the perimeter of the beam. The nozzles inject the primary air into the mixing chamber at velocities capable of inducing room air through the water coil and where it mixes with the primary supply air. This mixture of air is then discharged into the space through the ceiling slot diffusers. This provides high cooling outputs with low amounts of primary air. The reduced volume of air results in the reduction of the air handler capacity and size, smaller duct sizes, and the overall energy consumption.

The supplied air from the air handling unit is tempered and dehumidified to handle the latent load. The remaining loads in the space are addressed with the heat exchanger which is incorporated into the chilled beam. Applications with low latent cooling loads could use 100 percent outdoor air allowing for use of a dedicated outdoor air system with energy recovery further reducing total system energy consumption.

The CBAM's are offered for both, cooling and heating, and in 24" x 24" and 48" x 24" module sizes. They can be easily integrated into different grids styles within a suspended ceiling or even in drywall ceilings. The low overall height of the CBAM product line is ideal for reducing the space required for false ceiling in any application.

ADVANTAGES

- Removal of high thermal loads is possible in this air/water system
- The size of the air duct system is reduced to a minimum, due to the low supply of primary air
- Substantial reduction in the operating costs, due to low primary air volume
- Improvement of the thermal comfort inside the room
- Suitable for several standard ceiling grids
- Contributing sound levels below NC-30

CBAM STANDARD FEATURES

- 4-way air distribution pattern
- 24-inch and 48 inch lengths
- 24-inch width
- Perforated or linear bar induced air grille
- Top or side coil connections
- Top or side air inlet locations
- 2-pipe and 4-pipe coil configurations
- Configured nozzle geometry for capacity optimization
- Removable induced air grille for roomside coil access
- Commissioning port with roomside access for balancing
- Mounting brackets with adjustments in two directions
- Durable powder coat finish
- ½" Sweat water coil connections
- Coil air vent

OPTIONS AND ACCESSORIES

- ½" thick foil-faced EcoShield, anti-microbial external insulation
- Coil drain valve
- ½" or ¾ MNPT water coil connections
- 12-inch, 18-inch or 24-inch stainless steel braided hoses
- Lay-in, narrow tee and drop face border types
- Coil lint screen
- Constant volume regulator