


Digital Control Terminal Units Retrofit • Variable Volume Model: DECV • Pressure Independent Control

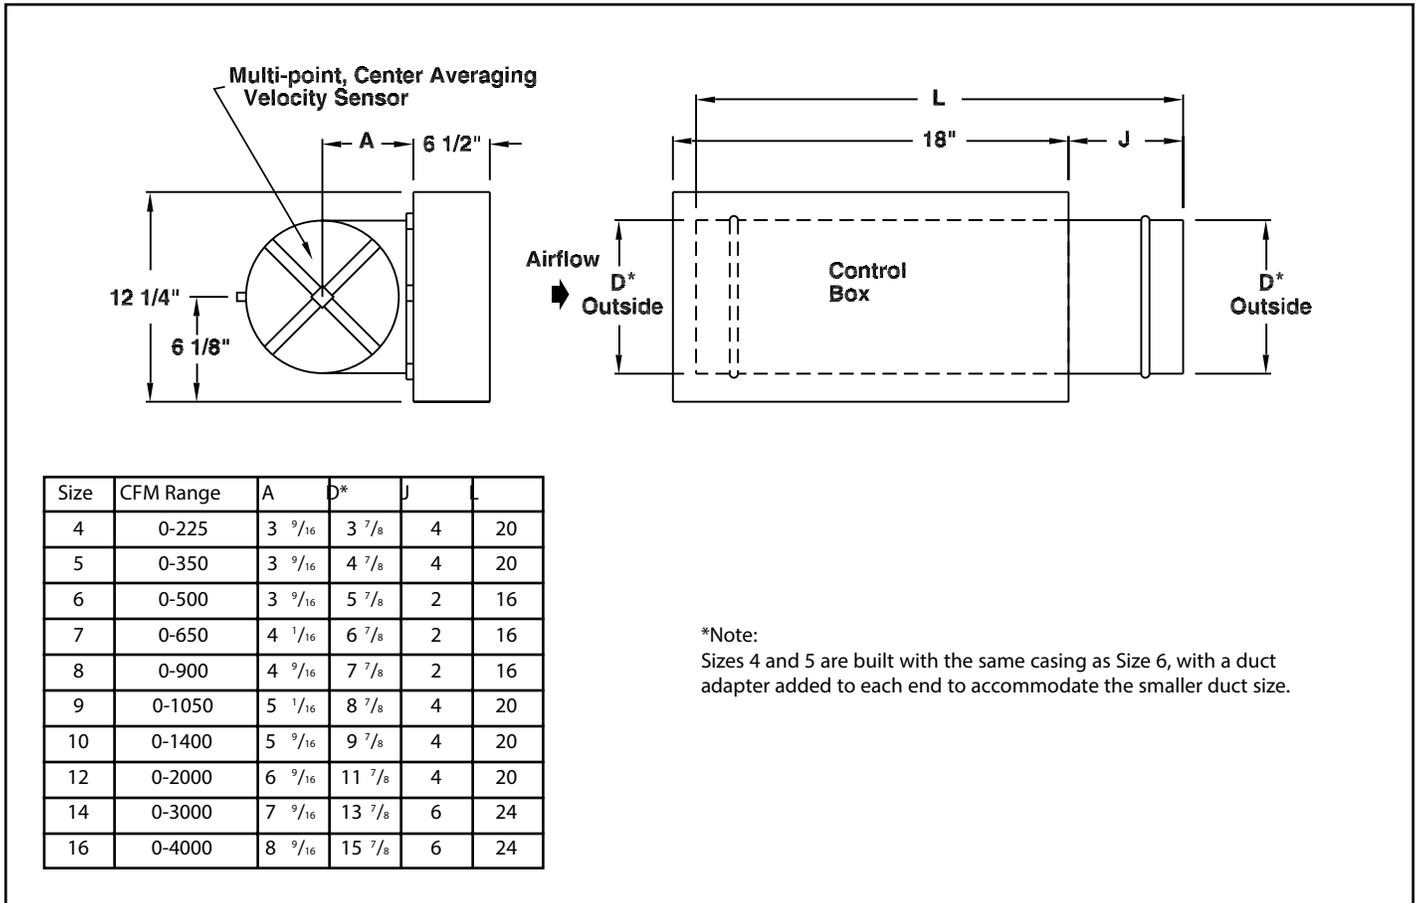

Accessories (optional)

- 24 volt control transformer
- Disconnect switch

- Check if provided
- Hanger brackets
 - Dust tight enclosure seal

- TITUS actuator
- _____

General Description

- Direct digital control package supplied by TITUS includes direct digital controller, damper actuator and flow transducer (all tested and calibrated.) Room sensor is optional.
- Direct digital control packages can be factory mounted by TITUS from various manufacturers. Consult your TITUS representative for specific availability.
- Tight close-off damper. Leakage is less than 2% of nominal cfm at 6" sp W.G.
- Multi-point inlet velocity sensor with center averaging.
- Gauge tees for cfm measurement.
- Choice of right or left hand control location. (Right hand is shown above.)
- Inlet and discharge connections fit inside standard round duct.
- Heavy gauge steel casing, uninsulated.