

## OMNI / OMNI-AA

- The Titus OMNI diffuser satisfies architectural as well as engineering criteria. Its strong, clean, unobtrusive lines harmonize with the ceiling system, without sacrificing performance.
- The curvature of the OMNI backpan works with the formed edges of the face panel to deliver a uniform 360° horizontal air pattern, without excessive noise or pressure drop
- The OMNI diffuser is an excellent choice for variable air volume systems. The air pattern remains tight and horizontal for effective room air distribution, even when the volume varies over a wide range.
- The face panel is constructed from 22-gauge steel or heavy gauge aluminum. The edges of the face panel are formed to a radius for a solid, crisp appearance. The formed edges also stiffen the face panel and assure a straight and level surface.



OMNI / OMNI-AA



retrofit

MRI compatible

wood grains

metric sizes

### MODELS:

OMNI / Steel

OMNI-AA / Aluminum

### FINISHES:

Standard Finish - #26 White

Optional Finish - Wood grains (See Wood grains Brochure for Finishes)

### OVERVIEW

Square Plaque


The Titus OMNI (steel plaque) & OMNI-AA (all-aluminum plaque) face diffusers that satisfy architectural and engineering criteria. Their strong, clean, unobtrusive lines harmonize with ceiling systems without sacrificing performance. The curvature of the OMNI & OMNI-AA backpans work with the formed edges of the face panel to deliver a uniform 360 degree horizontal air pattern, without excessive noise or pressure drop. They are an excellent selection for variable air volume systems.

### ADDITIONAL FEATURES

- The face panel of the OMNI is laser-welded to the four hanger brackets. This process provides the OMNI face with a smooth finish under any lighting conditions.
- The OMNI-AA is entirely constructed of aluminum, perfect for MRI applications.



See website for Specifications

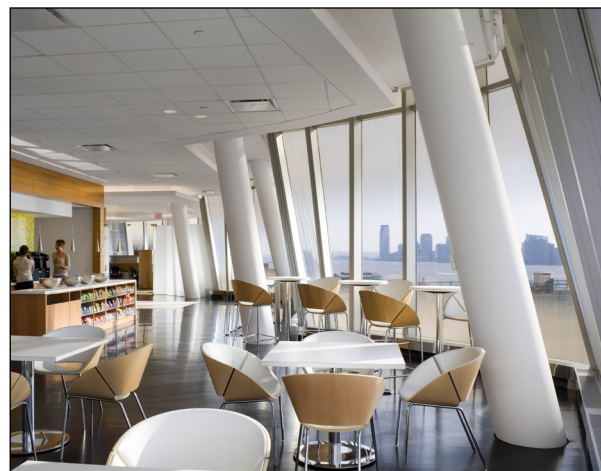

Several OMNI diffusers installed in the breakroom of a corporate office

- The face panel is held in place by four hook brackets that positively engage into slots in the backpan. The panel can be removed from the backpan for easy installation of the diffuser or for access to the optional damper.
- Optional factory-insulated R-6 foil-backed insulation available for 24 x 24" full face models, neck sizes 6-15.