


DIMENSIONS

VAB VERTICAL BELT DRIVE DIMENSIONS

Redefine your comfort zone™ | www.titus-hvac.com

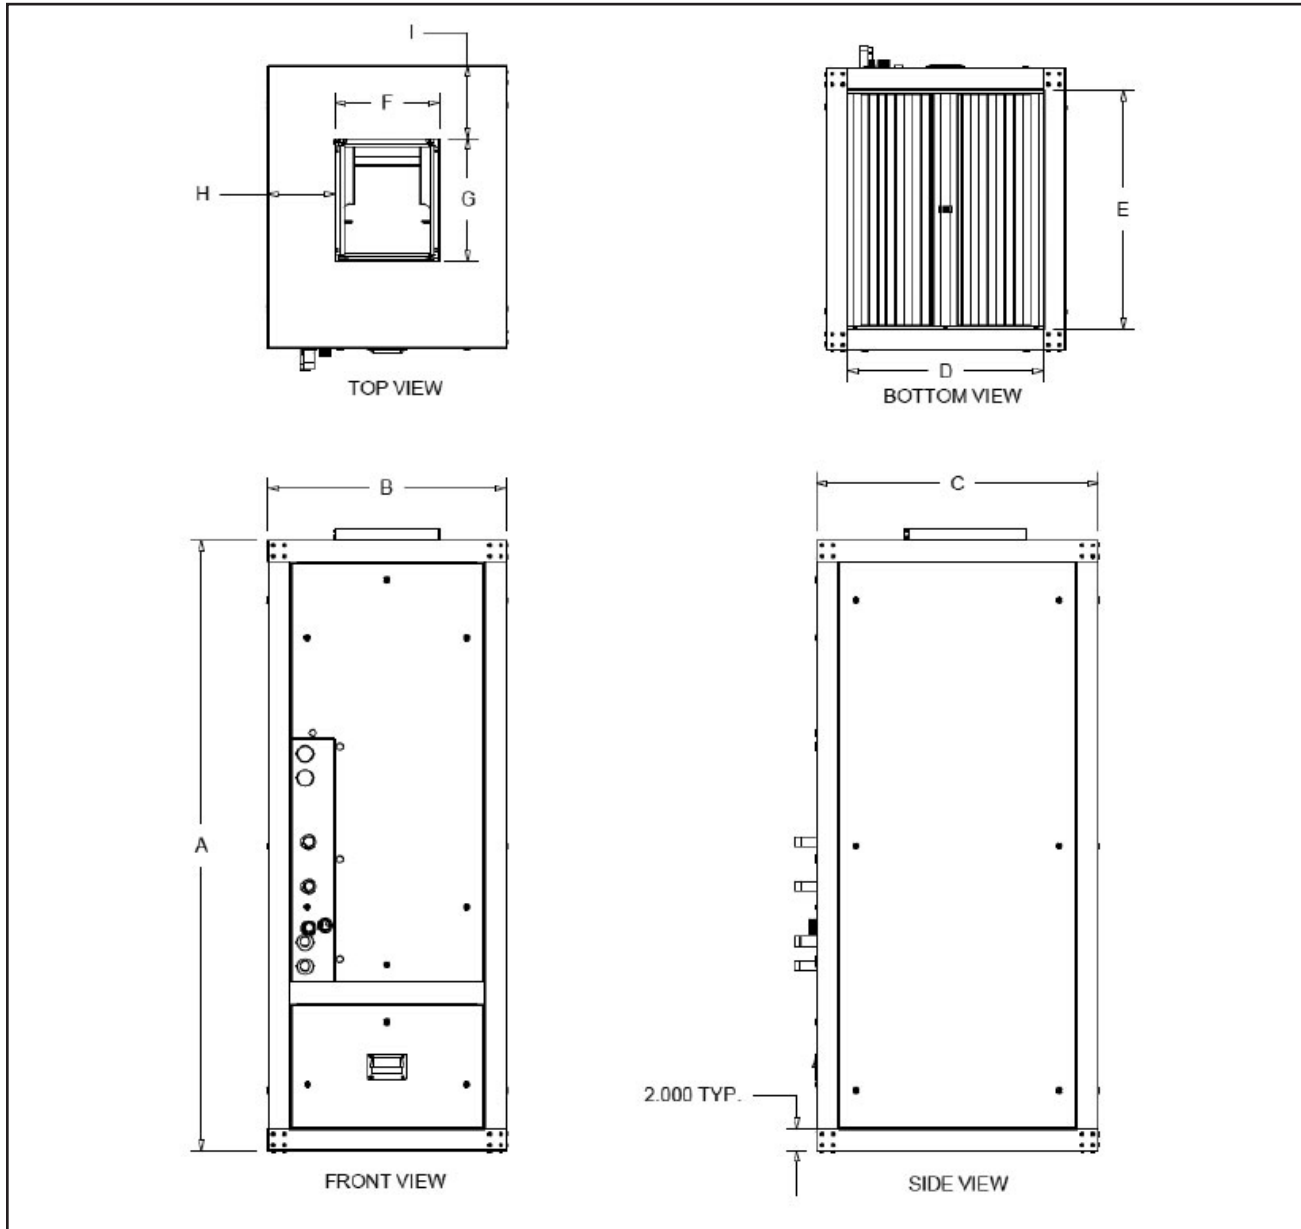

Model	A	B	C	D	E	F	G	H	I
VAB 08	56.0	22.0	26.0	18.0	22.0	9.1	11.1	5.9	7.9
VAB 12	56.0	22.0	26.0	18.0	22.0	12.7	11.1	5.9	7.9
VAB 16	64.0	30.0	26.0	26.0	22.0	14.0	12.3	9.5	7.5
VAB 20	64.0	30.0	26.0	26.0	22.0	16.5	14.5	7.5	5.5
VAB 30	75.0	52.0	30.0	48.0	26.0	19.5	16.8	18.0	7.0
VAB 40	75.0	52.0	30.0	48.0	26.0	19.5	16.8	18.0	7.0

DIMENSIONS

DIMENSIONS

VAB VERTICAL BELT DRIVE DIMENSIONS

VAB Coil Specifications					
Model	Fin Block H x W	Coil Type	Face Area	Rows	Water Conn. Header OD
8	14 X 20	HW	1.94	1	5/8"
	14 X 20	HW	1.94	2	
	(2) 12 X 16	CW	2.66	4	7/8"
12	14 X 20	HW	1.94	1	7/8"
	14 X 20	HW	1.94	2	
	(2) 12 X 16	CW	3	4	
16	18 X 20	HW	2.5	1	7/8"
	18 X 20	HW	2.5	2	
	(2) 15 X 18	CW	3.75	4	
20	22.5 X 20	HW	3.47	1	1 1/8"
	22.5 X 20	HW	3.47	2	7/8"
	(2) 15 X 23	CW	4.79	4	
30	39 X 22	HW	5.95	2	1 3/8"
	(2) 15 X 33	CW	6.88	4	1 1/8"
40	43.5 X 22	HW	6.65	2	1 3/8"
	(2) 15 X 45	CW	9.38	4	1 1/8"

Note: Standard filter rack only accepts 2" TA or Pleated filters. Double wall filter rack accepts 2" or 4" TA or pleated filters.

Filter	Unit Model					Filter Quantity					
						8	12	16	20	30	40
	12" X 24" X 2/4"	X	X	X	X	2	2	3	3		
20" X 25" X 2/4"	X	X	X	X					4	4	
Filter Total						2	2	2	3	4	4