


## Minimum Security Lattice Face

- Model:  SG-LFF • Steel  
 SG-LFF-AA • Aluminum

### General Construction

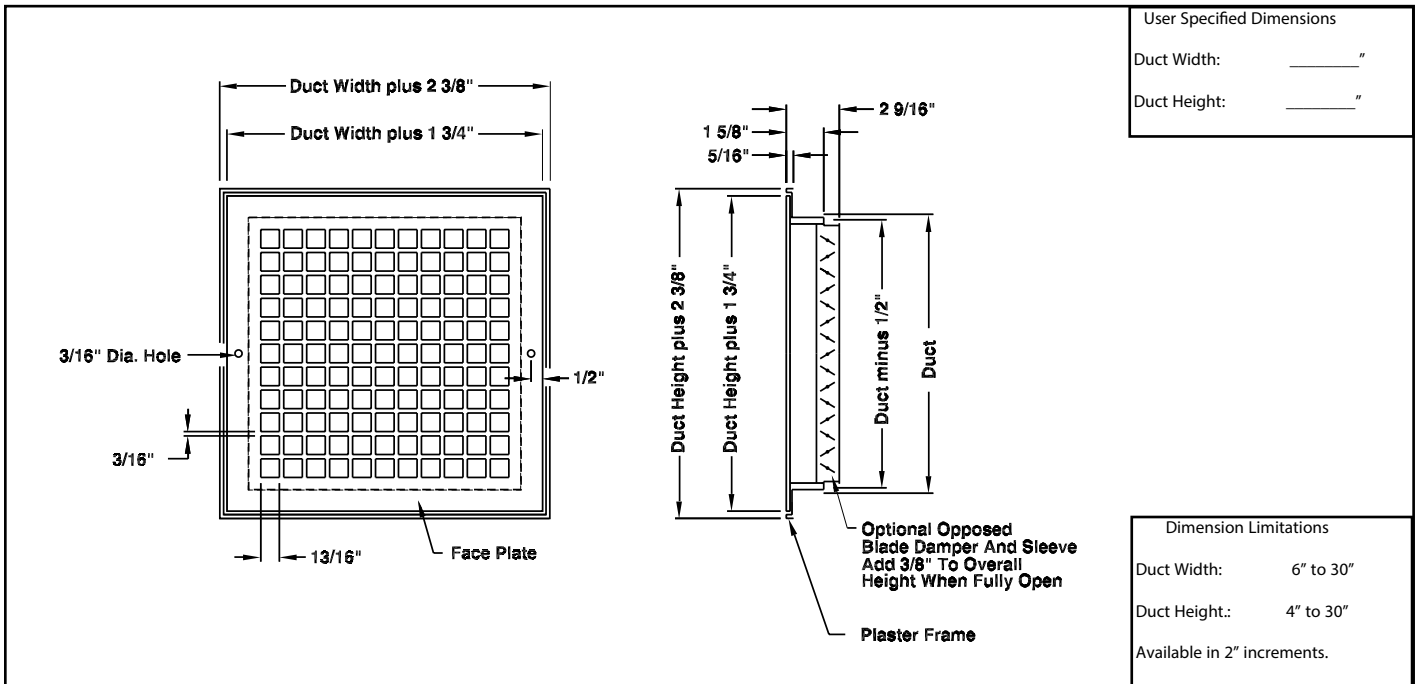

### Options and Accessories

- Face Operated Damper - Steel  
AG-15 steel opposed blade damper. Slot operated from face of the grille.
- Face Operated Damper - Aluminum  
AG-15-AA aluminum opposed blade damper. Slot operated from face of the grille.
- Face Plate with Round Hole Pattern  
5/16" diameter holes on 7/16" staggered centers.
- Mill Finish

NOTE: These models are attached to the wall or ceiling using screws inserted through the face of the grille sandwiching it to the wall or ceiling. Screws to be provided by others due to varying wall and ceiling characteristics. All screws should comply with local requirements and the controlling engineer's specifications.

### General Description

The TITUS model SG-LFF can be used in any area where additional security is required. This minimum security lattice face is an economical alternative return grille for minimum security areas.

### Standard Construction Details

- Face Plate - Steel  
12 gauge steel with 13/16" square holes on 1" centers - provides 66% free area.
- Face Plate - Aluminum  
1/8" aluminum with 13/16" square holes on 1" centers - provides 66% free area.

3/16" diameter screw holes provided in face plate.  
Tamper proof screws provided by others.

· Finish  
#26 White.

· Screw Hole Location  
Screw hole quantities and locations vary by duct size. Please consult the factory for screw hole quantity and location.