

Redefine your comfort zone.™ | www.titus-hvac.com



vav diffusers



retrofit

light-powered

dual-function

energy solutions



Table of Contents

www.titus-hvac.com | Redefine your comfort zone.™

VAV DIFFUSER PRODUCTS

VAV Diffusers Products	L3
------------------------------	----

OVERVIEW

Design Features.....	L4
----------------------	----

APPLICATION GUIDELINES

Application Guidelines.....	L5
-----------------------------	----

VAV DIFFUSERS

Thermal - T ₃ SQ-4	L7
Dimensions.....	L8
Digital - T ₃ SQ-2	L9
Dimensions.....	L10
Accessories	L11
Non-VAV - T ₃ SQ-0.....	L12
Dimensions.....	L13
Border Types.....	L14
Performance Data.....	L15

SOLAR VAV DIFFUSER

Helios.....	L17
Dimensions.....	L18
Overview	L19
Performance Data.....	L20

ICONS

Icons Key	L24
-----------------	-----

PAGES: L4-L16

vav diffusers



T₃SQ-4


THERMAL VAV DIFFUSERS

Configurations

- T₃SQ-4 - heating/cooling

Features

- Thermally powered VAV control
- Center induction
- Minimum airflow adjustment
- Enhanced pattern controllers for easy adjustment

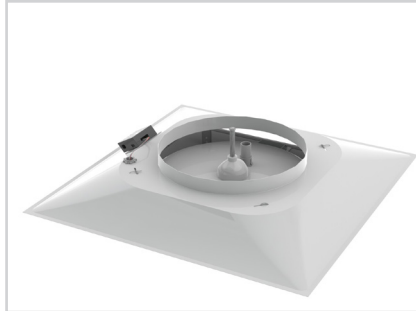

T₃SQ-2

DIGITAL VAV DIFFUSERS

Configurations

- T₃SQ-2 - heating/cooling

Features

- DDC stand-alone VAV control
- DDC BACnet VAV control
- DDC LonWorks VAV control
- Optional inlet heater



T₃SQ-0

NON-VAV DIFFUSERS

Configurations


- T₃SQ-0 - non-VAV supply/return

Features

- Designed to match the T₃SQ-4 thermal VAV diffusers

PAGES: L17-L21

solar vav diffuser

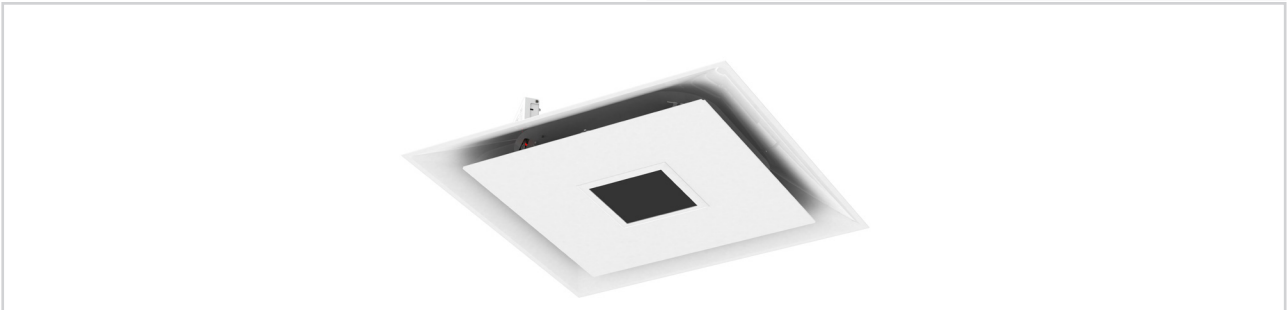

HELIOS

SOLAR VAV DIGITAL DIFFUSER

- Utilizes EnOcean's wireless technology
- Uses ambient light energy for self-powering capability
- Requires no building power
- Installation is simple and easy
- Requires no complicated cabling or wiring
- 3 week power storage capability

DESIGN FEATURES

PERSONALIZED VAV SYSTEMS


Titus brings both accuracy and flexibility to the variable air volume (VAV) market with T₃SQ VAV diffusers. The T₃SQ combines the functions of a VAV terminal and a high performance diffuser in one. The T₃SQ modulates the air volume delivered to a zone to accurately control cooling and heating conditions. The unique variable geometry design results in maximum air distribution effectiveness at any airflow for superior comfort conditions.

T₃SQ adds application flexibility by being able to operate stand-alone with thermal or digital controls.

In addition to a superior performance VAV unit, the T₃SQ is solidly constructed with 18-gauge steel. Available in many frame styles, the T₃SQ can be installed in almost any ceiling as easily as a standard diffuser. The architecturally pleasing design coordinates with any office environment.

For applications that require system simplicity, proven technology and superior comfort, specify the Titus T₃SQ series of VAV diffusers.


- Variable geometry diffuser design maintains jet velocity at all flow rates, varying air flow pattern for optimal performance
- Separate cooling and heating setpoints on thermal T₃SQ
- Supply air temperature provides automatic cooling/heating changeover on configurations -4 and -2
- T₃SQ-2, digital, can control up to 14 secondary diffusers
- Optional electric inlet heater for applications requiring supplemental heat (T₃SQ-2 only)
- Provides accurate, personal environmental temperature control to improve productivity in the office environment

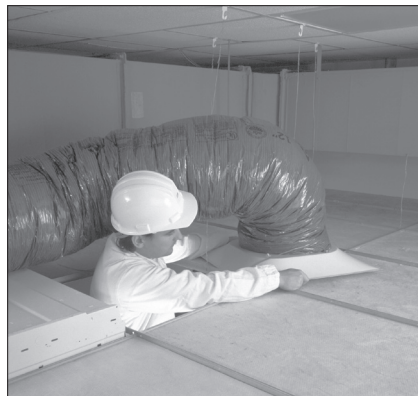

Installation and relocation are made easy

- Superior air distribution performance provides greater entrainment, higher Air Diffusion Performance Index (ADPI) and better ventilation effectiveness for Indoor Air Quality (IAQ)
- Lower cost per zone of control than typical VAV terminal with separate diffusers
- Renovate existing offices or add zones in problem areas to solve individual comfort problems
- Constant volume systems can easily become multi-zoned VAV systems for “big building comfort” on a small building budget
- Easy and inexpensive to relocate zones, ideal for use where office space may be reconfigured periodically
- Easy to install and operate
- Unique center induction on thermal T₃SQ-4 ensures accurate readings even at low flows


Thermal VAV Diffuser

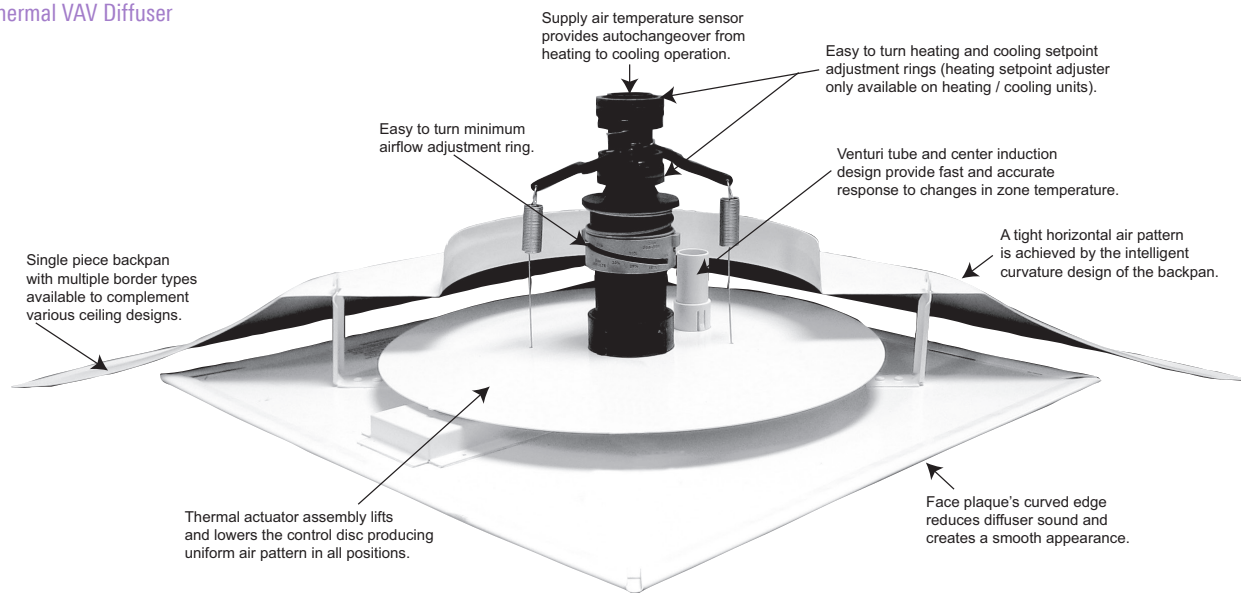

**CONSTANT VOLUME SYSTEM
APPLICATION OPTION**

The Titus T₃SQ system is ideal for use with a constant volume system. The T₃SQ gives all the advantages of a VAV system at low pressure conditions and reduced installation cost. The T₃SQ is a low pressure, pressure dependent, variable air volume (VAV) system. The T₃SQ is designed to operate around 0.15" - 0.20" inlet pressure. This system provides zoned comfort, which is not always possible with a typical constant volume system.


1. It is recommended that a static pressure controller such as the Titus AECV/AQCV (Control Codes PR01, PD01) be installed into a constant volume system when more than 30 percent of the system airflow is

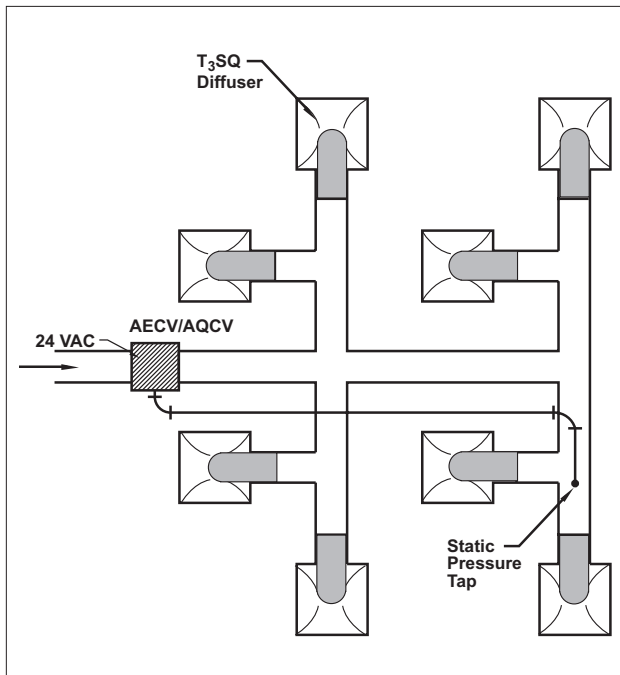

Typical static pressure control by throttling supply air using a AECV/AQCV (Control Code PD01) terminal

put under the control of T₃SQ diffusers. This minimizes the possibility of delivering excess air when a portion of the T₃SQ are operating at part load conditions.

2. When an entire constant volume system uses T₃SQ zone control, a AECV/AQCV box should be implemented. The Titus AECV/AQCV pressure control terminal should be sized for 80 percent of the total supply flow, less the airflow of the smallest zone.
3. Care must be taken when sizing and installing a AECV/AQCV. The unit should be installed as far downstream from the fan as is practical to maximize supply and return air mixing. This reduces the risk of the unit cycling on high or low.

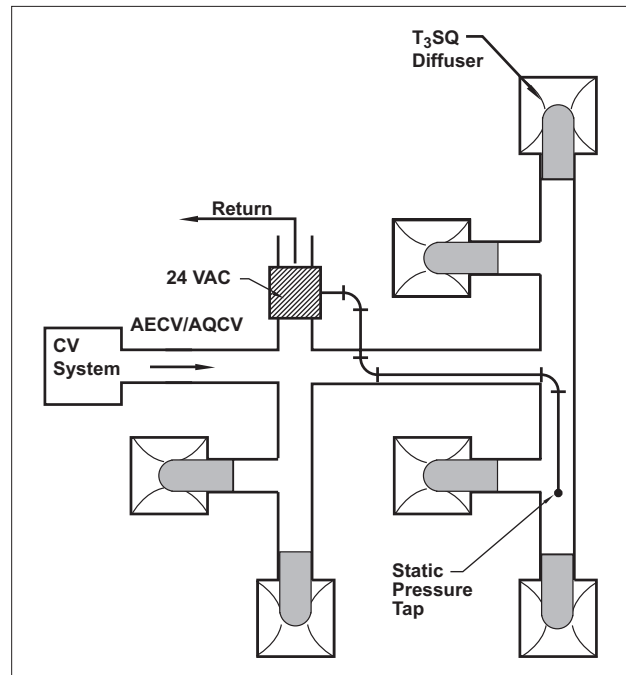


Typical static pressure control by bypassing supply air using a AECV/AQCV (Control Code PR01) terminal

**VARIABLE AIR VOLUME SYSTEM
APPLICATION OPTION**

The Titus T₃SQ system is ideal for use in buildings where the advantages of zoned variable air volume (VAV) systems normally cannot be used due to budget issues or plenum space constraints.

Special care should be taken when determining the static pressure of a VAV system with T₃SQ units.

Digital VAV Diffuser

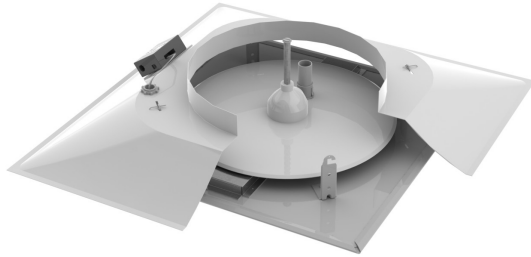

PRIMARY / SECONDARY

T₃SQ-2 diffusers are all shipped as secondary units. Determination of primary units is made through plug and play cable connections to the thermostat. The units connected to the thermostat are the primary units. All units daisy chained from the primary are secondaries. Secondary diffusers must be connected to a primary diffuser in order to operate. One power module is required for every 15 diffusers with or without optional electric reheat. Power module requires 120, 208, 240, 277 VAC line voltage input.

The 4-pin mini-fit cables provide 24VAC power and communication between diffusers. This cable should be used between the power module and the first diffuser and also to connect a primary unit to a secondary unit.

The 4-pin mini-fit cables provide 24VAC power and control signal between diffusers. This cable should be used between diffuser and primary controller/thermostat and between primary and secondary units.


The Primary Communications Module is a central data collection and distribution point for up to 60 VAV field diffusers. The device features four diffuser channel inputs, which can accommodate up to 15 diffusers each. This allows the users to interface with 60 diffusers per communication module through a building management system. The interface software also has a server application which allows all communication modules on site to be accessed through the building management system from the IP address of each module. Primary communication modules are available in the following communication protocols:

- Standard Primary Communication module (Stand-Alone)
- Primary Communications module with Lonworks gateway
- Primary Communications module with BACnet gateway (MS/TP) (TCP/IP)

Primary/Secondary Wiring


One primary unit can control up to 14 secondary units.

P.S. = Power Supply
T = Room Sensor

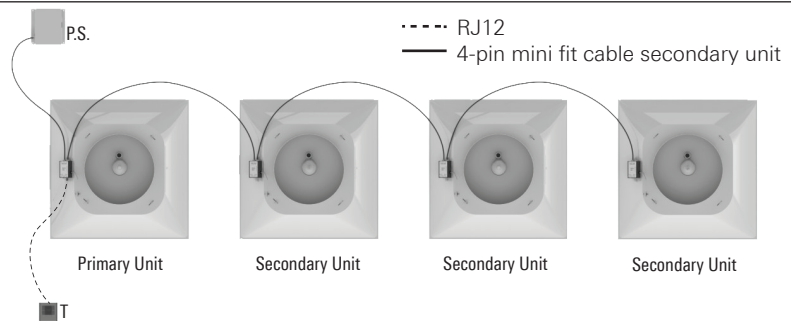


Primary/Secondary Wiring With MCM (Primary Communication Module)

P.S. = Power Supply
T = Room Sensor
MCM = Primary Communication Module

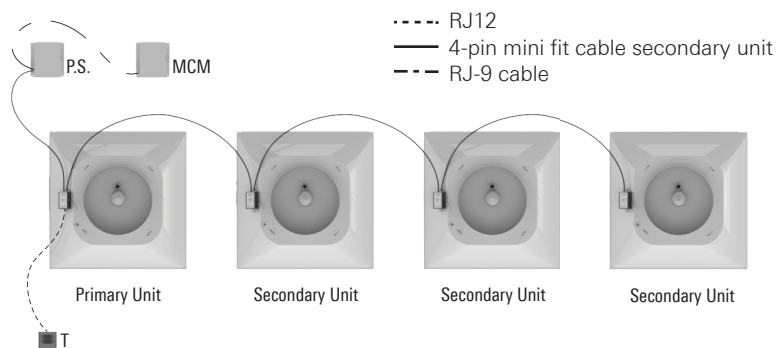

T3SQ-4

- The T₃SQ-4 is a thermal variable volume diffuser. The diffuser maintains space temperature by varying the volume of air delivered to the space. The amount of air delivered will depend on the Supply Air Temperature (SAT) (-4 only), the room temperature setpoint, and the room temperature.
- Available in heating/cooling (-4) configuration
- As the volume of air is decreased by the control disc, the velocity of air is increased thereby maintaining the longest throw and best entrainment ensuring superior air distribution at all damper positions
- The curvature of the backpan works with the formed edges of the face panel to deliver a tight horizontal air pattern without excessive noise or pressure drop over the full range of operation
- The T₃SQ-4 uses a center induction plug to accurately measure the room temperature. This eliminates the need for a wall-mounted thermostat or sensor and provides the most accurate way of measuring the room air temperature.
- Adjustment of the room temperature setpoint is achieved by rotating the blue (cooling) only adjustment ring

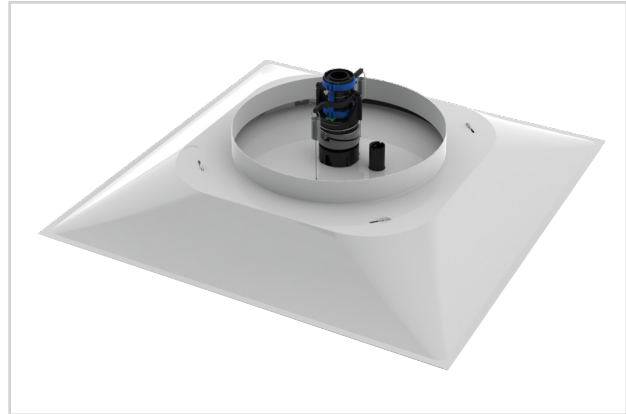

T3SQ-4

MODEL:

T₃SQ-4 / Heating & Cooling

FINISH:

Standard Finish - #26 White

OVERVIEW


The T₃SQ-4 works in both heating and cooling applications. The curvature of the backpan works with the formed edges of the face panel to deliver a tight horizontal air pattern without excessive noise or pressure drop over the full range of operation. As the volume of air is decreased by the control disc, the velocity of air is increased, thus maintaining the longest throw and best entrainment. This ensures superior performance at all damper positions.

ADDITIONAL FEATURES

- Adjustment of the green tab offset creates a temperature deadband for heating and cooling setpoints
- Adjustment of minimum airflow is achieved by rotating the grey minimum airflow adjustment ring
- The face panel and backpan are constructed from 18-gauge steel. The formed outer edge also assures a straight and level surface.



See website for Specifications

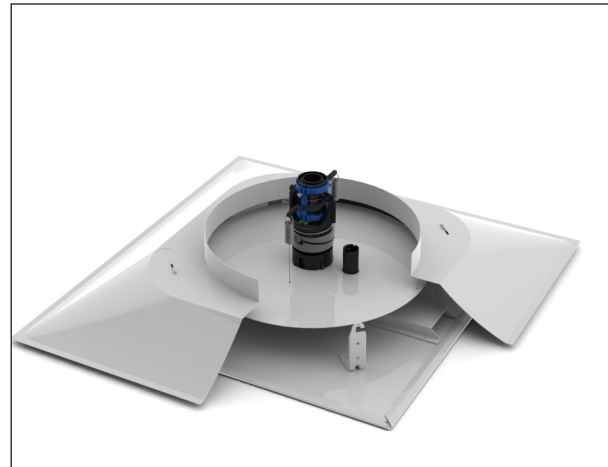


Cutaway view of the T₃SQ-4 diffuser



T₃SQ-4 UNIT DIMENSIONS

T₃SQ-4 - Border Type 3

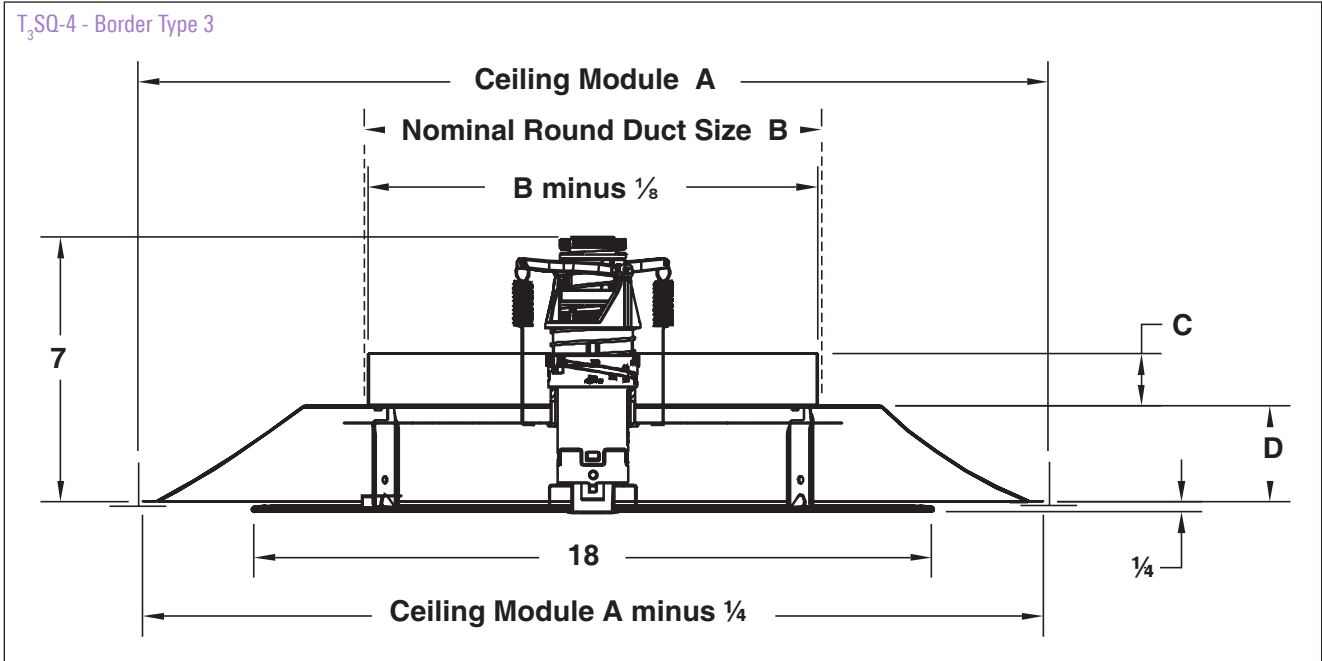

Ceiling Module A	Nominal Round Duct Sizes B	C	D
24	6	1 ¹ / ₈	3 ⁵ / ₈
	8	1 ¹ / ₄	3 ³ / ₄
	10, 12	1 ³ / ₈	3 ⁷ / ₈

Ceiling Module A	Face Size	Nominal Round Duct Size	Border Type
24 x 24	24 x 24	6, 8, 10, 12	1, 2, 3, 4, NT

T3SQ-2

- The T₃SQ-2 is an electronic variable volume diffuser. The diffuser maintains space temperature by varying the volume of air delivered to the space. The amount of air delivered will depend on the Supply Air Temperature (SAT) (-4 only), the room temperature setpoint, and the room temperature.
- As the volume of air is decreased by the control disc, the velocity of air is increased thereby maintaining the longest throw and best entrainment. This ensures superior air distribution at all damper positions.
- The curvature of the backpan works with the formed edges of the face panel to deliver a tight horizontal air pattern without excessive noise or pressure drop over the full range of operation
- T₃SQ-2 primary diffusers are created by connecting the diffuser to a wall mounted controller/thermostat using the RJ-12 control cable
- T₃SQ-2 secondary diffusers are created by connecting the diffuser to a primary unit using the 4-pin mini-fit control cable
- Up to fifteen T₃SQ-2 diffusers can be powered by a single power module using the 4-pin mini-fit power cable



T3SQ-2



energy solutions

MODEL:

T₃SQ-2 / Heating & Cooling

FINISH:

Standard Finish - #26 White

OVERVIEW


The Digital T₃SQ-2 is the most energy efficient VAV diffuser on the market. It requires 10 times less power than the competitor's model. The communication modules allow for interfacing with building management systems for all major communication protocols. With user friendly software to control and commission diffusers, the Digital T₃SQ-2 is the next level of VAV diffusers on the market.

ADDITIONAL FEATURES

- The position of the control disc is varied by a linear drive actuator mounted on the control disc
- The face panel and backpan are constructed from 18-gauge steel. The formed outer edge also assures a straight and level surface.




See website for Specifications

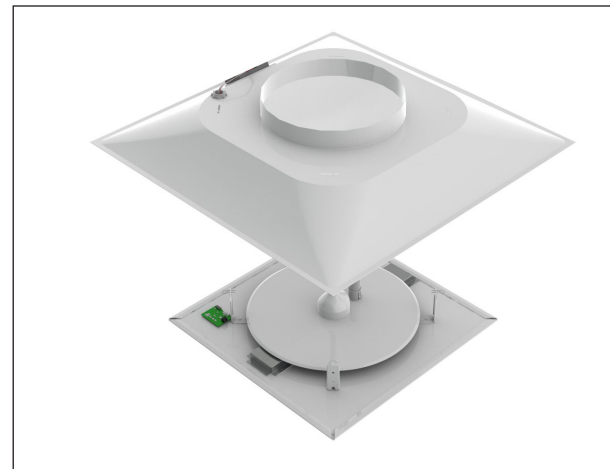

Exploded view of the T3SQ-2 digital diffuser

T₃SQ-2 UNIT DIMENSIONS

T₃SQ-2 / Border Type 3

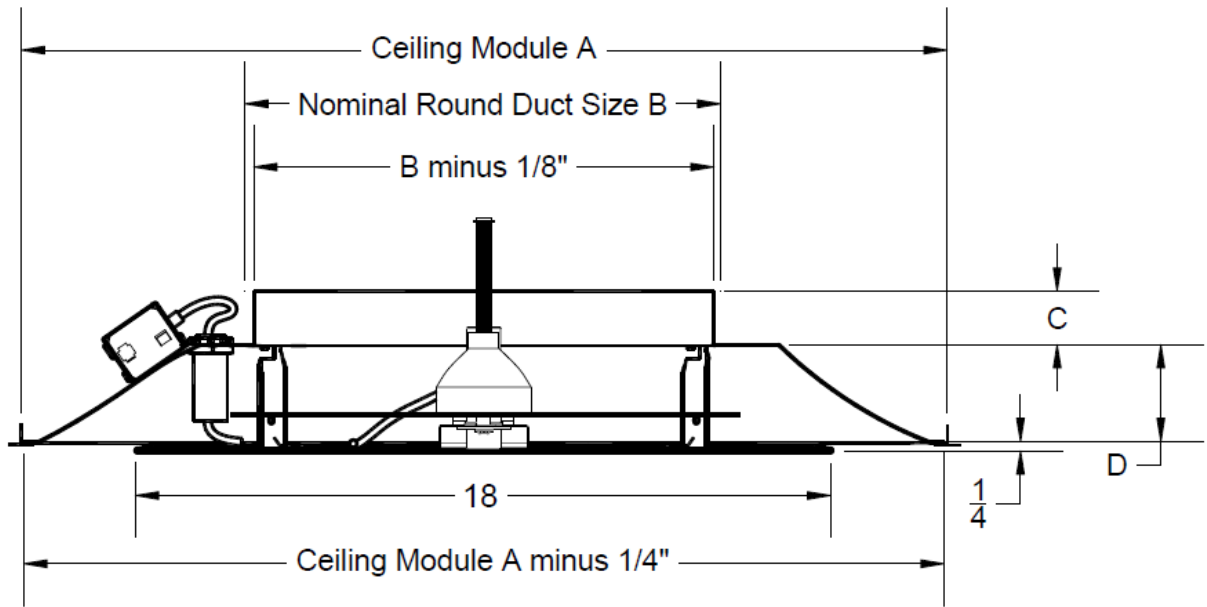

Ceiling Module A	Nominal Round Duct Sizes B	C	D
24	6	1 ¹ / ₈	3 ⁵ / ₈
	8	1 ¹ / ₄	3 ³ / ₄
	10, 12	1 ³ / ₈	3 ⁷ / ₈

Ceiling Module A	Face Size	Nominal Round Duct Size	Border Type
24 x 24	24 x 24	6, 8, 10, 12	1, 2, 3, 4, NT


PRIMARY COMMUNICATION MODULE

- Available with Standard (Titus) communication module, BACnet, or Lonworks gateway
- MCM is the central data collection and distribution point for up to 60 VAV field diffusers per module
- Features four diffuser channel inputs which can accommodate up to 15 diffusers per channel, per communication module (MCM)
- Interface software is designed as a commissioning tool as well as for data monitoring, logging, and fault finding
- Software is supplied with each shipment




CONTROLLER/THERMOSTAT

- Each primary T3SQ-2 diffuser requires a controller / thermostat
- 24VAC RJ-12 control cable connection
- Room sensor with LCD display real time clock for night set-back & control disc position display
- Provides Setpoint Temperature adjustment & room temp display
- Interfaces with a USB module in order to interface with software for further functionality
- Dimensions are 3" x 3 1/4"

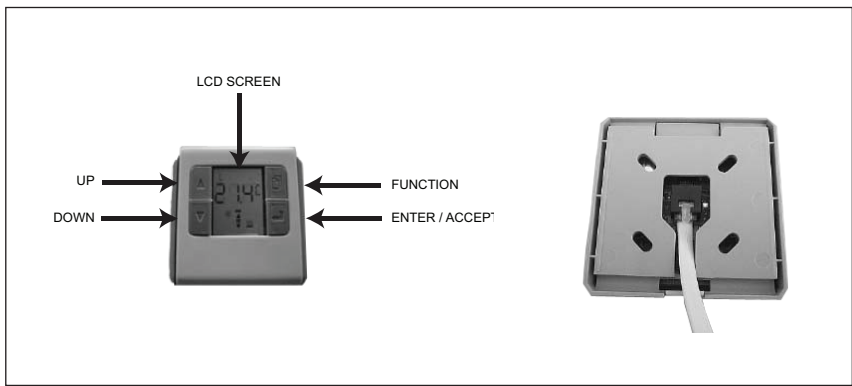

OPTIONAL INLET ELECTRIC HEATER

- Installs into neck of diffuser
- 120V, 208V or 277V single phase input power (field connect)
- Black heat element
- SCR modulating heater control
- Ships loose for field installation
- Integrated wiring interface box
- Automatic reset thermal cutout
- Manual reset secondary protection

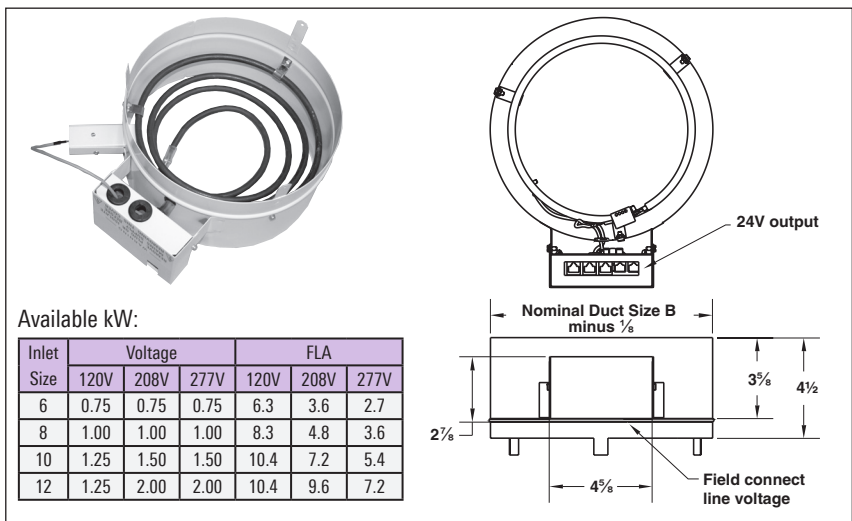

Available kW:

Inlet Size	Voltage			FLA		
	120V	208V	277V	120V	208V	277V
6	0.75	0.75	0.75	6.3	3.6	2.7
8	1.00	1.00	1.00	8.3	4.8	3.6
10	1.25	1.50	1.50	10.4	7.2	5.4
12	1.25	2.00	2.00	10.4	9.6	7.2

24V output

Nominal Duct Size B minus 1/8"

Field connect line voltage

CABLES (HEATER CONNECTION)

- Blue RJ-12 (8-pin straight through pinout) for control and power
- Modular connector that attaches the ribbon cable and RJ-12 to heater

RELIEF RINGS

- Used to bypass supply air into the ceiling plenum as the diffuser turns down
- Available for both digital and thermal configurations
- Effectively reduces inlet size by 2 inches



T₃SQ-0

- The T₃SQ-0 is a non-VAV supply or return diffuser with a center induction cap designed to match the T₃SQ-4 thermal VAV diffusers
- The curvature of the backpan works with the formed edges of the face panel to deliver a tight horizontal air pattern, without excessive noise or pressure drop over the full range of operation
- The T₃SQ diffuser is designed to satisfy architectural, as well as engineering criteria. The strong, clean, unobtrusive lines harmonize with the ceiling, without sacrificing performance.
- The face panel and backpan are constructed from 18-gauge steel. The formed outer edge also assures a straight and level surface.



T3SQ-0

MODEL:

T₃SQ-0 / Heating & Cooling

FINISH:

Standard Finish - #26 White

OVERVIEW


The T3SQ-0 is a non-VAV supply or return diffuser with a center induction cap designed to match the T3SQ-4 thermal VAV diffusers.



See website for Specifications

T₃SQ-0 UNIT DIMENSIONS

T₃SQ-0 / Border Type 3

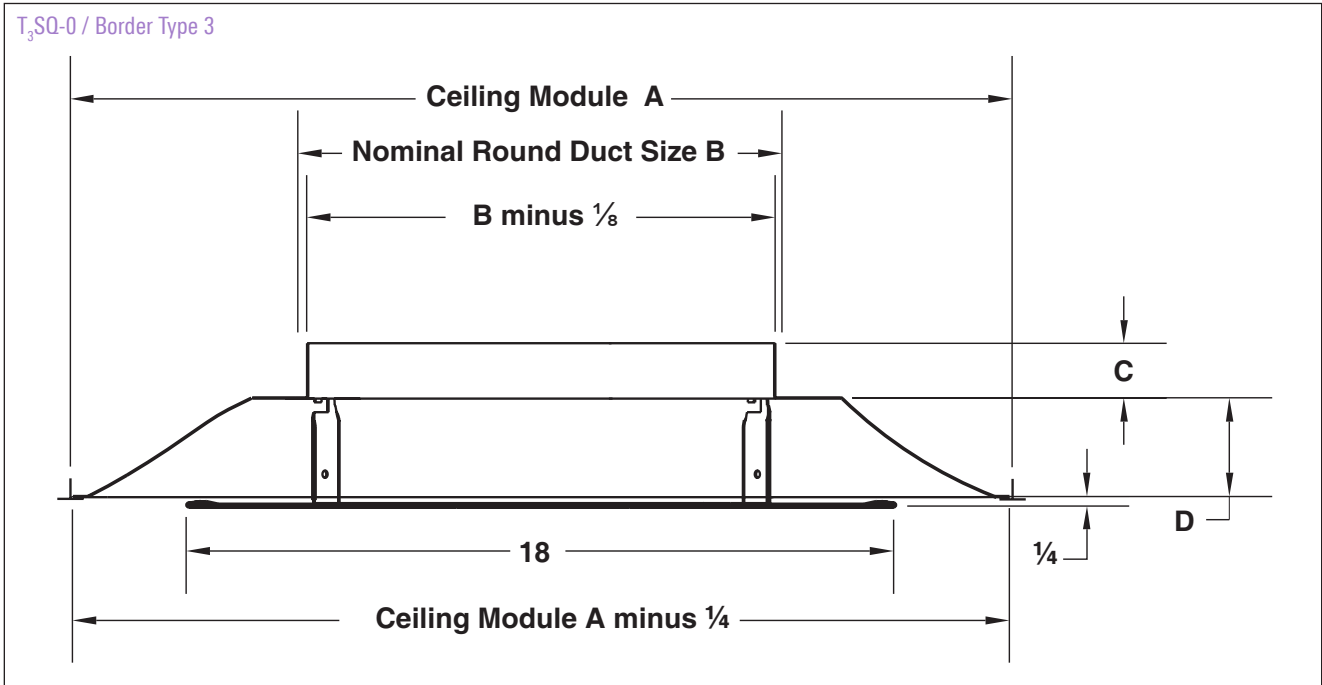


Ceiling Module A	Nominal Round Duct Sizes B	C	D
24	6	1 ¹ / ₈	3 ⁵ / ₈
	8	1 ¹ / ₄	3 ³ / ₄
	10, 12	1 ³ / ₈	3 ⁷ / ₈

Ceiling Module A	Face Size	Nominal Round Duct Size	Border Type
24 x 24	24 x 24	6, 8, 10, 12	1, 2, 3, 4, NT


BORDER TYPES

Border Type 1 Rapid Mount Frame (for surface mounting applications)


The T₃SQ series of diffusers is not available with standard Border Type 1. For surface mounting applications, the TRM optional Rapid Mount Frame can be used. Using border option TRM, the T₃SQ diffusers are shipped with Border Type 3 (lay-in). The TRM frame is shipped separately for field installation. Once the TRM is installed, the T₃SQ diffuser simply lays into the frame. This option allows access into the ceiling after installation.

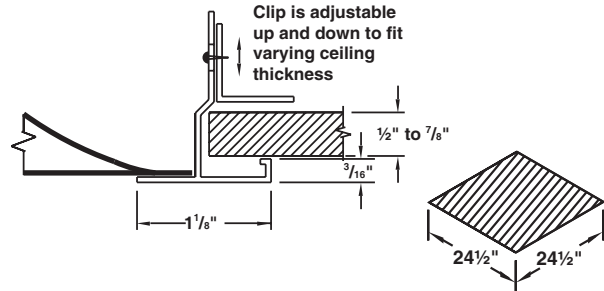


Border Type 2 (Snap-In)

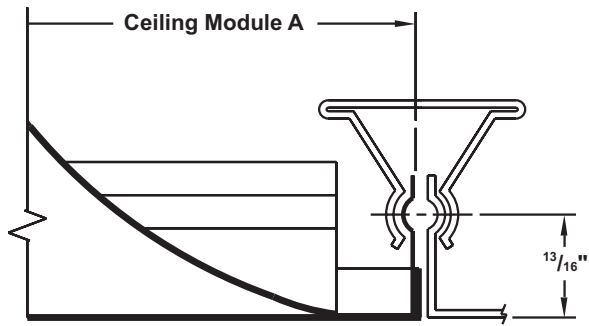

Border Type 4 (Spline)

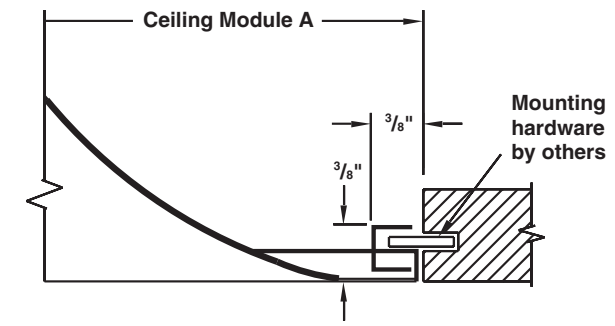


Border Type NT

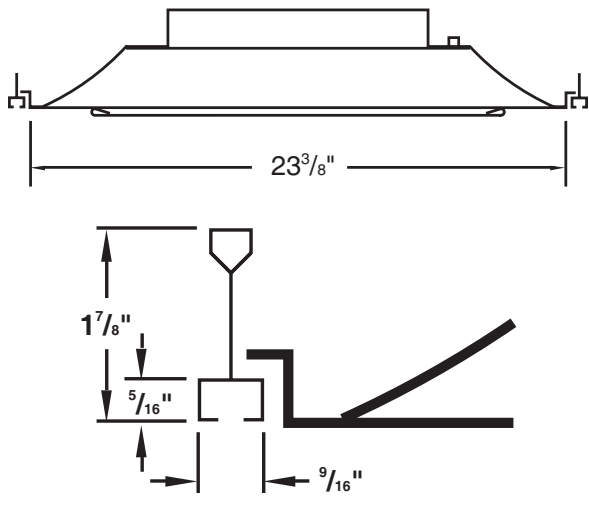

Face Plaque Installation

Installation is completed by lining up the hooks on the face plaque assembly with the corresponding slot

Easy three step hook installation for the face plaque

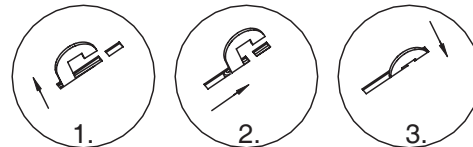


T₃SQ MAXIMUM FLOW SELECTION

Inlet Size	Neck Velocity Velocity Pressure	400 0.010	500 0.016	600 0.022	700 0.031	800 0.040	900 0.050	1000 0.062
6"	Static pressure	0.016	0.024	0.037	0.048	0.064	0.082	0.100
	Total Pressure	0.026	0.040	0.059	0.079	0.104	0.132	0.162
	cfm	79	98	118	137	157	177	196
	NC	5	10	14	17	20	23	25
	Throw, ft	1-2-3	1-2-4	2-3-5	2-3-6	2-3-7	3-4-7	3-4-8
8"	Static pressure	0.021	0.032	0.047	0.063	0.083	0.106	0.130
	Total Pressure	0.031	0.048	0.069	0.094	0.123	0.156	0.192
	cfm	140	175	209	244	279	314	349
	NC	8	13	17	20	23	25	28
	Throw, ft	2-3-5	2-3-7	2-4-8	3-5-9	3-5-10	4-6-10	4-7-11
10"	Static pressure	0.030	0.047	0.069	0.093	0.122	0.155	0.190
	Total Pressure	0.040	0.063	0.091	0.124	0.162	0.205	0.252
	cfm	218	273	327	382	436	491	545
	NC	14	19	23	26	29	31	34
	Throw, ft	3-4-8	4-5-10	4-6-11	5-8-12	6-9-13	6-10-14	7-10-14
12"	Static pressure	0.048	0.075	0.109	0.147	0.192	0.244	0.301
	Total Pressure	0.058	0.091	0.131	0.178	0.232	0.294	0.363
	cfm	314	393	471	550	628	707	785
	NC	24	29	33	36	39	41	44
	Throw, ft	4-6-11	5-8-12	6-9-13	7-10-14	8-11-15	9-11-16	10-12-17

AIR DISTRIBUTION AT VARIOUS DAMPER POSITIONS

The performance of the T₃SQ diffuser is related to supply static pressure and size. If the supply static pressure is held at a constant value and the VAV diffuser damper is throttled to a closed position, the airflow pattern is changed from a square pattern to a star pattern. The isovel in the adjacent illustration demonstrates this pattern change. With the reduction of cfm, throw does not decrease as in standard diffusers. As the damper closes the discharge velocity is slightly increased, minimizing throw reduction. With a fixed inlet pressure, the sound values have very small changes of intensity as the damper is modulated.

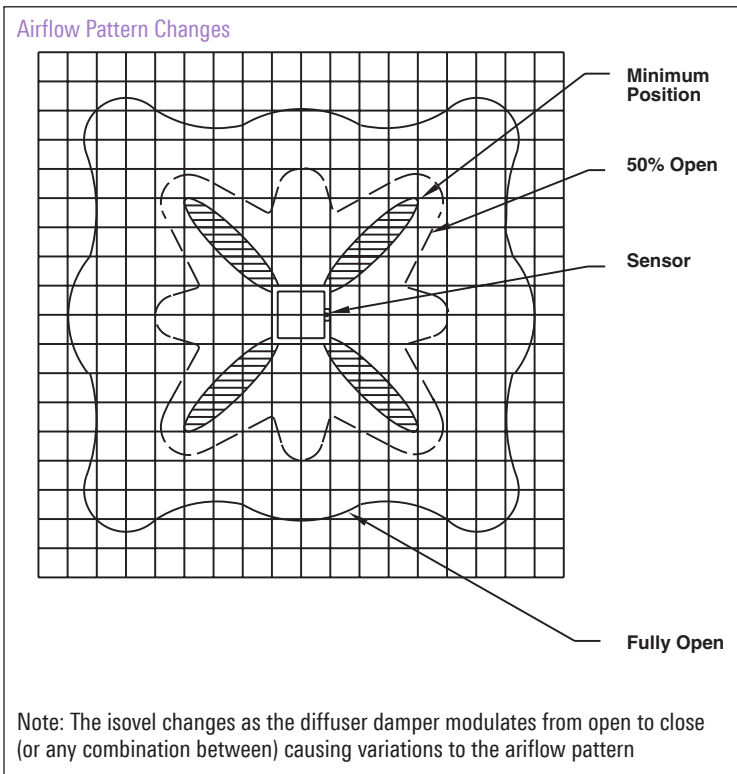

AHRI Directory of Certified Performance

AHRI Rating Data			Inlet Size	6" Inlet	8" Inlet	10" Inlet	12" Inlet														
Standard Ratings Sound Power Level, dB	3. Airflow, cfm			147	262	409	589														
	4. Min. Operating Pressure, in H ₂ O			0.091	0.108	0.142	0.204														
	5. Max. Inlet Static Pressure @ 400 fpm Neck Velocity, in H ₂ O			0.116	0.196	0.392	0.565														
	6. Rated with Pressure Relief, yes/no			n	n	n	n														
	Discharge	Standard Airflow Fully open damper 750 fpm Neck Velocity	Minimum Differential Static Pressure, in H ₂ O	Hz Octave Band Center Frequency	125	36	38	46	53												
					250	37	40	48	56												
					500	34	36	42	50												
					1000	30	34	39	44												
					2000	21	29	32	36												
					4000	+	19	23	28												
	Discharge	Standard Airflow Throttled Damper 400 fpm Neck Velocity	Max. Inlet Static Pressure, in H ₂ O	Hz Octave Band Center Frequency	125	+	44	46	50												
					250	36	52	54	55												
					500	40	57	58	60												
					1000	34	51	55	58												
2000					23	44	48	52													
4000					+	37	42	47													
<p>Note: Sound Power levels below values shown in this table shall be listed as below significance. Use a plus sign (+) to indicate below significance.</p> <table border="1"> <thead> <tr> <th>Hz Octave Band</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td>Sound Power Level, dB</td> <td>36</td> <td>29</td> <td>26</td> <td>22</td> <td>19</td> <td>17</td> </tr> </tbody> </table>								Hz Octave Band	125	250	500	1000	2000	4000	Sound Power Level, dB	36	29	26	22	19	17
Hz Octave Band	125	250	500	1000	2000	4000															
Sound Power Level, dB	36	29	26	22	19	17															

Performance data is presented for the T₃SQ diffuser with the internal VAV damper in full open position

Solar VAV Diffusers

vav diffusers

Helios

- Fully self-contained solar powered unit
- Digital precision with the narrow dead band between set points
- Low install and maintenance costs
- Wireless thermostatic control
- Simple push button commissioning
- Up to 15 diffusers can be configured on single zone
- Scalable Plug & Play functionality- standalone unit easily converted to wireless thermostat
- Architectural OMNI platform for clean look
- Industry-exclusive solar and wireless technology



HELIOS

Redefine your comfort zone.™ | www.titus-hvac.com



dual-function

light-powered

retrofit

energy solutions

MODEL:

Helios / Solar-Powered


FINISH:

Standard Finish - #26 White

OVERVIEW

Helios is a brand new line of digital diffusers powered by ambient light. It automatically delivers just the right amount of warm or cool air using a unique digital logic system for more accurate temperate bands. Feel the difference in your comfort, see the difference in your energy bills. When it comes to VAV diffusers, it's time to see the light.

WIRELESS COMMUNICATIONS

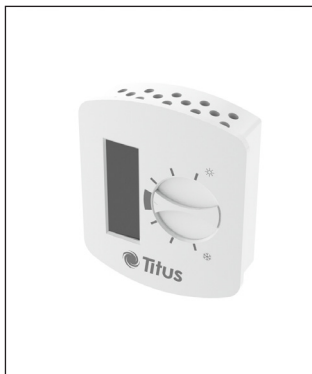

Wall Sensor



Postmaster



See website for Specifications




Helios VAV digital solar-powered diffuser installed in the ceiling of an office building

DIMENSIONS



HELIOS UNIT DIMENSIONS

Helios / Border Type 3 (Lay-in)

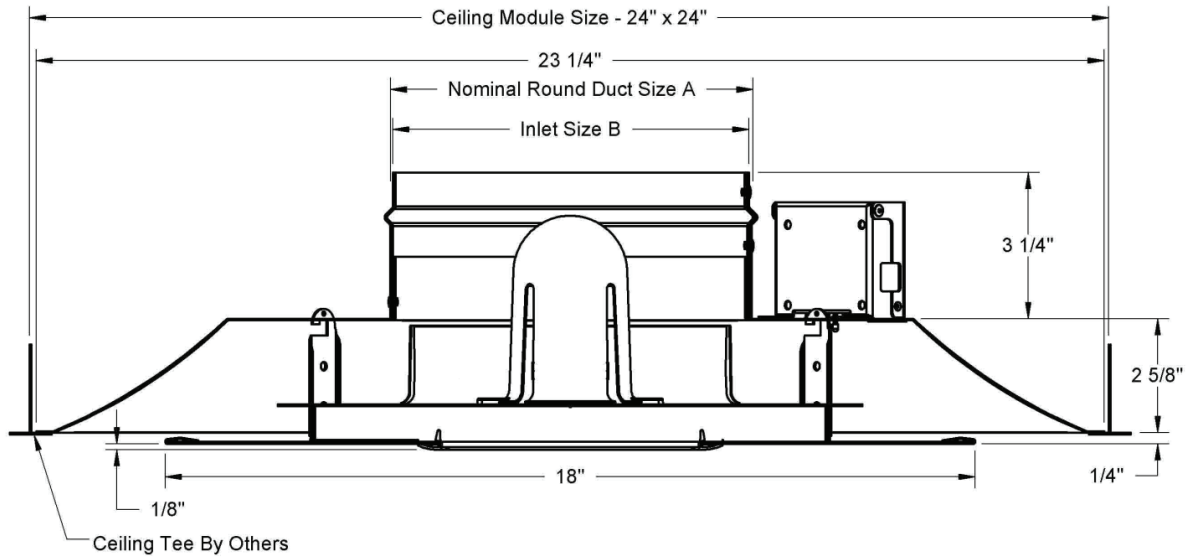

Ceiling Module A	Nominal Round Duct Size	Border Type
24 x 24	6, 8, 10, 12	3, NT
300MM x 300MM		3

WIRELESS COMMUNICATIONS

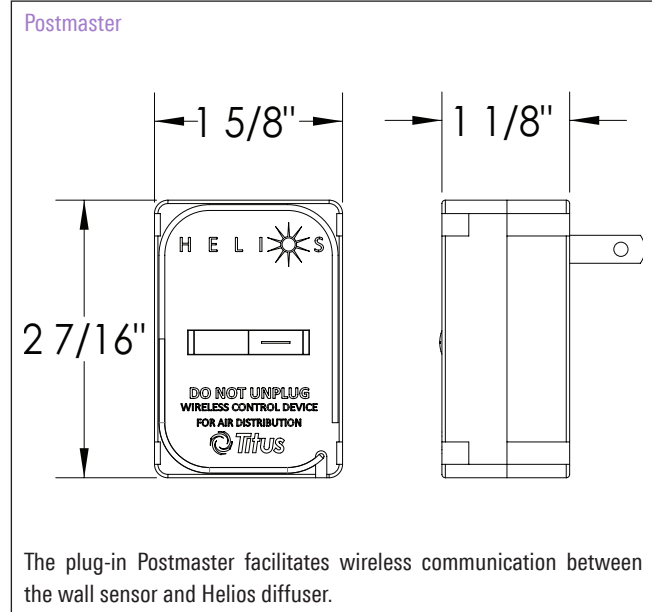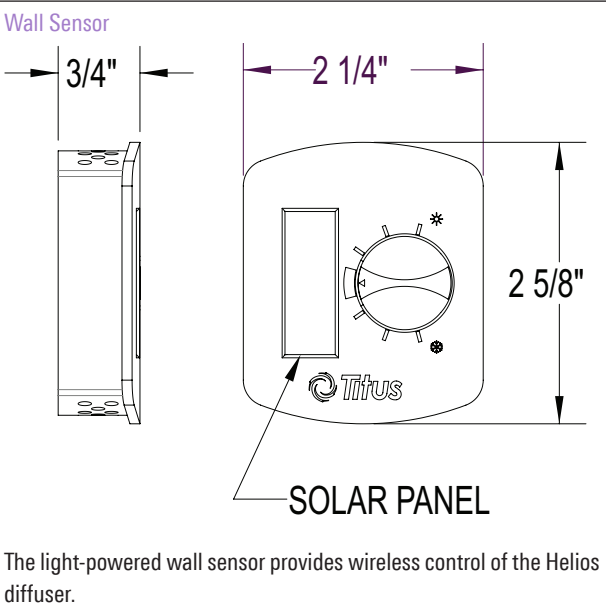


www.titus-hvac.com

DIMENSIONS

Overview


OTHER AVAILABLE BORDER TYPES

Helios / Border Type 3 (Lay-in)


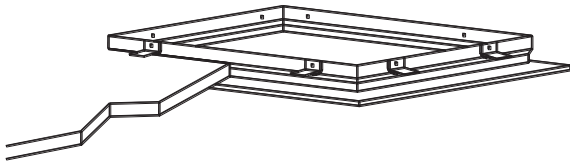


The Helios series of diffusers are not available with standard border type 1. For surface mounting applications, the TRM optional Rapid Mount frame can be used. Using border option TRM, the Helios series diffusers are shipped with border type 3 (lay-in). The TRM frame is shipped separate for field installation. Once the TRM is installed, the Helios diffuser simply lays into the frame. This option allows access into the ceiling after installation.

Helios / Border Type NT (Narrow Tee)

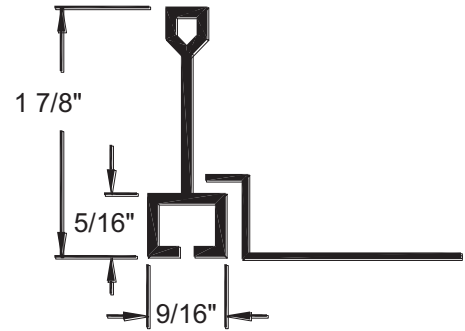

Helios / Border Type 3 (Lay-in)

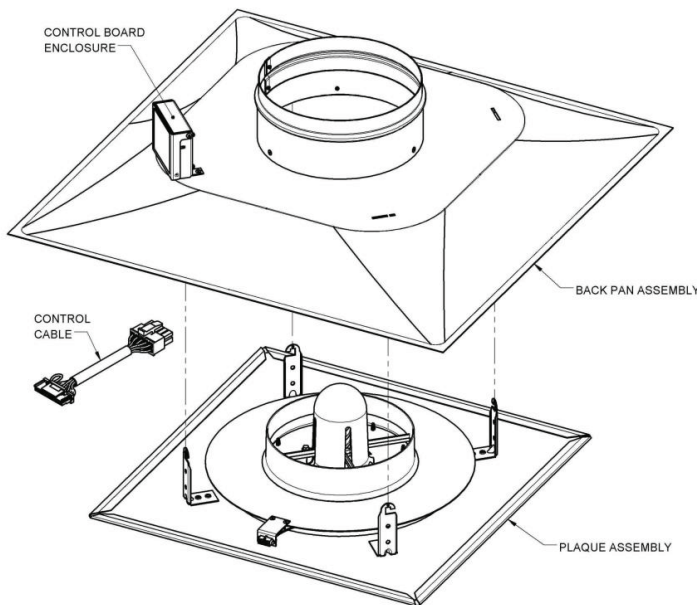

Installing Face Panel



1. Insert the hook brackets into the slots in the backpan.
2. Rotate the face panel clockwise until...
3. The hooks positively engage in the secondary slots in the backpan.

Removing Face Panel

1. Lift the faceplate towards the backpan to disengage the hook brackets from the backpan slots.
2. Rotate the faceplate counter-clockwise.
3. Lower the faceplate away from the backpan.

Adjusting Optional Damper

1. Remove face panel as above.
2. Use flat blade screwdriver to turn operator shaft at center of damper.
3. Replace face panel

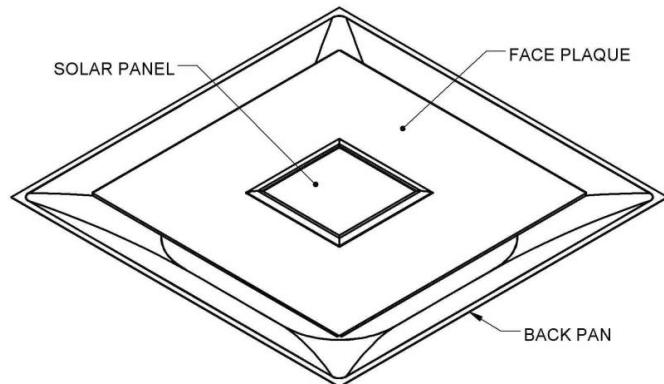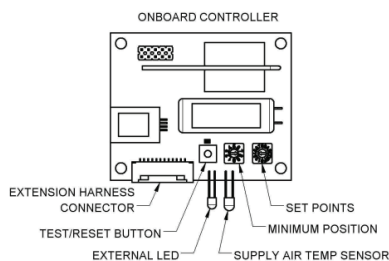

HELIOS MAXIMUM FLOW SELECTION

Inlet Size	Neck Velocity Velocity Pressure	400 0.010	500 0.016	600 0.022	700 0.031	800 0.040	900 0.050	1000 0.062
6"	Static pressure	0.022	0.034	0.049	0.066	0.086	0.11	0.134
	Total Pressure	0.032	0.50	0.071	0.097	0.126	0.16	0.196
	cfm	79	98	118	137	157	177	196
	NC	-	-	13	18	22	26	29
	Throw, ft	1-1-4	1-2-5	1-3-7	2-4-7	2-4-8	3-5-8	3-5-9
8"	Static pressure	0.024	0.038	0.054	0.074	0.097	0.122	0.151
	Total Pressure	0.034	0.054	0.076	0.105	0.137	0.172	0.213
	cfm	140	175	209	244	279	314	349
	NC	-	15	20	24	28	31	34
	Throw, ft	1-3-6	2-4-8	3-5-9	4-5-11	4-6-11	5-7-12	5-8-13
10"	Static pressure	0.038	0.059	0.085	0.116	0.152	0.192	0.237
	Total Pressure	0.048	0.075	0.107	0.147	0.192	0.242	0.299
	cfm	218	273	327	382	436	491	545
	NC	17	23	28	32	36	39	42
	Throw, ft	4-6-11	5-7-13	6-9-14	7-10-15	8-11-16	9-12-17	10-13-18
12"	Static pressure	0.062	0.097	0.14	0.191	0.249	0.315	0.389
	Total Pressure	0.072	0.113	0.162	0.222	0.289	0.365	0.451
	cfm	314	393	471	550	628	707	785
	NC	18	25	31	36	40	43	47
	Throw, ft	5-7-13	6-9-14	7-11-16	9-12-17	10-13-18	11-14-19	12-14-20

Notes:

- Throw values given are for terminal velocities of 150, 100 and 50 fpm, respectively at 20° F Cooling. See Engineering Guidelines section for additional information.
- Velocity pressures are calculated based on inlet duct velocities
- Noise Criteria (NC) is based on room sound attenuation of 10dB (per AHRI 885 Standard). NC values less than 15 are shown as "-".
- Data was obtained by tests conducted in accordance with standard ANSI/ASHRAE 70

HELIOS AHRI DATA

AHRI Directory of Certified Performance

AHRI Rating Data			Inlet Size	6" Inlet	8" Inlet	10" Inlet	12" Inlet		
Standard Ratings Sound Power Level, dB	3. Airflow, cfm			147	262	409	589		
	4. Min. Operating Pressure, in H ₂ O			0.076	0.085	0.134	0.219		
	5. Max. Inlet Static Pressure @ 400 fpm Neck Velocity, in H ₂ O			0.181	0.305	0.365	0.425		
	6. Rated with Pressure Relief, yes/no			n	n	n	n		
	Discharge	Standard Airflow Fully open damper 750 fpm Neck Velocity	Minimum Differential Static Pressure, in H ₂ O	Hz Octave Band Center Frequency	125	42	48	54	61
					250	37	43	50	56
					500	36	42	49	53
					1000	30	36	44	48
					2000	24	30	37	42
					4000	+	19	27	36
	Discharge	Standard Airflow Throttled Damper 400 fpm Neck Velocity	Max. Inlet Static Pressure, in H ₂ O	Hz Octave Band Center Frequency	125	40	46	53	60
					250	37	43	51	68
					500	37	42	48	58
					1000	32	39	45	53
2000					27	37	44	50	
4000					+	30	37	44	
Note: Sound Power levels below values shown in this table shall be listed as below significance.									
Hz Octave Band			125	250	500	1000	2000	4000	
Sound Power Level, dB			36	29	26	22	19	17	

Performance data is presented for the Helios diffuser with the internal VAV damper in full open position

NC	6" Inlet	8" Inlet	10" Inlet	12" Inlet
750 fpm	20	26	34	38
400 fpm**	21	28	35	48

** Damper throttled to achieve max inlet static pressure

Notes





Icons



contributes toward energy savings by reducing operating costs of air distribution devices

energy solutions



for use in retrofitting older products into modern designs & systems

retrofit



energy-harvesting & savings feature of an HVAC device powered by ambient light

light-powered



supplies both heating and cooling from one air device

dual-function

