
## INSTALLATION INSTRUCTIONS

- 1. CONSTRUCT FRAME WORK
  - BEFORE INSTALLING DRYWALL, A FRAMED OPENING MUST BE CONSTRUCTED TO SUPPORT DIFFUSER FRAME.
- 2. ATTACH MOUNTING CLIPS
  - MOUNTING CLIPS ARE SHIPPED LOOSE FOR FIELD ATTACHMENT TO DIFFUSER FRAME.
  - SLIDE MOUNTING CLIPS INTO BOSS OF EACH DIFFUSER FRAME RAIL
  - MOUNTING CLIPS SHOULD BE POSITIONED AT A MAXIMUM OF 10" INTERVALS ALONG THE DIFFUSER FRAME.
- 3. ATTACH DIFFUSER FRAME TO FRAMING
  - SET THE DIFFUSER FRAME INTO THE FRAMED OPENING AND SECURE THE MOUNTING CLIPS TO THE FRAMEWORK WITH FLATHEAD SCREWS.
- 4. INSTALL DRYWALL
  - SLIDE THE DRYWALL TIGHTLY BETWEEN THE MOUNTING CLIPS AND THE DIFFUSER FRAME FLANGE. FOR
    EASE OF INSTALLATION, INSERT THE TAPERED EDGE OF THE DRYWALL INTO THIS OPENING. FOR THE BEST
    FIT, SLIDE THE EDGE OF THE DRYWALL ALL THE WAY TO THE VERTICAL LEG OF THE DIFFUSER FRAME.
  - EVÉRY 12" AND BETWEEN THE MOUNTING CLIPS, ATTACH SCREWS JUST BESIDE THE DIFFUSER FRAME FLANGE. THROUGH THE DRYWALL. AND INTO THE FRAMING MEMBER.
- FINISH THE SURFACE.
  - CLEAN THE DIFFUSER FRAME FLANGE TO REMOVE ANY OILS OR RESIDUE.
  - APPLY A JOINT COMPOUND BONDING AGENT TO THE DIFFUSER FRAME FLANGE AND ALLOW TO DRY.
  - APPLY FIRST COAT OF JOINT COMPOUND ONTO THE DIFFUSER FRAME FLANGE AND ONTO DRYWALL THREE INCHES
  - EMBED A 4" WIDE MESH TAPE INTO THIS FIRST COAT. THE TAPE SHOULD COVER THE FLANGE, BUT NOT EXTEND OVER THE RAISED LIP OF THE RAIL.
  - APPLY A SECOND COAT OF JOINT COMPOUND OVER THE TAPE AND SMOOTH.
  - AFTER JOINT COMPOUND HAS DRIED, APPLY TWO COATS OF A STANDARD FINISHING COMPOUND AND LET DRY. SAND, SMOOTH, PRIME, AND PAINT AS SCHEDULED.

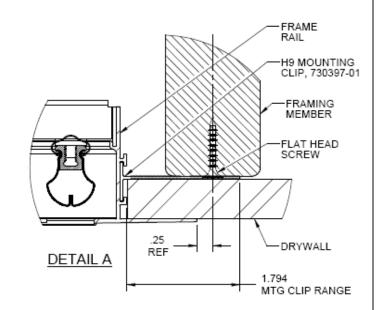



## NOMINAL DUCT SIZE

	HOMINAL BOOT CILL							
NO. OF	ML/MLR	ML/MLR	ML/MLR					
SLOTS	38	39	40	NOM DUCT SIZE PLUS 2.88  SEE SHEET 2 FOR CLIP				
1	1.63	1.88	2.38	ORIENTATION DETAIL				
2	3.13	3.63	4.63					
3	4.63	5.38	6.88	NOM DUCT SIZE				
4	6.13	7.13	9.13					
5	7.63	8.88	-					
6	9.13	10.63	-	☐ 1.181				
7	10.63	12.38	-					
8	12.13	14.13	-	FRAME ATTACHED TO				
				FRAMING MEMBER WITH MOUNTING CLIP				
DRYWALL SECURED TO FRAMING								
		MEN		DRYWALL INSERTED INTO CAVITY  A				
				.25 NOM DUCT SIZE PLUS 2.3825				

## **ML Border 22 Mounting Clip Quantities per length**

NOM Length (in.)	CLIPS PER SIDE	TOTAL CLIP QTY
12.00		
Ψ	2	4
14.94		
15.00		
₩	3	6
24.94		
25.00		
<b>V</b>	4	8
34.94		
35.00		
<b>V</b>	5	10
44.94		
45.00		
₩	6	12
54.94		
55.00		
<b>V</b>	7	14
64.94		
65.00		
<b>V</b>	8	16
72.00		

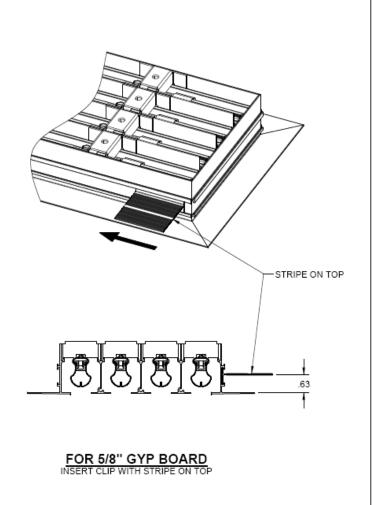

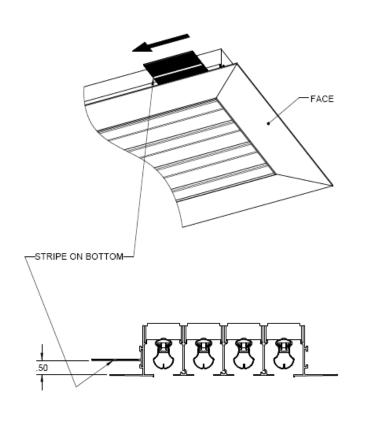

FOR 1/2" GYP BOARD INSERT CLIP WITH STRIPE ON BOTTOM