


## ESV (Steam Coil)

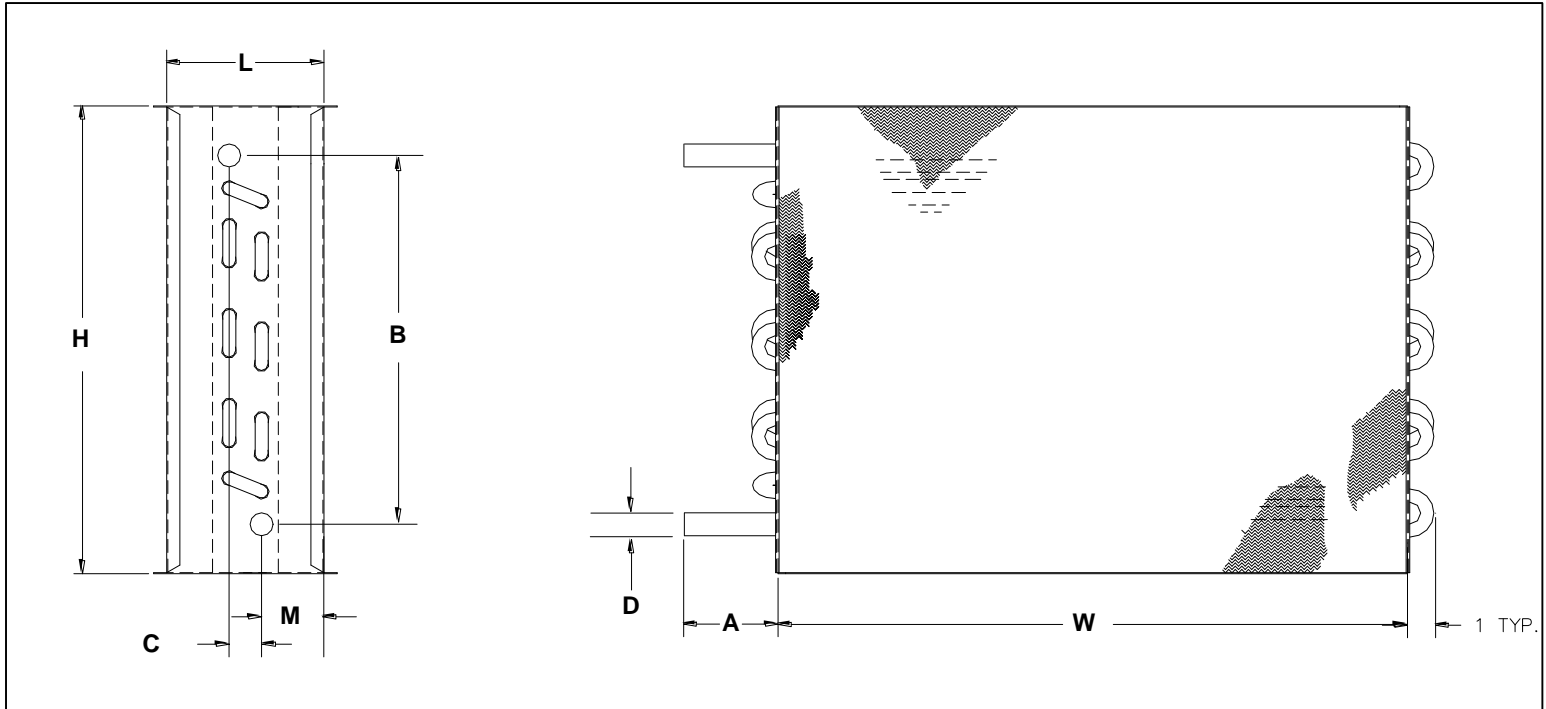

Unit Size	H	W	L	M	1 Row				2 Row			
					A	B	C	D	A	B	C	D
4,5,6	8	12	5	1 3/4	3	6 1/4	0	1/2	4 1/4	6 7/8	0	7/8
7,8	10	12	5	1 3/4	3	8 3/4	0	1/2	4 1/4	9	1 1/8	7/8
9,10	12 1/2	14	5	1 3/4	4 1/4	10 7/8	1 1/4	7/8	4 1/4	11 1/2	1 1/8	7/8
12	15	16	5	1 3/4	4 1/4	13 3/8	1 1/4	7/8	4 1/4	14	1 1/8	7/8
14	17 1/2	20	7 1/2	1 3/4	4 1/4	15 7/8	1 1/4	7/8	4 1/4	16 1/2	1 1/8	7/8
16	18	24	7 1/2	1 3/4	4 1/4	15 7/8	1 1/4	7/8	4 1/4	16 1/2	1 1/8	7/8
24 x 16	18	38	5	1 3/4	4 1/4	15 7/8	1 1/4	7/8	4 1/4	16 1/2	1 1/8	7/8

Unit Size	H	W	L	M	3 Row				4 Row			
					A	B	C	D	A	B	C	D
4,5,6	8	12	7 1/4	1 3/4	4 1/4	6 7/8	2 1/8	7/8	4 1/4	6 7/8	3 1/4	7/8
7,8	10	12	7 1/4	1 3/4	4 1/4	9	2 1/8	7/8	4 1/4	9	3 1/4	7/8
9,10	12 1/2	14	7 1/4	1 3/4	4 1/4	10 1/4	2 1/8	7/8	4 1/4	10 1/4	3 1/4	7/8
12	15	16	7 1/4	1 3/4	4 1/4	14	2 1/8	7/8	4 1/4	14	3 1/4	7/8
14	17 1/2	20	9 3/4	1 3/4	4 1/4	14	2 1/8	7/8	4 1/4	14	3 1/4	7/8
16	18	24	9 3/4	1 3/4	4 1/4	14	2 1/8	7/8	4 1/4	14	3 1/4	7/8
24 x 16	18	38	7 1/4	1 3/4	4 1/4	14	2 1/8	7/8	4 1/4	14	3 1/4	7/8

### General Description

- Coil connections have single circuit 1/2 inch O.D. copper tubes, 0.025 thick wall male solder.
- Multi-Circuit connections have 7/8 inch O.D. copper tubes, 0.025 thick wall male solder.
- Aluminum plate fins, 10 per inch.
- Casing is 20 Gauge galvanized steel.
- Copper male solder connections.
- Connection is slip and drive to duct work down stream of terminal.
- Leak tested to 450 PSIG.
- Maximum working pressure, 360 PSIG
- Maximum 300 degree F steam (low pressure 15 psi)