


## TQS

- Consistent, quiet design
- Two casings for easy design layout
- Built-in sound baffle for low sound levels, both radiated and discharge
- Pressure independent primary airflow control
- AeroCross™ multi-point inlet velocity sensor with center averaging
- Energy-efficient fan motor, permanent split capacitor type, mounted with vibration isolators
- Optional ultra-high efficiency ECM brushless DC motor available
- Adjustable SCR fan speed control with minimum voltage stop
- Single point electrical, pneumatic main, and thermostat connections
- Solid metal liner
- 20-gauge galvanized steel casing
- Rectangular discharge opening is designed for flanged duct connections

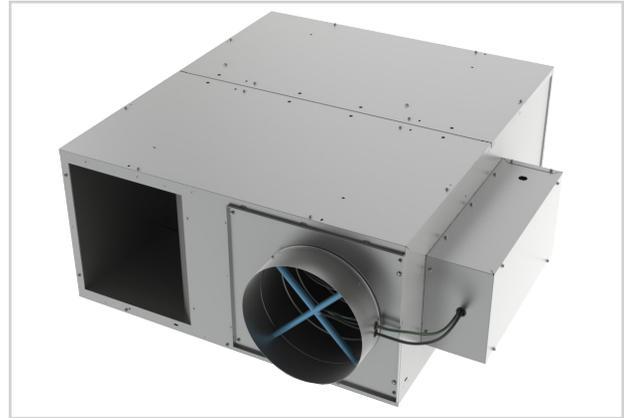

TQS

- Bottom access panel can be removed for service
- No external sound attenuators are required



energy solutions

### MODELS:

PTQS / Pneumatic Control  
ATQS / Analog Control  
DTQS / Digital Control

### OVERVIEW

Quiet Operation / TQS with UltraLoc Liner™ / TQS with UltraLoc Liner™ and ECM Motor

Designers choose Series flow terminals for their characteristics of constant air delivery and temperature blending. Nevertheless, these terminals maintain the VAV energy savings at the central fan.



See website for Specifications