


### MDV / MDC

- Standard AeroCross™ multi-point center averaging velocity sensors in multiple location combinations to match any control requirement
- Standard matte faced insulation for maximum thermal and acoustic performance
- Mechanically sealed and gasketed, leak resistant construction
- High performance mixing section
- Choice of right or left hand cold duct location; right hand is standard
- Standard 22 gauge casing with slip and drive discharge connection
- Controls supplied by Titus are factory calibrated for quicker start-up



MDV

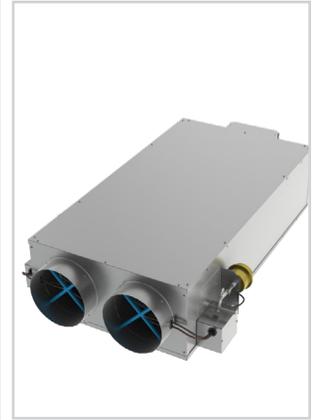

MDC

### MODELS:

- PMDV / Pneumatic
- PMDC / Pneumatic
- DMDV / Digital Electronic



See website for Specifications

### OVERVIEW

Titus Dual Duct terminals vary the airflow individually between hot and cold inlets for highly accurate temperature control. Dual duct systems are an ideal vehicle for alternative ventilation strategies and humidity control. Additionally, total filtration of all air delivered to the zone is possible. Titus dual duct terminals provide high performance and value, making them the preferred selection for these applications.

### ADDITIONAL FEATURES

- Direct digital control package supplied by Titus includes: direct digital controller, damper actuators and flow transducers
- Dual density insulation, coated to prevent air erosion, meet requirements of NFPA 90A and UL 181