


TBHD & TBVD Blow Thru Electric Heat

Model TBHD/TBVD Direct Drive Blower Coil Unit Blow-Thru Electric Heat

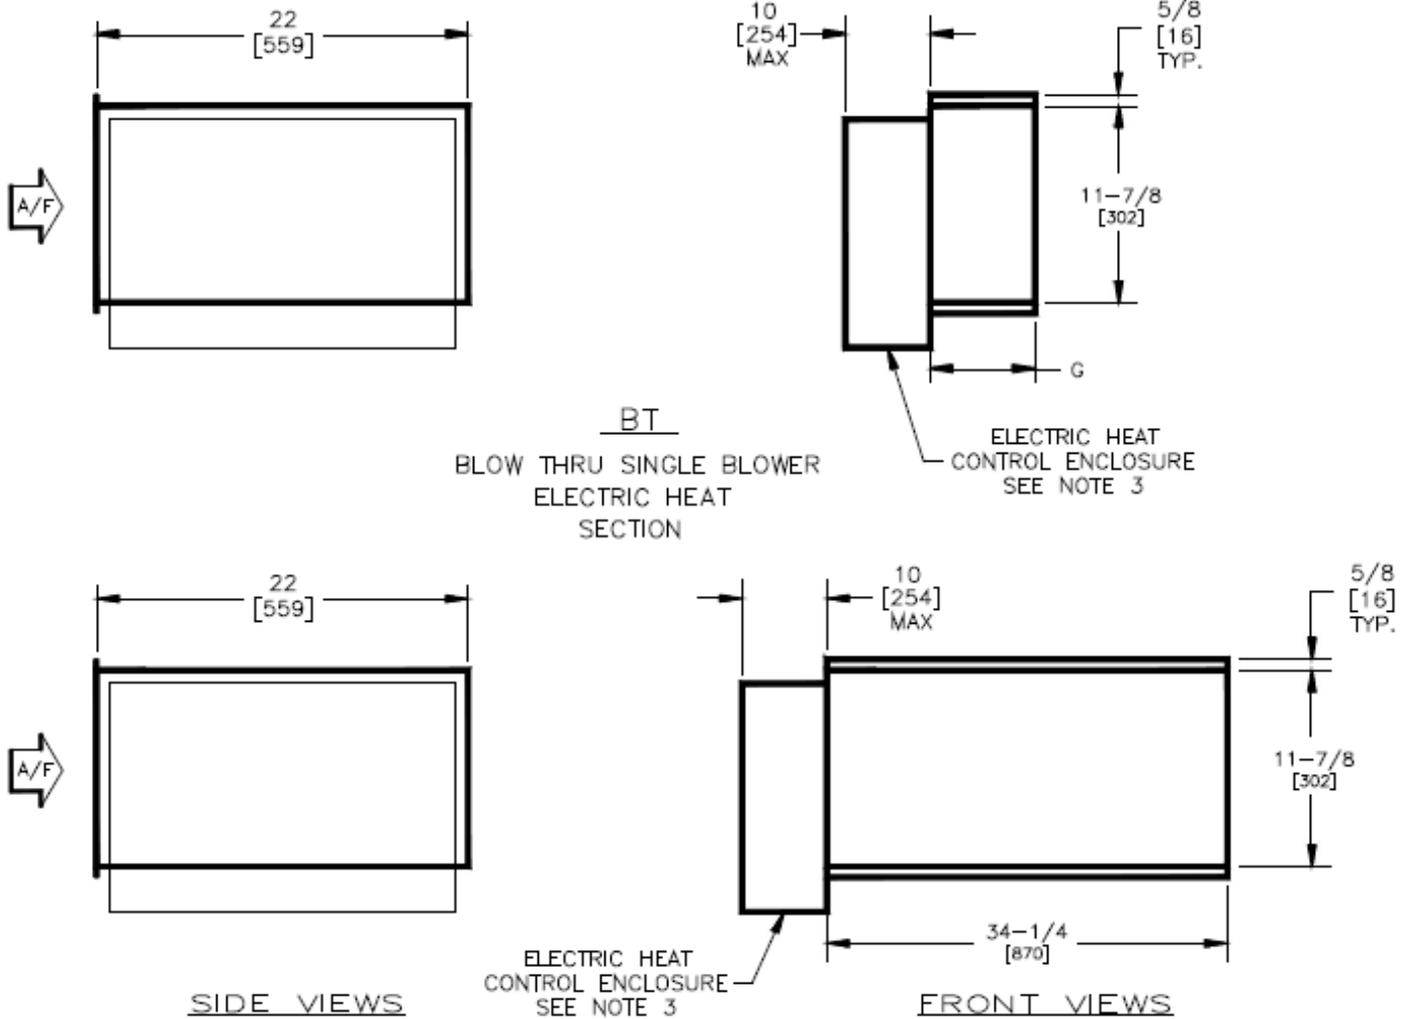

SIZES

UNIT SIZES	Weight lbs [KG.]		G
	SINGLE BLOWER	DUAL BLOWER	
08	45 [20]	-	8-3/4 [222]
12	45 [20]	-	8-3/4 [222]
16	45 [20]	-	10-3/4 [273]
20	45 [20]	-	10-3/4 [273]
30	45 [20]	100 [45]	10-3/4 [273]
40	45 [20]	140 [64]	10-3/4 [273]

NOTES:

- All dimensions are Inches [millimeters]. All dimensions are $\pm 1/4"$ [6mm]. Metric Values are soft conversion.
- Motor/drive location may be specified Left or Right Hand. Standard control enclosure location matches motor/drive position.
- Provide sufficient clearance to permit access to controls and comply with applicable codes and ordinances.
- Available for horizontal discharge only.
- For units configured with an uninsulated blow-thru heat section: to prevent sweating, ensure that insulation is field-installed prior to cooling mode operation.

New	08/04/22	SP	New Release
Revision Date	Version Date	Initiated By	Description