



- 300RL-HD** • Double Deflection • Long Front Blades with 1/2" Blade Spacing • Short Rear Blades with 3/4" Spacing
- 300RS-HD** • Double Deflection • Short Front Blades with 1/2" Blade Spacing • Long Rear Blades with 3/4" Spacing


**Heavy Duty Louvered Supply Grilles • Steel**

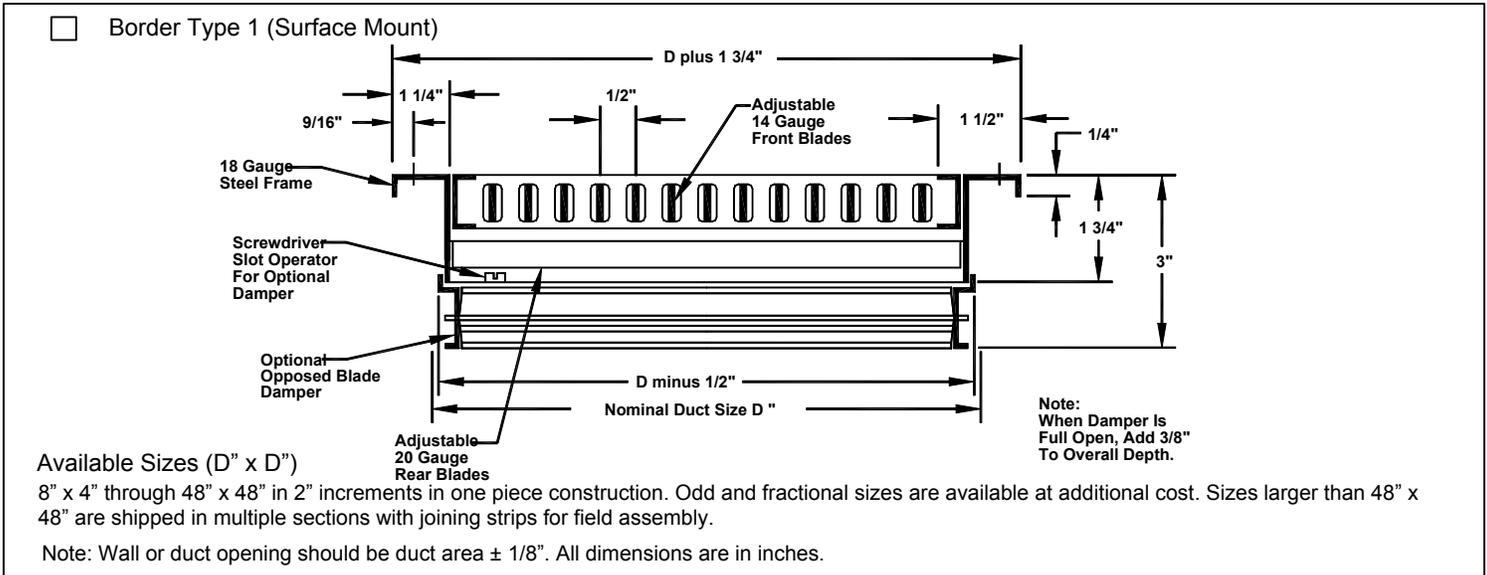

**Fastenings**

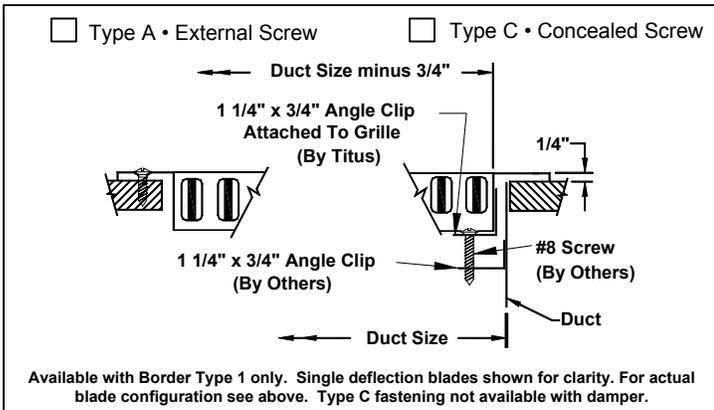

**Mounting Frames**

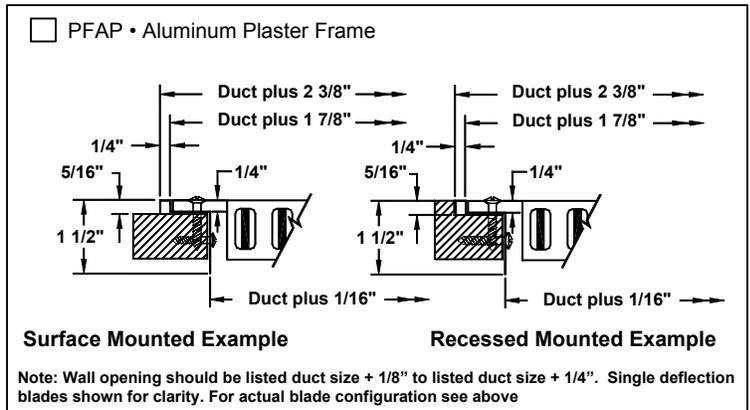

- Accessories (Optional)**      Check  if provided.
- Neck mounted opposed blade damper (galvanized steel)       Other: \_\_\_\_\_
  - EQT • Earthquake Tabs

Standard Finish: #26 White

Other Finish: \_\_\_\_\_

**General Description**

- 14 gauge front blades individually adjustable, 0° - 40° deflection.
- #8 x 1 1/4" lg. Phillip's flat head sheet metal screws painted white.
- Optional opposed blade damper has screwdriver adjustment accessible through face of grille.
- Material: Steel.
- All dimensions are ± 1/16".