


HBR

Fan Coil Unit

Horizontal Basic Recessed Cabinet

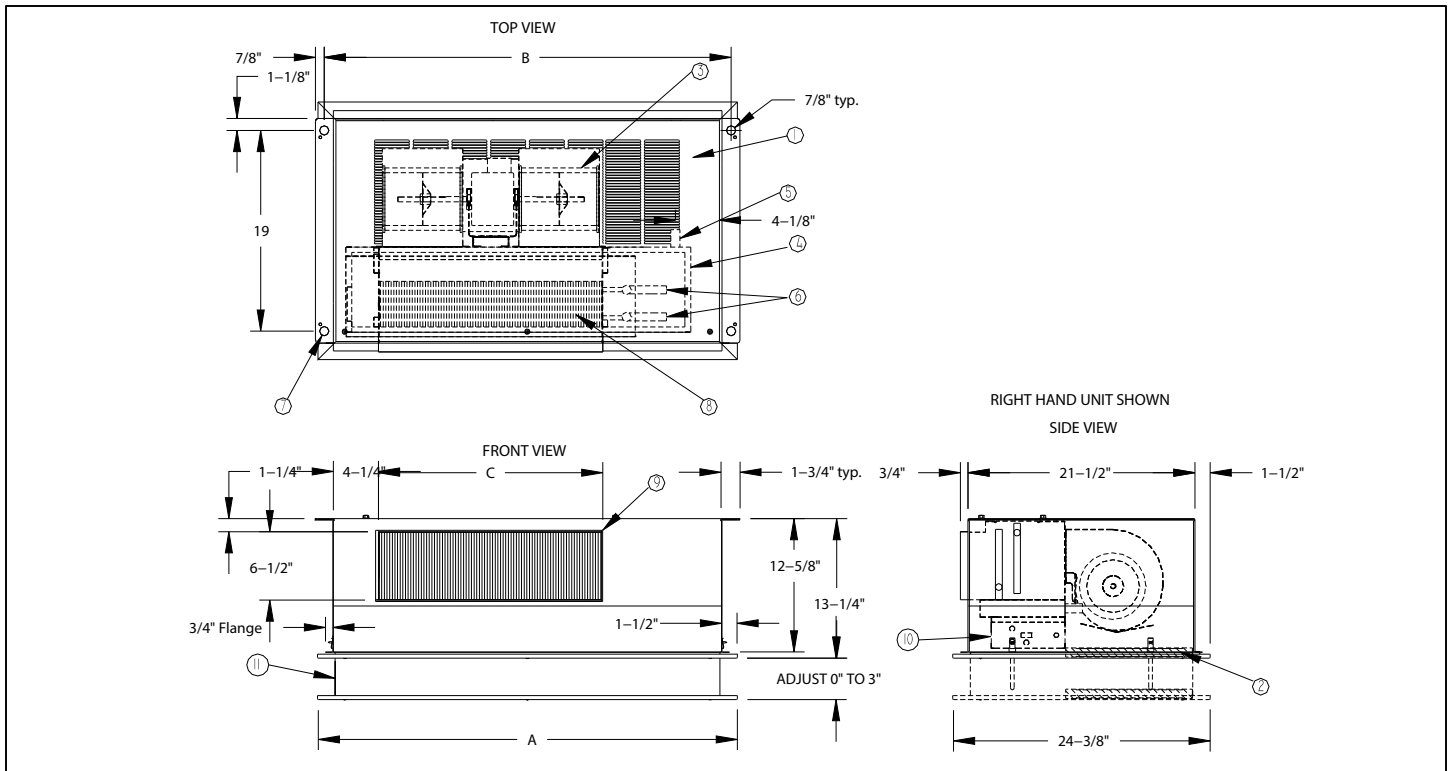

Model	Dimensions (inches)					Approx. Weight (lb)
	A	B	C	D	Filter	
HBR02	32 5/8	31 1/2	14 1/4	5/8	24x12x1	100
HBR03	35 5/8	34 1/2	17 1/4	5/8	28x12x1	115
HBR04	41 5/8	40 1/2	23 1/4	5/8	28x12x1	130
HBR06	50 5/8	49 1/2	32 1/4	5/8	42x12x1	145
HBR08	58 5/8	57 1/2	40 1/4	5/8	50x12x1	170
HBR10	68 5/8	67 1/2	50 1/4	7/8	(2)30x12x1	200
HBR12	78 5/8	77 1/2	60 1/4	7/8	(2)34x12x1	225

1. Return air grille (bottom return shown)
2. Filter
3. Blower / motor assembly
4. Condensate pan
5. Drain connection - 3/4" MNPT
6. Chilled water connections (supply and return)
O.D. = 'D'; Hot water connections = 5/8" O.D.
7. Mounting holes with rubber grommets
8. Coil assembly
9. Supply air duct collar
10. Control/Electrical box
11. Telescoping return air frame

Accessories (Optional)

Check if provided.

- Thermostat _____
- Control Transformer & Fan Relays
- Aquastat Changeover Switch

- Washable Filter
- Unit Disconnect Switch
- Fuse
- Special Color _____ (specify)

Accessories (Optional)

Coil - 3/8" O.D. Copper Tube; 10 Fins/Inch Aluminum, Sine Wave

2-Pipe

- 2-Row
 3-Row
 4-Row
 5-Row

4-Pipe (Cooling Rows/Heating Rows)

- 2/1-Row
 3/1-Row
 3/2-Row
 4/1-Row

- Chilled Water Cooling
 Hot Water Heating
 Glycol Cooling
 Glycol Heating

Motor(s) - 3 speed PSC

Standard
115V/60Hz/1ph

Optional:

- 208V/60Hz/1ph.
 230V/60Hz/1ph
 277V/60Hz/1ph

Model	HP	Total Amps
HBR02	1/20	0.8
HBR03	1/20	0.8
HBR04	1/20	0.8
HBR06	1/10	1.5
HBR08	1/10	1.5
HBR10	2 x 1/10	2 x 1.5
HBR12	2 x 1/10	2 x 1.5

Features:

- Automatic Reset
- Thermal Overload Protection System

Electric Heat (Single Phase)

Heater Voltage

- 115V
 208V
 230V
 277V

		Electric Heater kW Primary or Supplementary			
		115 Volts	208 Volts	230 Volts	277 Volts
Size	Blowers	Min-Max kW	Min-Max kW	Min-Max kW	Min-Max kW
02	1	1-2 kW	1-2 kW	1-2 kW	1-2 kW
03	1	1-3 kW	1-3 kW	1-3 kW	1-3 kW
04	2	1-4 kW	1-4 kW	1-4 kW	1-4 kW
06	2	1-4 kW	1-6 kW	1-6 kW	1-6 kW
08	2	1-4 kW	1-8 kW	1-8 kW	1-8 kW
10	4	2-4 kW	2-9 kW	2-10 kW	2-10 kW
12	4	2-4 kW	2-9 kW	2-10 kW	2-12 kW

Pan <input type="checkbox"/> Galvanized (STD.) <input type="checkbox"/> Safety Overflow Float Switch* <input type="checkbox"/> Safety (Two) Drain Connection <input type="checkbox"/> Extension Plate <input type="checkbox"/> Mastic Coating <input type="checkbox"/> Stainless Steel Inner Layer		Description: Inner and Outer Layer of 18 gauge Galvanized Sheet Metal with One - Inch Internal Insulation
*24V, requires transformer and fan relay if not obtained with a 24V thermostat.		

Valves and Valve Accessories <input type="checkbox"/> Shut - Off Valve(s) <input type="checkbox"/> Strainer(s) <input type="checkbox"/> Shut - Off Valve w/ Memory Stop <input type="checkbox"/> Manual Flow Control Valve(s) <input type="checkbox"/> 2 - Way Motorized Valve <input type="checkbox"/> Automatic Flow Control Valve(s) <input type="checkbox"/> 3 - Way Motorized Valve <input type="checkbox"/> Unions <input type="checkbox"/> 2 - Way Modulating Valve <input type="checkbox"/> Pete's Plug(s)	
--	--

General Description

- This horizontal discharge, attractively styled, cabinet unit is ideally suited for over-ceiling applications. The telescopic bottom frame with a full 3 inch vertical adjustment and hinged panel fits any ceiling type.
- Hinged bottom panel fabricated of 18 gauge galvanealed steel with Rock Beige or White powder-coated paint. Cabinet is 18 gauge galvanized sheet metal lined with 1/2" matte-faced liner for maximum thermal and acoustical insulation.
- Removable motor/blower assembly.
- Throwaway filter.
- Manual Air Vent.
- System charged with air to insure a leak free arrival at the job site.

This submittal is meant to demonstrate general dimensions of this product. The drawings are not meant to detail every aspect of the product. Drawings are not to scale. Titus reserves the right to make changes without written notice.



605 Shiloh Road • Plano, Texas 75074 • 972-212-4800