


FLS Hot Water Reheat

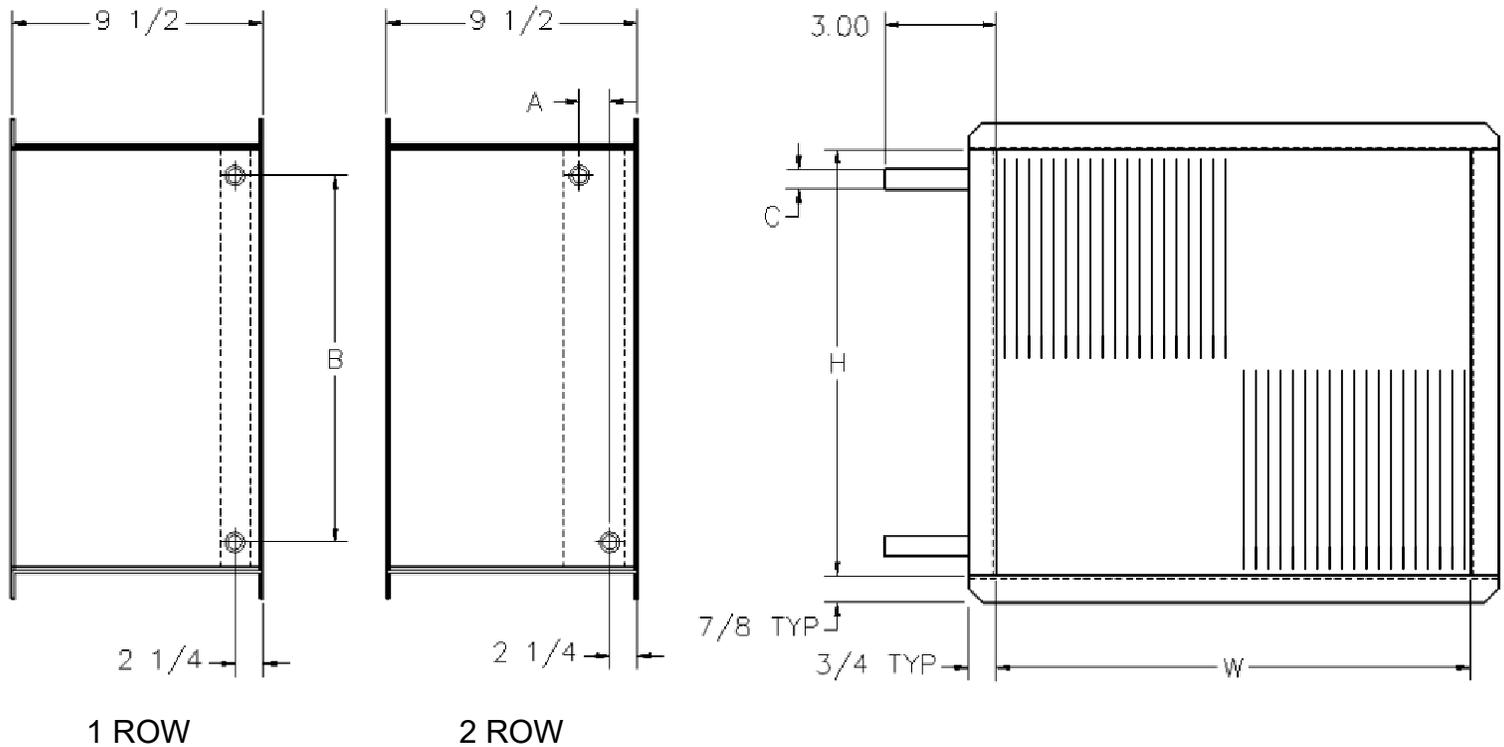

FLS Size	H	W	1 Row			2 Row		
			A	B	C	A	B	C
2 - 3	8 3/4	21	-	6 1/4	1/2	1/2	7 1/4	5/8
4	8 3/4	28	-	6 1/4	1/2	1/2	7 1/4	5/8

General Description

- Coils have 1/2 inch O.D. copper tubes, 0.016 thick wall.
- Aluminum plate fins, 10 per inch.
- Casing is 20 Gauge galvanized steel.
- Copper male solder connections.
- Flanged duct connection.
- Leak tested to 300 PSIG.
- Maximum working pressure, 240 PSIG
- Maximum 200 degree F water

Unit Size	1 Row		2 Row	
	Water Weight (lbs)	Water Volume (gal)	Water Weight (lbs)	Water Volume (gal)
2,3	0.91	0.11	1.79	0.21
4	1.17	0.14	2.27	0.27

Note: For additional rows, add difference between the 1 and 2 rows coil capacity.
8.34 LBS / gallon of water