


TQP - TQS Hot Water Reheat

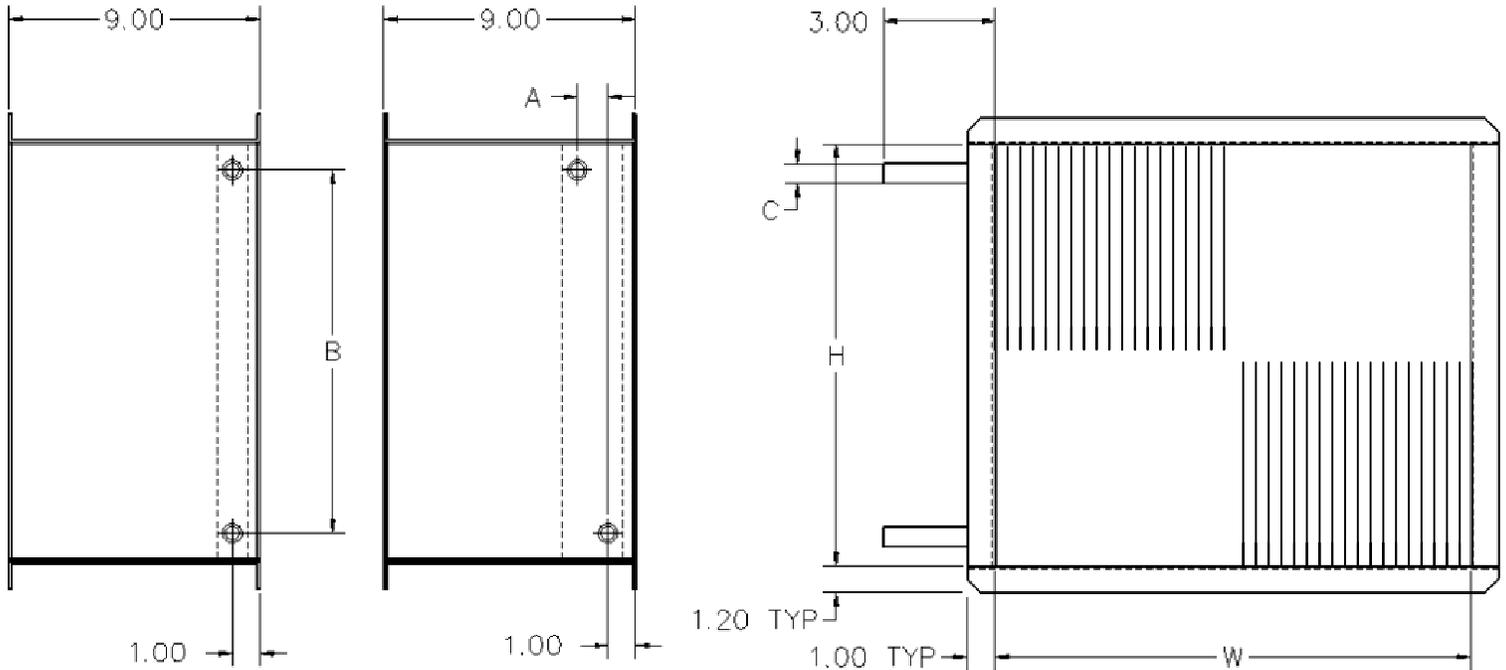

1 ROW

2, 3, 4 ROW

TQP Size	H	W	1 Row			2 Row		
			A	B	C	A	B	C
2 - 3 - 4	15	17	-	13 3/4	5/8	1	13 3/4	5/8
5 - 6	17 1/2	25	-	16 1/4	5/8	-	16 1/4	5/8

TQP Size	H	W	3 Row			4 Row		
			A	B	C	A	B	C
2 - 3 - 4	15	17	2 3/16	14 1/4	7/8	3 1/4	14 1/4	7/8
5 - 6	17 1/2	25	2 3/16	16	7/8	3 1/4	16 3/4	7/8

TQS Size	H	W	1 Row			2 Row		
			A	B	C	A	B	C
2 - 3 - 4	15	17	-	13 3/4	5/8	1	13 3/4	5/8
5 - 6 - 7	17 1/2	25	-	16 1/4	5/8	-	16 1/4	5/8

TQS Size	H	W	3 Row			4 Row		
			A	B	C	A	B	C
2 - 3 - 4	15	17	2 3/16	14 1/4	7/8	3 1/4	14 1/4	7/8
5 - 6 - 7	17 1/2	25	2 3/16	16	7/8	3 1/4	16 3/4	7/8

General Description

- Coils have 1/2 inch O.D. copper tubes, 0.016 thick wall.
- Aluminum plate fins, 10 per inch.
- Casing is 20 Gauge galvanized steel.
- Copper male solder connections.
- Flanged duct connection.
- Leak tested to 300 PSIG.
- Maximum working pressure, 240 PSIG
- Maximum 200 degree F water

Unit Size	1 Row		2 Row	
	Water Weight (lbs)	Water Volume (gal)	Water Weight (lbs)	Water Volume (gal)
2,3,4	1.6	0.19	2.9	0.35
5,6,7	2.6	0.31	4.7	0.56

Note: For additional rows, add difference between the 1 and 2 rows coil capacity.
8.34 LBS / gallon of water