


# Terminal Units

## Single Duct • Accessories

Multi-Outlet Plenums for TITUS Models:  
PESV, EESV, AESV, DESV

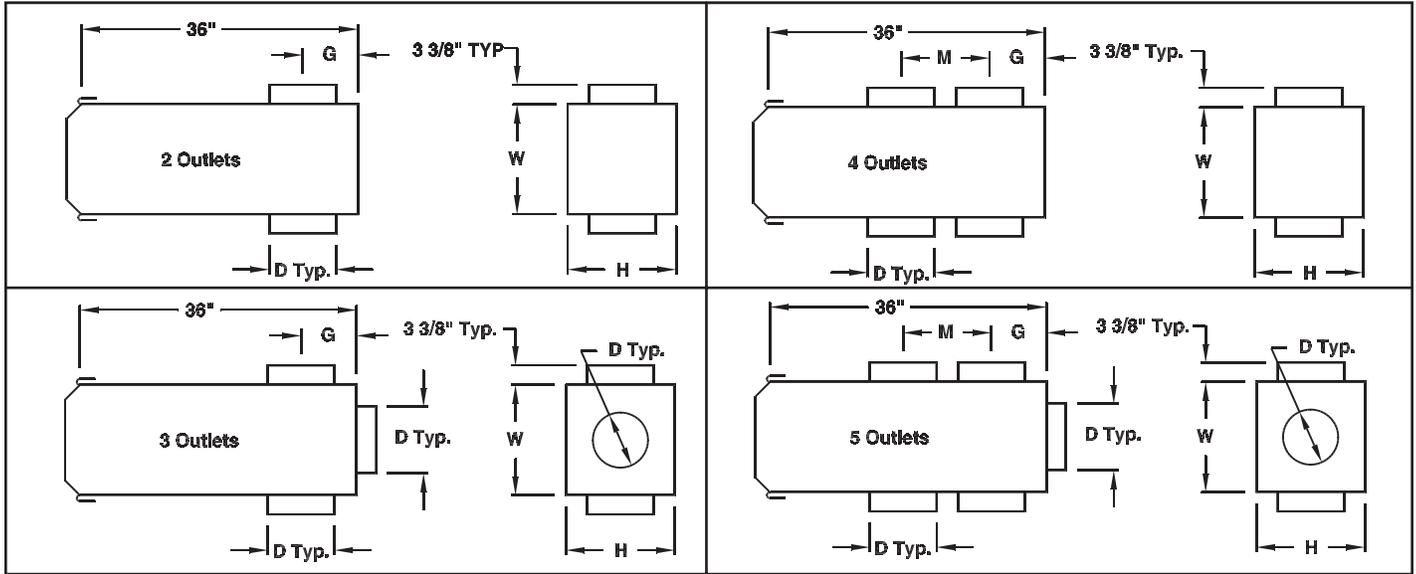

ESV Unit Size	D	2 Outlets		3 Outlets		4 Outlets		5 Outlets		H	W
		G	M	G	M	G	M	G	M		
4,5,6	5 7/8	7 1/2	—	7 1/2	—	—	—	—	—	8	12
7,8	7 7/8	7 1/2	—	7 1/2	—	7 1/2	14	—	—	10	12
8	7 7/8	—	—	—	—	—	—	7 1/2	14	10	12
9,10	9 7/8	7 1/2	—	7 1/2	—	7 1/2	14	—	—	12 1/2	14
9,10	7 7/8	7 1/2	—	7 1/2	—	7 1/2	14	—	—	12 1/2	14
12	11 7/8	7 1/2	—	7 1/2	—	—	—	—	—	15	16
12	9 7/8	—	—	7 1/2	—	7 1/2	14	7 1/2	14	15	16
14	11 7/8	7 1/2	—	7 1/2	—	—	—	—	—	17 1/2	20
14	9 7/8	—	—	7 1/2	—	7 1/2	14	7 1/2	14	17 1/2	20
16	11 7/8	7 1/2	—	7 1/2	—	—	—	—	—	18	24
16	9 7/8	—	—	7 1/2	—	7 1/2	14	7 1/2	14	18	24

All dimensions are in inches.

## Accessories (Optional)

Check  if provided.

1" Insulation.

Steri-Loc™ Liner.

Micro-Loc™ Liner.

Fibre Free Liner.

\_\_\_\_\_

## General Description

---

- Each outlet tap includes a manually operated balancing damper with locking handle.
- Rectangular inlet is designed for slip-and-drive cleat duct connection.

- Heavy gauge steel housing. Mechanically sealed and gasketed, leak resistant construction. Less than 2% of nominal cfm at 1.5" sp W.G.

- Dual density internal insulation, coated to resist air erosion. Meets requirements of NFPA 90A and UL 181.



Note: This submittal is meant to demonstrate general dimensions of this product. The drawings on this submittal are not meant to detail every aspect of the product with exactness. Drawings are not to scale. TITUS reserves the right to make changes without written notice.  
605 Shiloh Road • Plano, Texas 75074 • 972-212-4800

TA-2.0-S