





Perforated Ceiling Diffusers Aluminum • Flush Face


Model: PAR-AA • Return

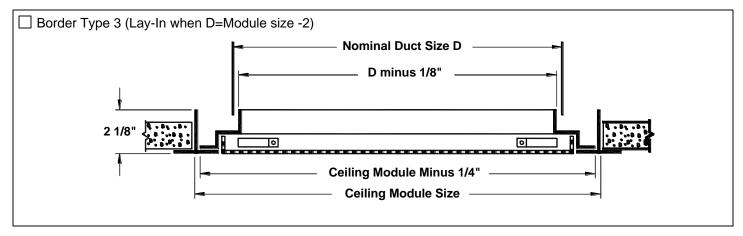


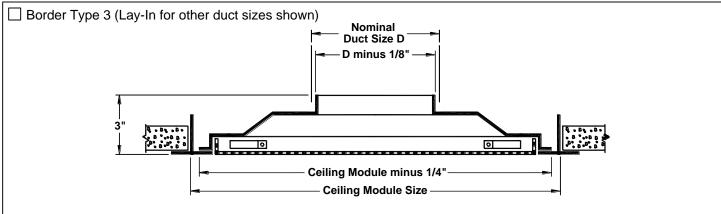





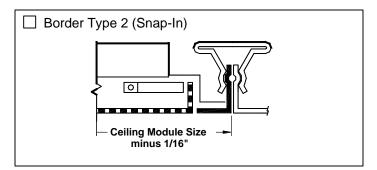


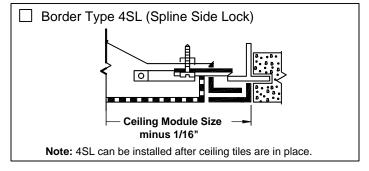


Available Sizes for Border Types 1, 2, 3, 4, 4SL														
Face or	Nominal Duct Size D													
Ceiling Module	6 x 6	8 x 8	10 x 10	12 x 12	15 x 15	18 x 18	22 x 22	22 x 10	6" Dia.	8" Dia.	10" Dia.	12" Dia.	14" Dia.	16" Dia.
12 x 12	•					•			•					
24 x 12								•						
24 x 24	•	•	•	•	•	•	•	•	•	•	•	•	•	•

[•] Indicates available combination.

Removing Perforated Face



2. Repeat on opposite side.





3. Face will now swing down with 2 remaining latches acting as hinges.


For complete removal, release 2 remaining latches at left.



Accessories (Optional) Check of if provided.



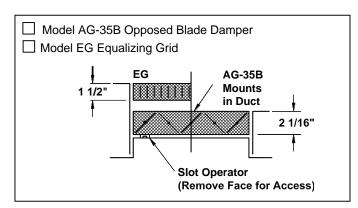

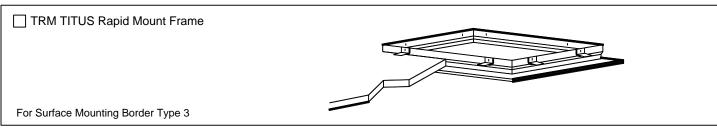





Insulation is R-6 where blanket has the most depth. One-inch clearance on each side of neck is left for insulated duct connection. 24 x 24-inch module size only. Blanket is factory installed.

Standard Finish: #26 White

General Description -

- Model PAR-AA flush face perforated ceiling diffusers are designed for use as returns to match the Model PAS supply diffusers.
- Can be mounted in a plenum or connected to a return duct.
- Optional damper is easily adjusted by dropping the perforated face (see above).
- Perforated face has 3/16" diameter holes on ½" staggered centers.
- Material is heavy gauge aluminum face, steel backpan and pattern controllers.