



Plenum Slot Diffuser Return • With Light Shield

Model: TBR-30 • 1, 2, 3 or 4 Slots

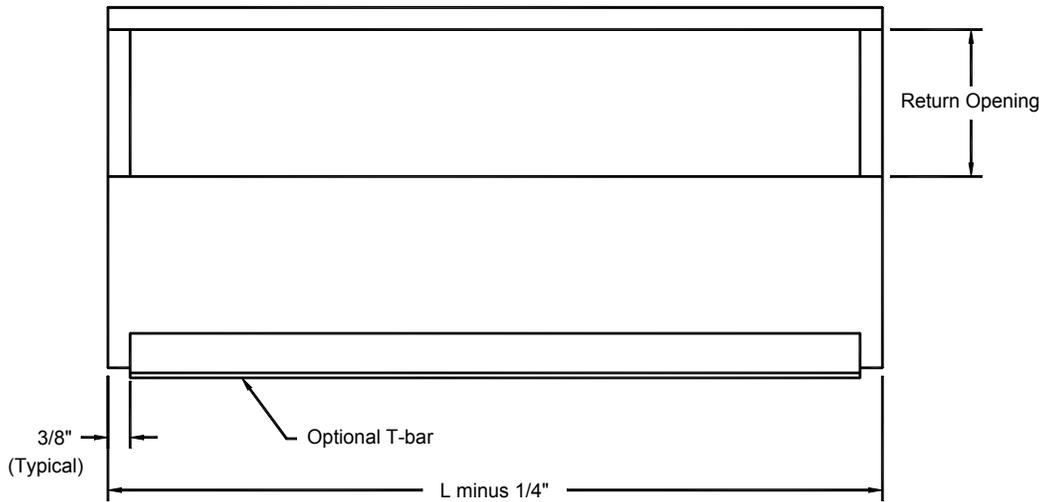

Standard Lengths L: 24, 36, 48, and 60 inches.

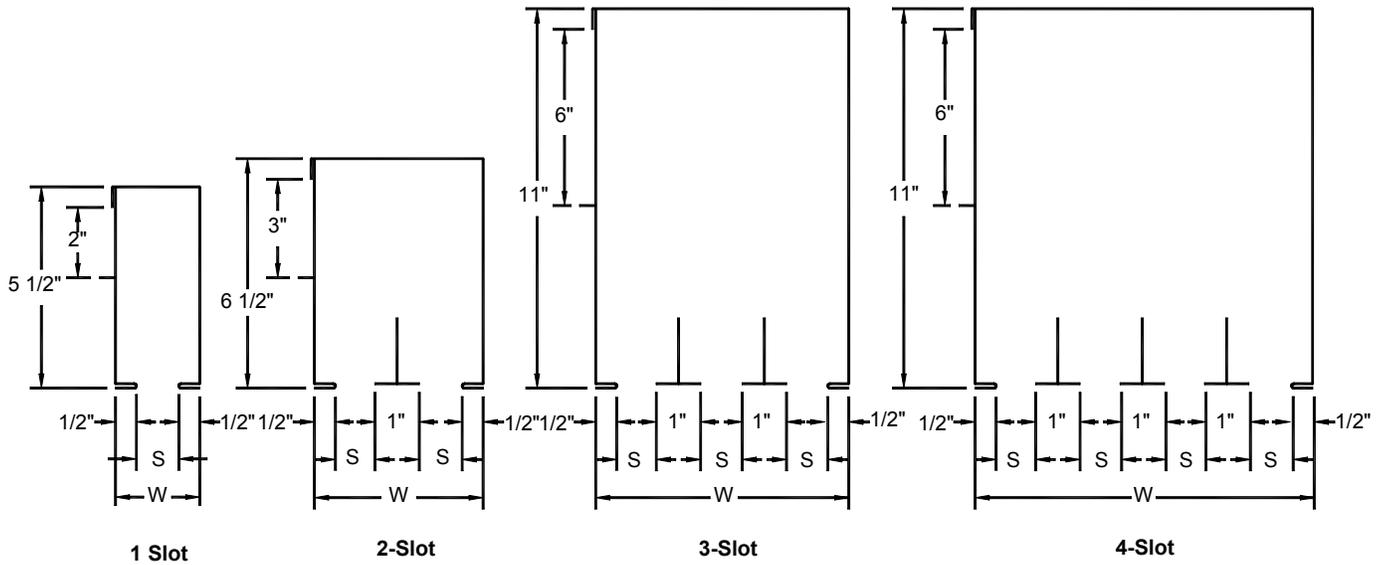


S Slot Width	W (Width)			
	1 Slot	2 Slot	3 Slot	4 Slot
3/4	1 3/4	3 1/2	5 1/4	7
1	2	4	6	8

Center T-bars
shown above
are optional

Accessories (Optional)

Check if provided



Optional Factory-Furnished T-Bars

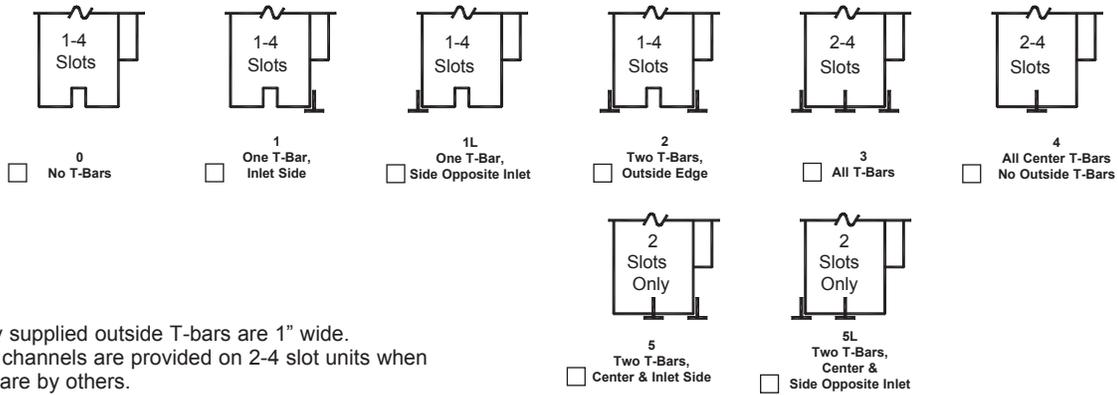

Note: Factory supplied outside T-bars are 1" wide. Center channels are provided on 2-4 slot units when T-bars are by others.

Optional Slot Diffuser Plaster Frame


PF-TBD

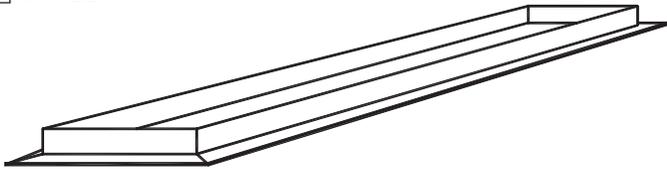

The PF-TBD slot diffuser mounting frame can be used in sheetrock or plaster ceiling. The frame is mounted in the ceiling by others. The TBR-30 is mounted on the inside lip of the frame. Plaster frame is 1 1/2" high.


Optional Mounting Clips

- MTC-1 (One side)
- MTC-2 (Both sides)

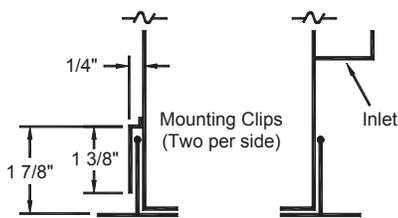

Optional Cross Notch

CN

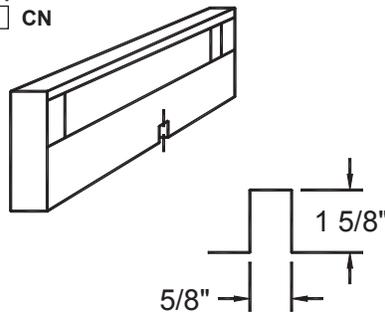

Standard Finish:

#02 Black exposed surfaces, black pattern controller, white optional tees.

General Description

- The Model TBD-30 is designed to return air into the ceiling plenum. Unit includes light shield.
- Outside edge of face has double metal thickness to ensure rigidity and straightness.

- TBR-30 return units are compatible with the TBD-30 series of supply plenum slot diffusers.
- Standard unit for T-bar lay-in. Available for other ceiling systems. Contact your local TITUS Representative.

- Unit available with 3/4 and 1 slots.
- Number of slots available: 1, 2, 3 and 4.
- Standard lengths: 24", 36", 48" and 60".
- Material is steel.



Note: This submittal is meant to demonstrate general dimensions of this product. The drawings on this submittal are not meant to detail every aspect of the product with exactness. Drawings are not to scale. TITUS reserves the right to make changes without written notice.

605 Shiloh Road • Plano, Texas 75074 • 972-212-4800

PSL-4.0-S