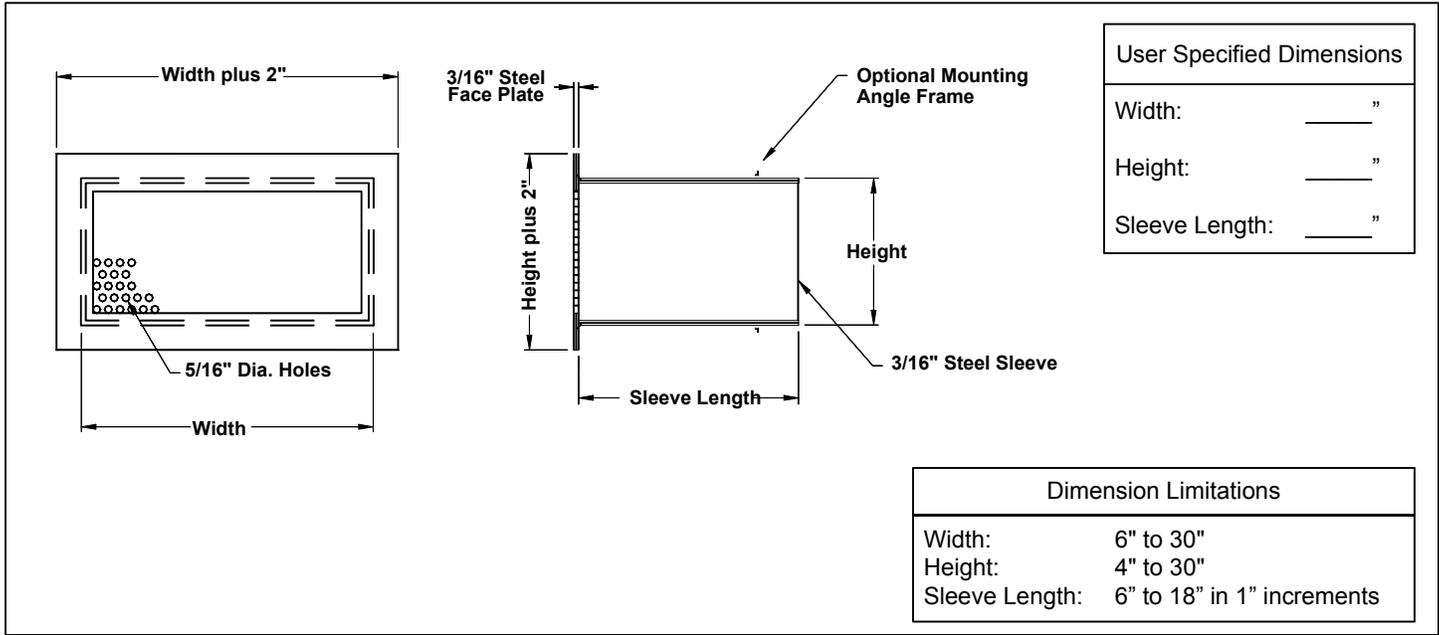


SG-PR
Maximum Security Grilles and Registers

Steel • Round Perforated


Accessories (Optional) Check if provided.

- | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/> Angle Frame Shipped Loose for Field Welding
1 1/2" x 1 1/2" x 3/16" steel angle iron welded together for field installation. Frame is mill finish. | <input type="checkbox"/> Rear Operated Damper
AG-15 steel opposed blade damper. Slot operated from rear of the grille. |
| <input type="checkbox"/> Anchor Bars
3/4" diameter steel bars, 3" in height. Positioned three inches from back of face plate on top and bottom of sleeve. | <input type="checkbox"/> Sleeve Barrier Grille
Constructed of 3/4" diameter steel bars with maximum 6" opening. |
| <input type="checkbox"/> Face Operated Damper
AG-15 steel opposed blade damper. Slot operated from face of the grille. | <input type="checkbox"/> #04 Mill Finish |

Standard Finish: #26 White
General Description

- The TITUS model SG-PR is a maximum security grille. The design of the grille allows a greater effective free area and air flow without compromising security and safety.
- Face Plate is 3/16" steel with 5/16" diameter holes on 7/16" staggered centers and 1" border.
- Sleeve is 3/16" steel.
- All welded construction.