


Minimum Security Grilles and Registers Aluminum • Fixed Bars

Model: SG-1500FL • 0° Deflection • Long Blade Orientation • 1/2" Spacing

General Construction

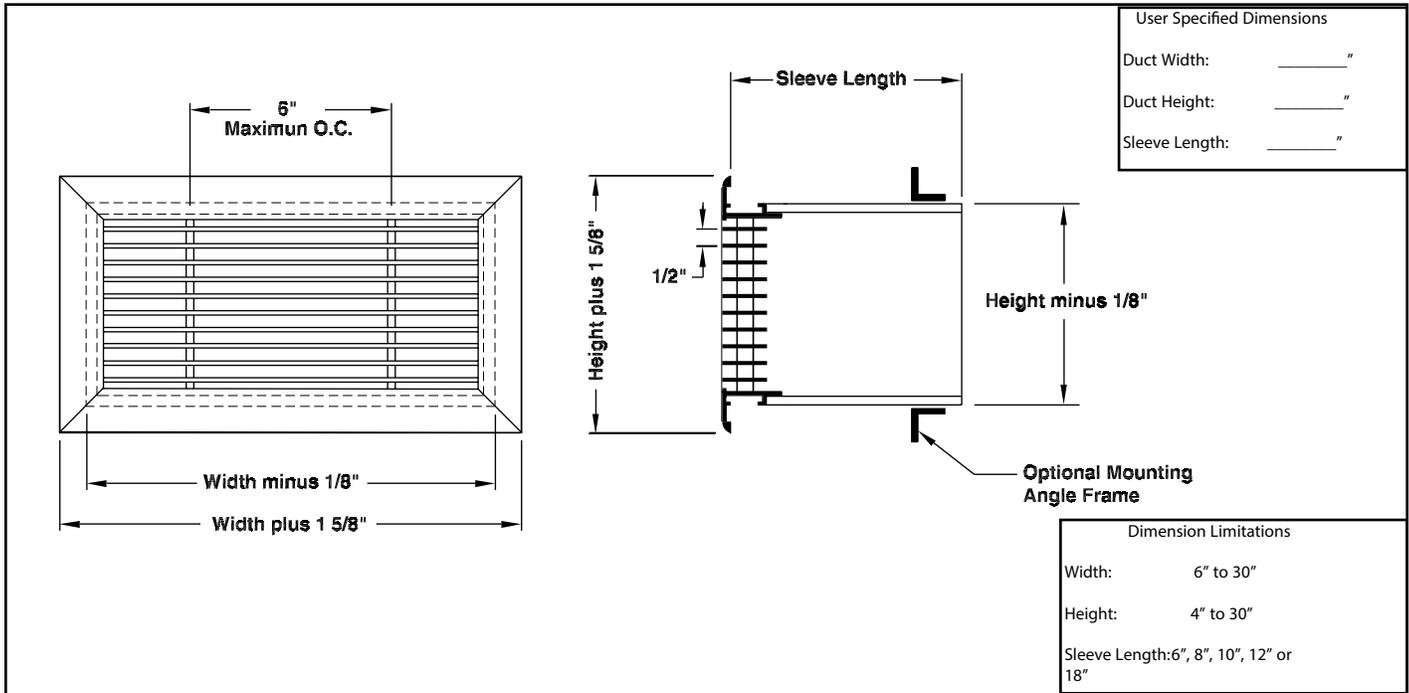

Options and Accessories

- Angle Frame Shipped Loose for Field Welding
1 1/2" x 1 1/2" x 1/8" aluminum angle iron welded together for field installation. Frame is mill finish.
- Anchor Bars
1/2" diameter aluminum bars, 3" in height. Positioned three inches from back of face plate on top and bottom of sleeve.
- Face Operated Damper
AG-15-AA aluminum opposed blade damper. Slot operated from face of the grille.
- Rear Operated Damper
AG-15-AA aluminum opposed blade damper. Slot operated from rear of the grille.
- Sleeve Barrier Grille
Constructed of 1/2" diameter aluminum bars with maximum 6" opening.
- #04 Mill Finish

General Description

The TITUS model SG-1500 is a minimum security grille ideal for shower areas. The rust proof construction makes the SG-1500 an excellent choice for exposure to constant humidity or frequent hosing down.

Standard Construction Details

- Louvers
3/16" x 3/4" welded aluminum bars with zero degree deflection.
- Sleeve
.09" aluminum.
- Finish
#26 White.
- All Welded Construction.