


PESM

Single Duct Terminal Unit
Air Balancing Station

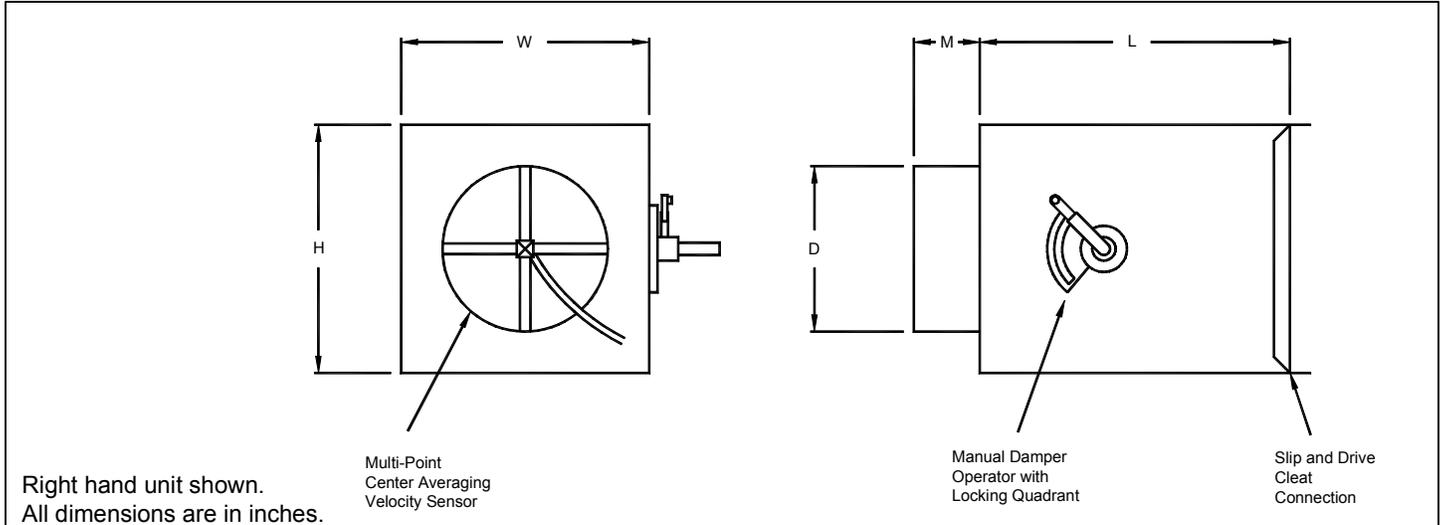

Inlet Size	CFM Range	D	F	H	L	M	W
4	0-225	3 ⁷ / ₈	2 ¹ / ₈	8	15 ¹ / ₂	5 ³ / ₈	12
5	0-350	4 ⁷ / ₈	2 ¹ / ₈	8	15 ¹ / ₂	5 ³ / ₈	12
6	0-500	5 ⁷ / ₈	2 ¹ / ₈	8	15 ¹ / ₂	3 ³ / ₈	12
7	0-650	6 ⁷ / ₈	1 ¹ / ₈	10	15 ¹ / ₂	3 ³ / ₈	12
8	0-900	7 ⁷ / ₈	1 ¹ / ₈	10	15 ¹ / ₂	3 ³ / ₈	12
9	0-1050	8 ⁷ / ₈	-	12 ¹ / ₂	15 ¹ / ₂	3 ³ / ₈	14
10	0-1400	9 ⁷ / ₈	-	12 ¹ / ₂	15 ¹ / ₂	3 ³ / ₈	14
12	0-2000	11 ⁷ / ₈	-	15	15 ¹ / ₂	3 ³ / ₈	16
14	0-3000	13 ⁷ / ₈	-	17 ¹ / ₂	15 ¹ / ₂	3 ³ / ₈	20
16	0-4000	15 ⁷ / ₈	-	18	15 ¹ / ₂	3 ³ / ₈	24
24 x 16	0-8000	23 ⁷ / ₈ x 15 ⁷ / ₈	1 ¹ / ₈	18	15	3 ³ / ₈	38

Accessories (Optional)

Check if provided.

- | | |
|---|--|
| <input type="checkbox"/> SteriLoc Liner | <input type="checkbox"/> Hanger Brackets |
| <input type="checkbox"/> 1" Liner | <input type="checkbox"/> _____ |
| <input type="checkbox"/> Fibre Free Liner | |

General Description

- Heavy gauge steel housing. Mechanically sealed and gasketed, leak resistant construction. Less than 2% of nominal cfm at 1.5" sp wg.
- Dual density internal insulation, treated to resist air erosion. Meets requirements of NFPA 90A and UL 181.
- Rectangular discharge opening is designed for slip and drive cleat duct connection.
- Multipoint center averaging inlet velocity sensor.
- Gauge tees for cfm measurement.
- Choice of right hand or left hand damper operator location.