


## ATFS with TITAN™ Programmed ECM Motor

Fan Powered Terminal, Series Flow  
Analog Control, Pressure Independent

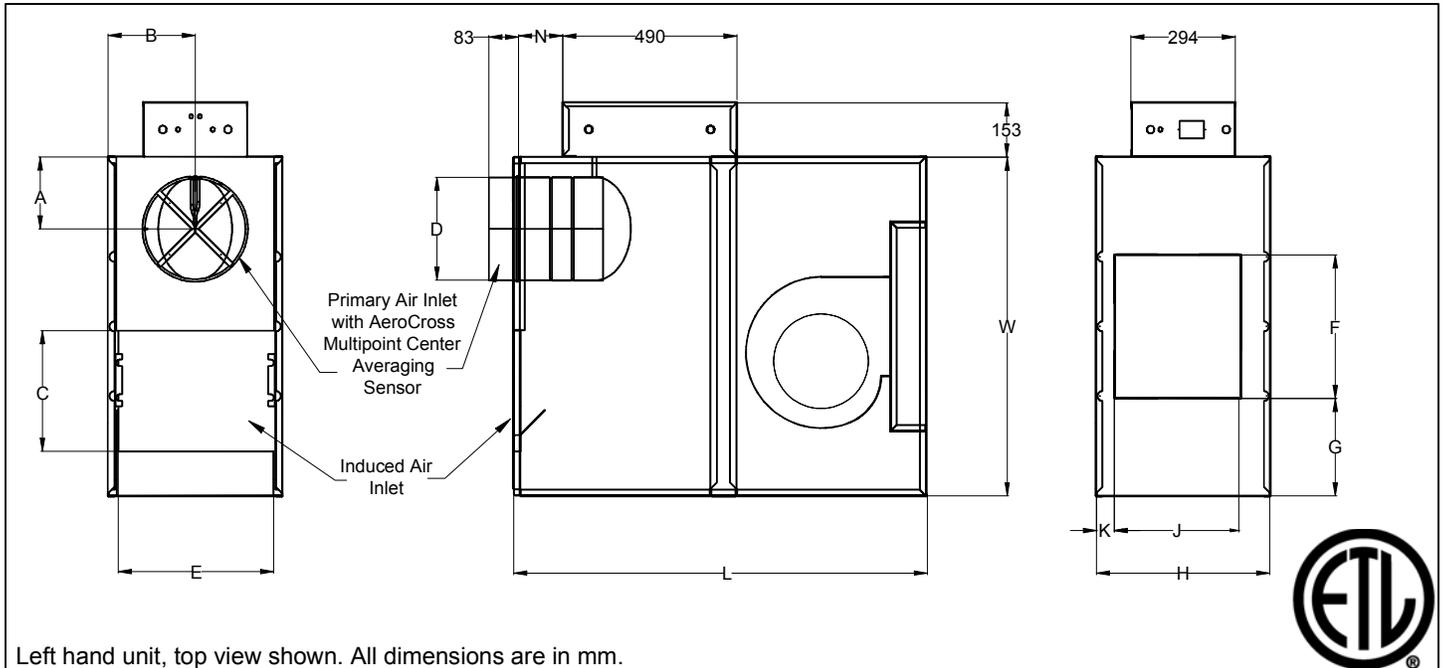

Left hand unit, top view shown. All dimensions are in mm.

Unit Size	Inlet Size	A	B	C	D	E	F	G	H	J	K	L	N	W	Filter Size
B	6	147	196	318	144	362	346	282	392	273	55	1092	70	907	392 x 343
	8	147			193								70		
	10	172			242								119		
	12	196			294								119		
C	6	147	196	318	144	362	346	282	392	273	55	1092	70	907	392 x 343
	8	147			193								70		
	10	172			242								119		
	12	196			294								119		
D	10	172	254	305	242	464	404	286	490	358	49	1207	119	956	343 x 441
	12	196			291								119		
	14	245			340								168		
	16	270			389								168		
E	12	196	254	305	291	464	404	286	490	358	49	1207	119	956	343 x 441
	14	245			340								168		
	16	270			389								168		

### Motor Amperage Ratings

Unit Size	Motor hp	120/1/60 FLA	277/1/60 FLA
B	1/3	3.0	1.6
C	1/3	4.6	2.1
D	1/2	5.6	2.8
E	3/4	9.7	4.9

FLA = Full Load Amperage, as tested in accordance with UL 1995

All fan motors are single phase, same voltage as electric coil (when supplied), with exception that 277V motors are used with 480V, 3 phase coils (4 wire wye).

### Accessories (Optional)

Check  if provided.

- Induced Air Filter, 25mm thick, disposable construction type.
- Fan disconnect switch (not available on units with optional electric coils.)
- Fibre Free Liner
- SteriLoc Liner
- Fan unit fusing
- Cam Latch for Access Door
- UltraLoc Liner
- 25mm Fiberglass Liner
- Hanger Brackets


## Accessories (Optional)

Hot Water Coil Section

- 13mm copper tubes
- Aluminum ripple fins, 10 per inch
- Connections: Male solder, 13mm for both 1-row and 2-row. Left hand or right hand connections.
- Galvanized steel casing
- Flanged duct connection.
- Coil is installed on discharge of unit.

1 Row

2 Row

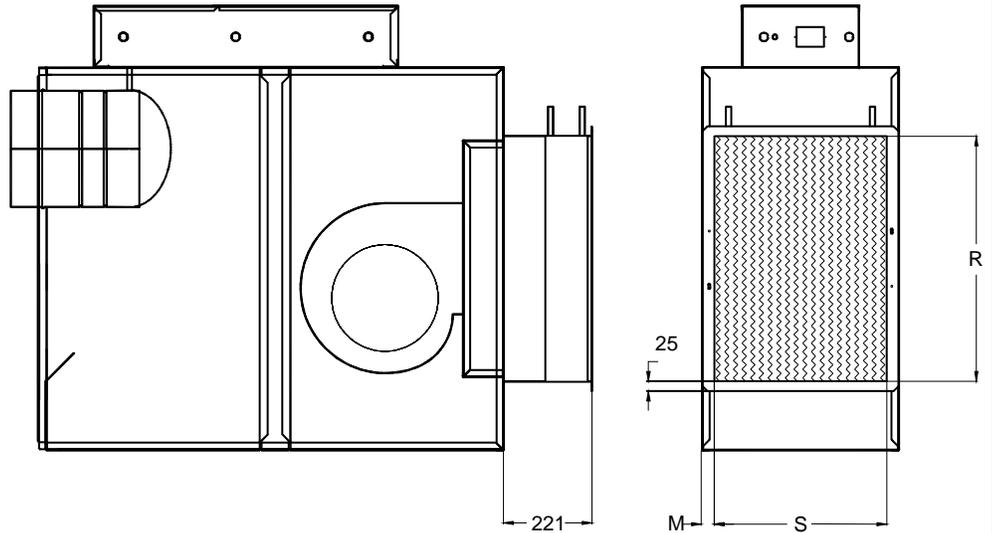

Unit Size	M (1 row)	M (2 row)	R	S
B,C	25	25	502	306
D,E	25	31	613	429

R and S are inside dimensions.

Electric Coil Section

**Standard Features**


- Single side access to low voltage, high voltage, and electric heater controls.
- Automatic reset thermal cutouts, one per element
- Single point electrical connection for entire unit
- Positive pressure flow switch
- Flanged duct connection
- Coil is installed at discharge of unit.
- Transformer

**Options**

- Fuse Block
- Disconnect switch, door interlock type
- Manual reset cutout
- Dust tight construction
- Mercury contactors

**Supply Voltage**

- 208V, 1 ph, 60Hz
- 240V, 1 ph, 60Hz
- 277V, 1 ph, 60Hz
- 208V, 3 ph, 60Hz
- 480V, 3 ph, 60Hz (4 wire wye only)

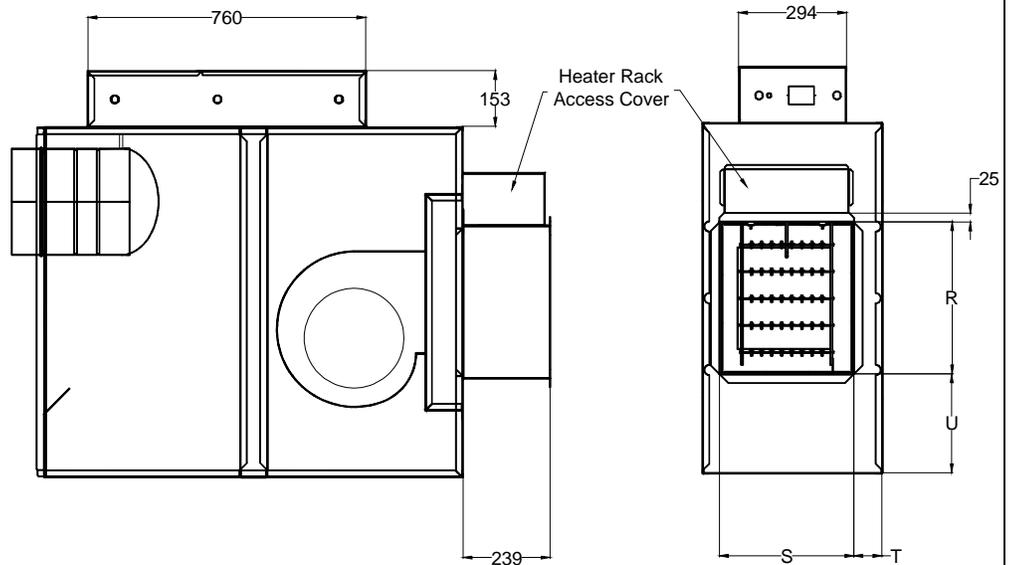


Unit Size	U	R	S	T
B,C	279	355	282	53
D,E	270	417	368	77

R and S are inside dimensions.

## Accessories (Optional)

### Hanger Bracket Location

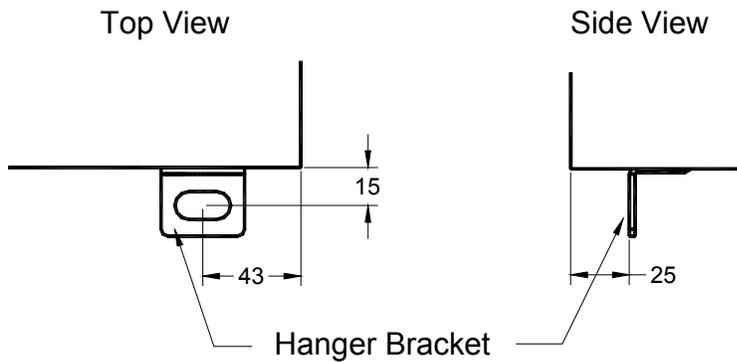

## General Description

- Heavy steel casing, with leak resistant construction.
- Dual density insulation, coated to prevent air erosion, meet requirements of NFPA 90A and UL 181.
- Ultra high efficiency, brushless DC ECM motor with a unique microprocessor based motor controller.
- Manual PWM controller allows simple screwdriver adjustment of fan speed.
- Optional remote PWM controller allows for a 0-10 V signal from the DDC controller to adjust the fan speed.
- Efficiencies of up to 70% across the entire operating range.
- Provides a large turndown ratio
- Constant volume regardless of changes in downstream static pressure allows for factory setting of cfm.
- Top and bottom access panels can be removed for service.
- Multipoint, center averaging velocity sensor.
- Primary air flow balancing connections.
- Pressure independent primary flow control.
- Single point electrical connections.
- Rectangular discharge opening is designed for flanged duct connections.
- Electronic proportional room thermostat with adjustable setpoints for temperature and airflow is included with unit.
- Minimum and maximum airflow adjustments are made at the thermostat, using a digital voltmeter.

This submittal is meant to demonstrate general dimensions of this product. The drawings are not meant to detail every aspect of the product. Drawings are not to scale. Titus



605 Shiloh Road • Plano, Texas 75074 • 972-212-4800

reserves the right to make changes without written notice.