



Submittal


CT-TAF-L


Access Floor Diffuser Series
Perimeter Linear Bar Diffuser • Aluminum • Fixed Bars • Pencil Proof

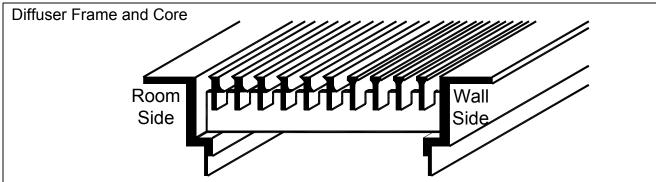

CT-TAF-L is only available with Type 5 Heavy Duty CT Floor Frame. Diffuser core is a combination of CT-PP-0, CT-481, and CT-PP-3 Core (0°, 15°, and 30° Deflection).

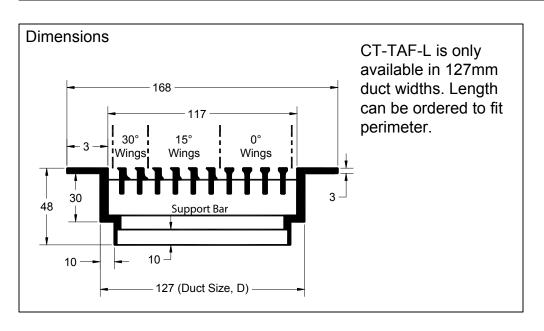

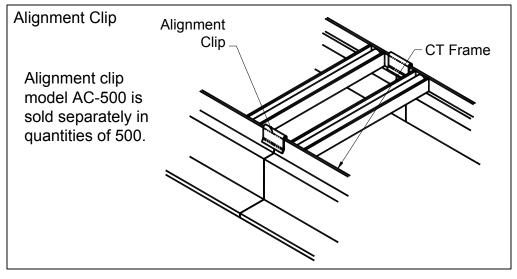

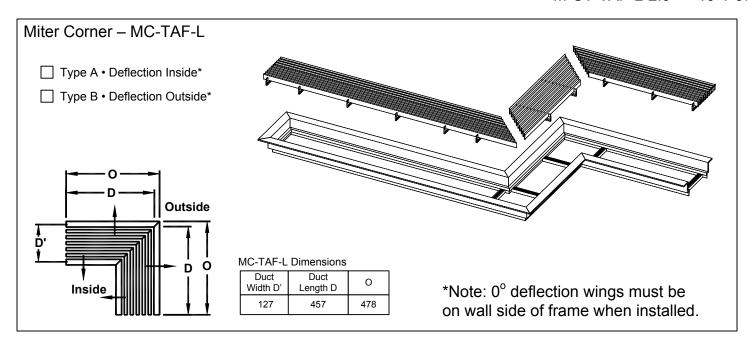

General Description

- Titus CT-TAF-L is a fixed linear bar diffuser for underfloor perimeter return applications.
- The CT-TAF-L is designed to be integrated with the TAF-L-F, TAF-L-H, and TAF-L-R plenums (see TAF-L-F, TAF-L-H, and TAF-L-R submittals for more information).
- CT frame drops into perimeter slot and sits on top of carpeting.
- CT-TAF-L Core drops into frame.

- Installs into the TAF-L plenums from the top surface. Removal of the flooring is not required.
- 13mm maybe cut from the end of the frame and core
- NEVER cut off the last core support or frame support
- 0 deg deflection wings of core must be on wall side of frame when installed.
- Sections can be joined end-toend for continuous appearance, using alignment clips.

- Standard lengths are 1, 2, 3, 4, 5 and 6 feet, furnished as complete, welded assemblies.
- Lengths greater than 6 feet are furnished in multiple sections, the number and size determined by the factory.
- All deflection bars are fixed and are parallel to the long dimension.
- Fixed Bars are extruded aluminum.
- Standard finish is #26 white.