


OPTIONS


underfloor air distribution

ACTUATED FLOW REGULATOR

- 24VAC electric flow regulator actuator is integral part of the assembly
- RJ12 cable connections for easy plug and play installation between units
- UL Rated
- 24VAC actuator is direct drive 0-10 VDC control signal
- Room sensor equipped with digital display for setpoint adjustment & PC data connection

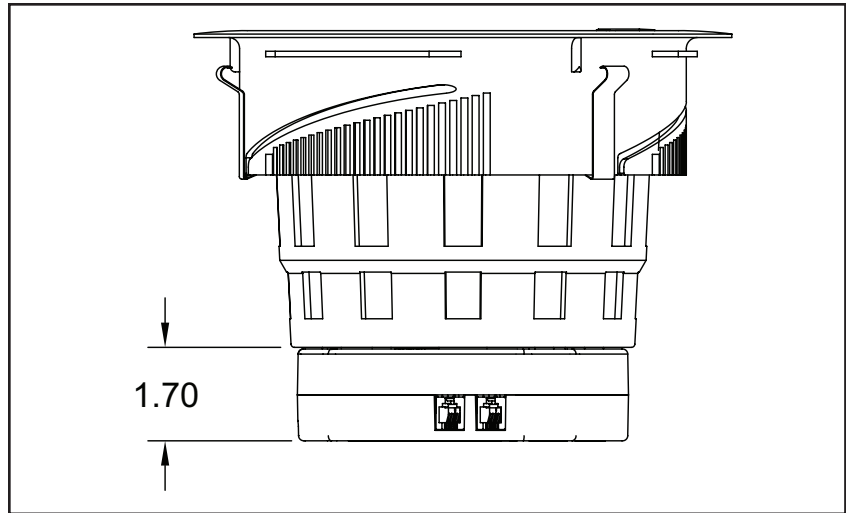

TAF-R ACTUATED DAISY CHAIN

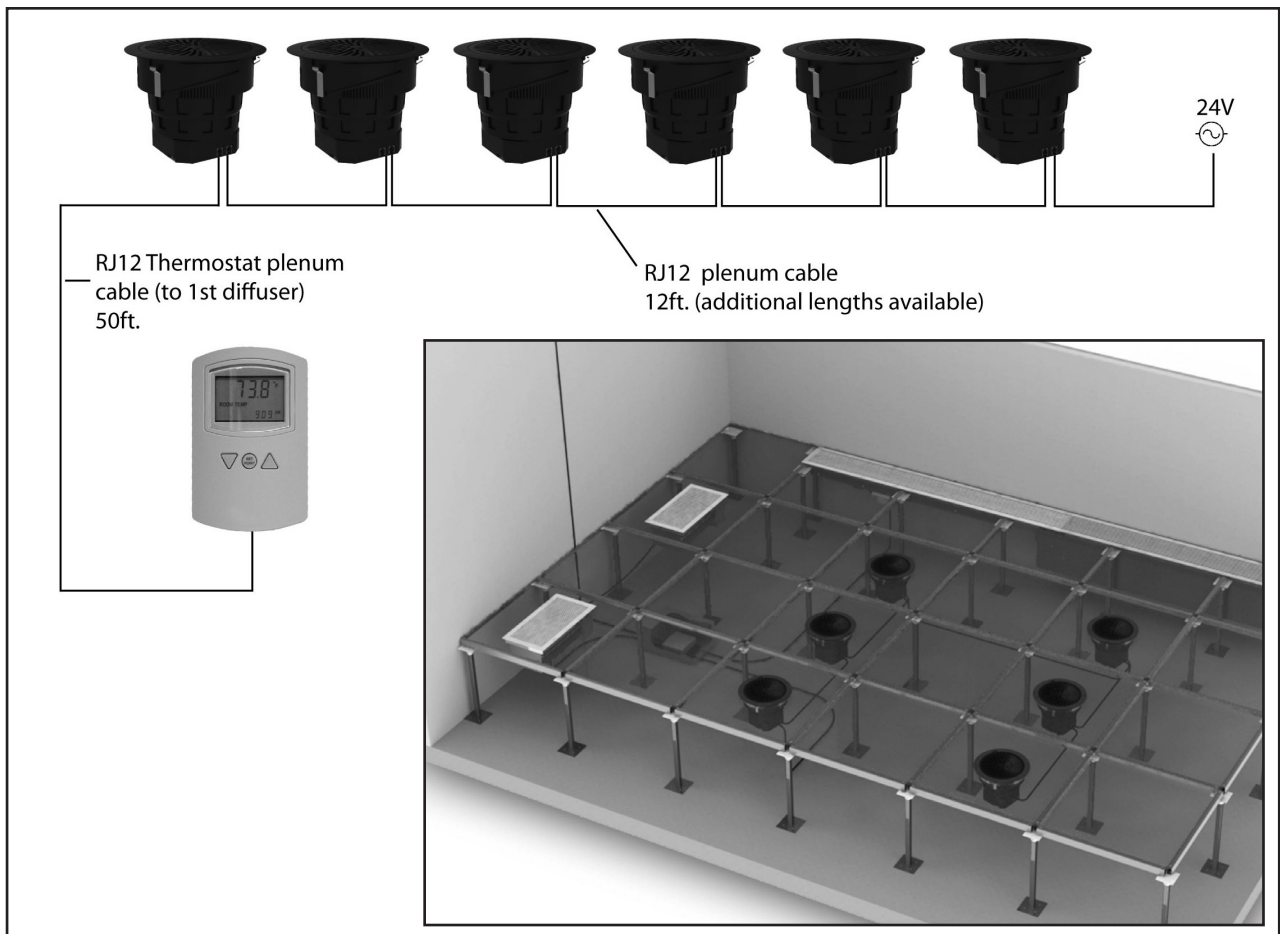

System Overview:

The actuated TAF-R & TAF-R-FR can have a maximum of six units daisy chained to each other utilizing the standard 12 ft. plenum cable. This allows for a maximum of 12 units per power supply with six units on each side of the power supply.