


### SG-1500FL

- Louvers:  $\frac{3}{16}$ " x  $\frac{3}{4}$ " welded aluminum bars with zero degree deflection
- Sleeve: 0.09" aluminum sleeve is welded to the frame
- All welded construction
- Ideal for showers and other humid areas



SG-1500FL

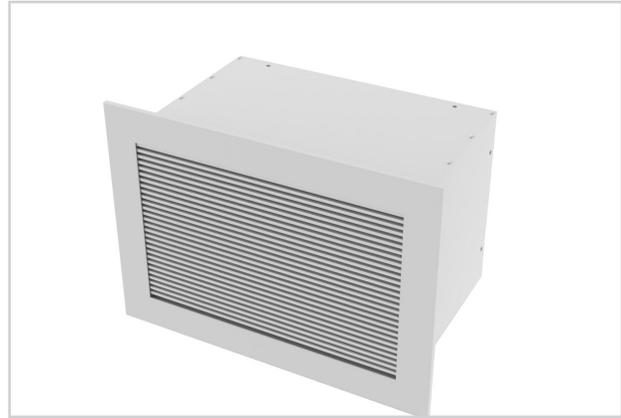

metric sizes

humid areas

monitoring areas

minimum security



See website for Specifications

#### MODEL:

SG-1500FL / 0° Deflection /  $\frac{1}{2}$ " Blade Spacing

#### FINISHES:

Standard Finish - #26 White

Optional Finish - #04 Mill

#### OVERVIEW

##### Aluminum Fixed Bars

Titus minimum security grilles are designed where additional security is still necessary and maximum performance is required. The SG-1500FL is an all aluminum security grille ideal for shower areas. The rust proof construction makes this grille an excellent choice for areas exposed to constant humidity.

#### OPTIONS

- Angle Frame -  $1\frac{1}{2}$ " x  $1\frac{1}{2}$ " x  $\frac{1}{8}$ " aluminum angle iron shipped loose for field welding. Frame is mill finish.
- Anchor Bars -  $\frac{1}{2}$ " diameter aluminum bars, 3" in height. Positioned 3 inches from back of face plate on top and bottom of sleeve.
- Face Operated Damper - AG-15-AA steel opposed blade damper. Slot operated from face of the grille.
- Rear Operated Damper - AG-15-AA steel opposed blade damper. Slot operated from rear of the grille.
- Sleeve Barrier Grille - constructed of  $\frac{1}{2}$ " diameter steel bars with maximum 6" opening