
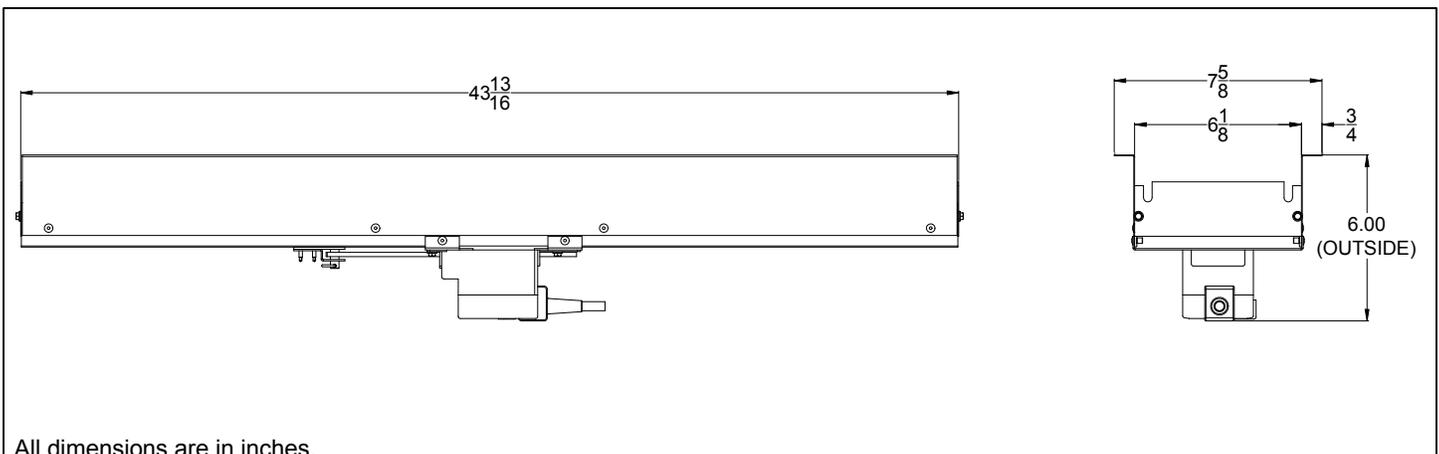




TAF-L-V

Access Floor Diffuser Series

Linear Diffuser Plenum with Variable Aperture Plate

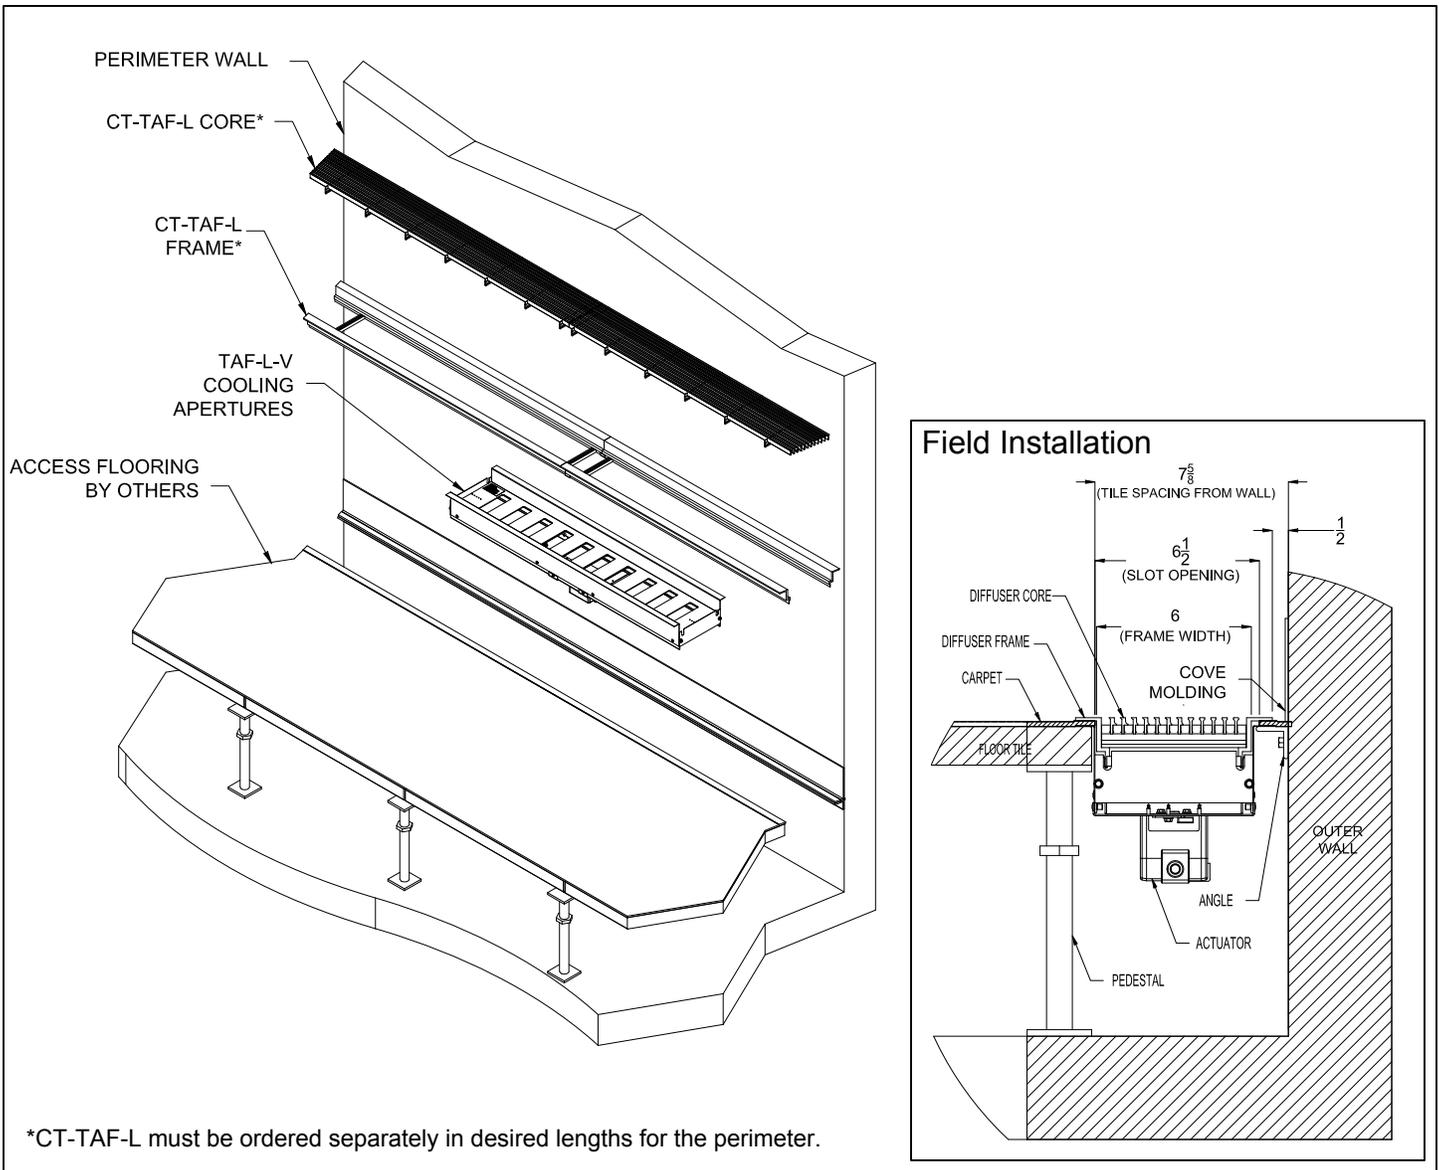

Aperture Plate

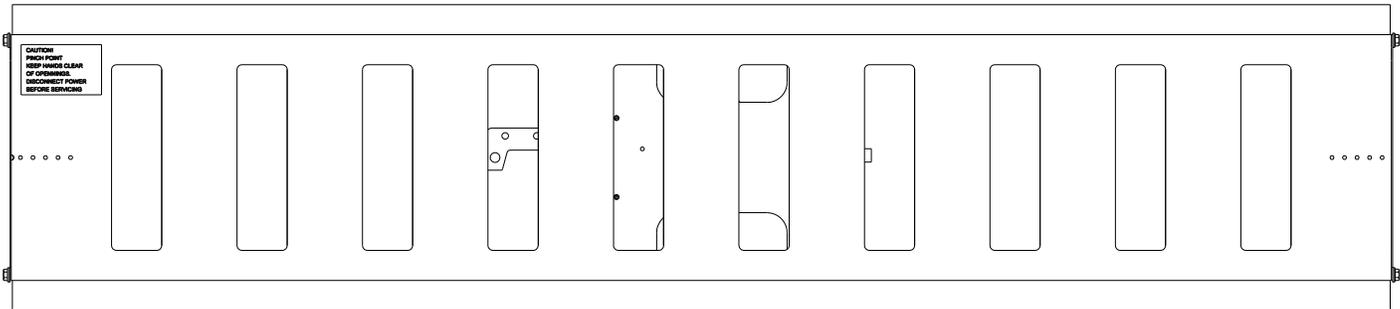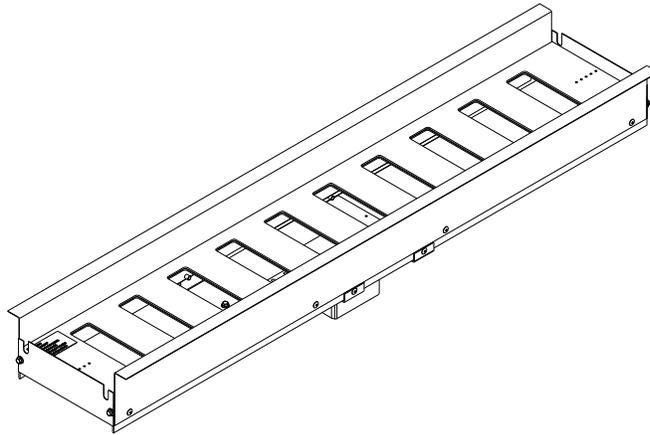

Accessories (Optional)

Check if provided.

24V Actuator (Proportioning)

24V Actuator (Floating)

Thermostat (Proportioning)

Thermostat (Floating)

General Description

- Titus TAF-L-V is a variable linear bar diffuser plenum for underfloor perimeter supply applications.
- The TAF-L-V is designed to be integrated with the CT-TAF-L linear bar grille (see CT-TAF-L submittal for more information).
- The TAF-L-V, when used with the CT-TAF-L is designed to provide a uniform throw pattern throughout its operating range, regardless of damper position.
- Active four (4) foot sections of TAF-L-V plenum can be placed anywhere within the continuous CT-TAF-L linear bar grille.
- The TAF-L-V plenum is constructed of galvanized steel.
- Damper design provides consistent air distribution across the full length of the TAF-L-F.
- 24 Volt electric damper actuator is supplied with the assembly.
- Installs into the CT-TAF-L from the top surface. Removal of the flooring is not required.

This submittal is meant to demonstrate general dimensions of this product. The drawings are not meant to detail every aspect of the product. Drawings are not to scale. Titus reserves the right to make changes without written notice.



605 Shiloh Road • Plano, Texas 75074 • 972-212-4800

All rights reserved. No part of this work may be reproduced or transmitted in any form or by any means, electronic or mechanical including photocopying and recording, or by any information storage retrieval system without permission in writing from Air Distribution Technologies