

T₃ Series VAV Diffusers


Digital Diffuser • Steel • Square Panel • Horizontal Pattern
Model: T₃SQ



Model Configuration

- ☐ T₃SQ-M – Heating / Cooling Primary Unit
☐ T₃SQ-D – Heating / Cooling Secondary Unit

☐ Border Type 3 (Lay-In) Full Face

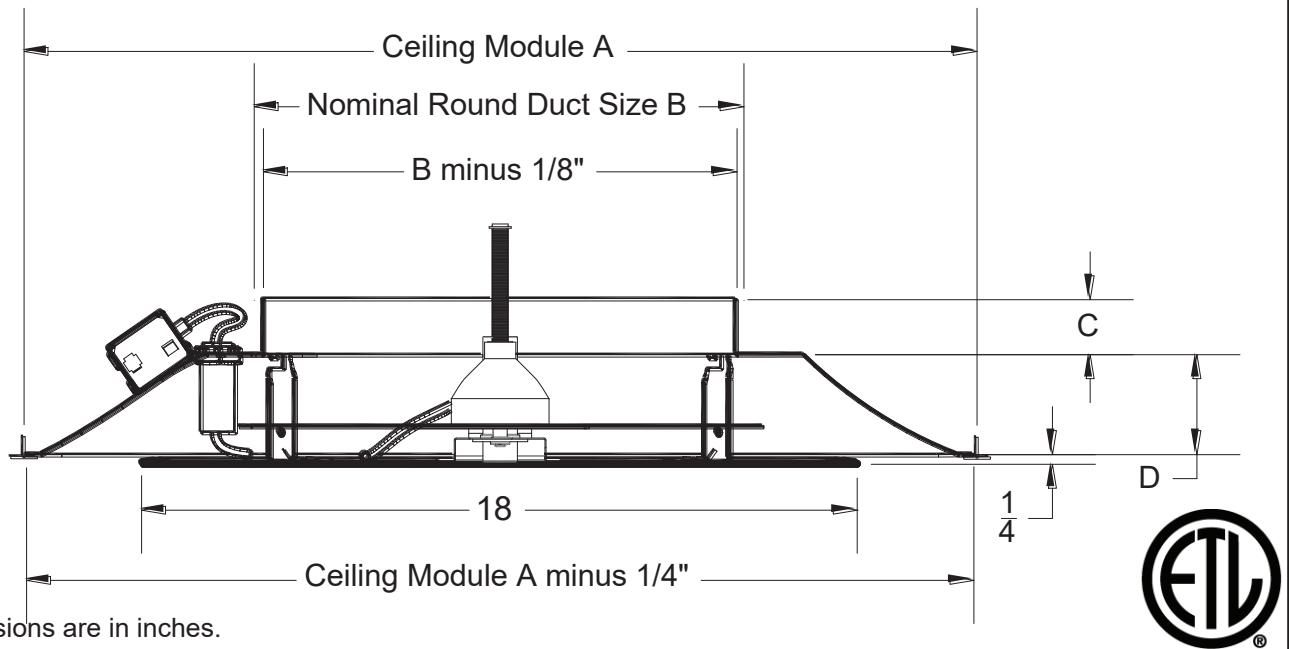


Ceiling Module A	Nominal Round Duct Sizes B	C	D
24	6	1 ¹ / ₈	3 ⁵ / ₈
	8	1 ¹ / ₄	3 ³ / ₄
	10, 12	1 ³ / ₈	3 ⁷ / ₈

Ceiling Module	Face Size	Nominal Round Duct Size	Border Type
24 x 24	24 x 24	6, 8, 10, 12	2, 3, 4, 5, NT


Other Available Border Types ☒ if provided.

☐ Border Type 1 Rapid Mount Frame for Surface Mounting Applications.

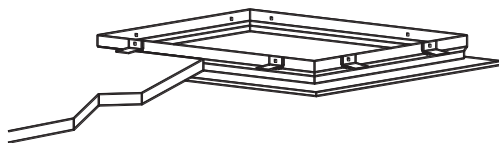

The T₃SQ series of diffusers are not available with standard border type 1. For surface mounting applications, the TRM optional Rapid Mount frame can be used. Using border option TRM, the T₃SQ series diffusers are shipped with border type 3 (lay-in). The TRM frame is shipped separate for field installation. Once the TRM is installed, the T₃SQ diffuser simply lays into the frame. This option allows access into the ceiling after installation.



☐ Border Type NT (Narrow Tee)

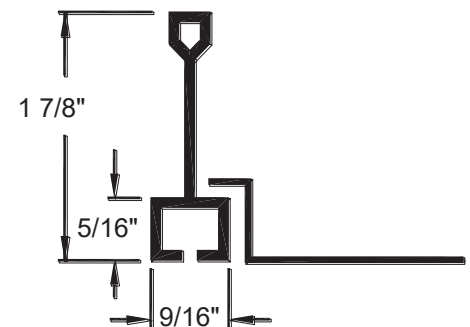

This submittal is meant to demonstrate general dimensions of this product. The drawings are not meant to detail every aspect of the product. Drawings are not to scale. Titus reserves the right to make changes without written notice.

All rights reserved. No part of this work may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or by any information storage retrieval system without permission in writing from Titus..

Other Available Border Types – cont.

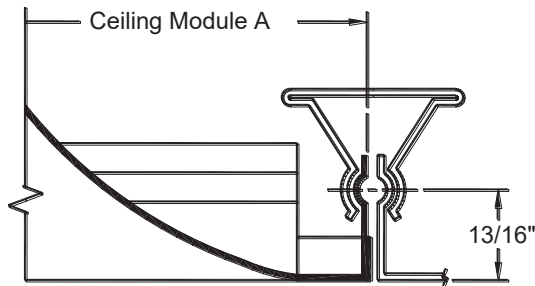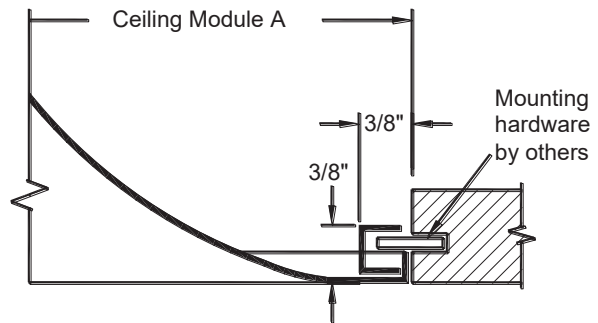Check ☒ if provided.☐ Border Type 2 (Snap-In) Full Face or Panel Mounted☐ Border Type 4 (Spline) Full Face or Panel Mounted


Standard Finish: #26 White

Optional Accessories

Check ☒ if provided.☐ Power Module




- ☐ 277/24VAC transformer (T3PM277)
- ☐ 120/24VAC or 208/24VAC transformer (T3PM)

- Power conditioner
- One power module is required for every fifteen (15) primary or secondary diffusers without electric reheat or fourteen (14) primary or secondary diffusers with electric reheat.
- 24VAC output to T₃SQ-M / T₃SQ-D diffusers.
- Integral circuit protection protects the power module from shorts in the RJ-9 and mini-fit daisy chain cabling.



RJ9 connector
Mini-fit Connector
2 PLCS

Ø.188
4 PLCS

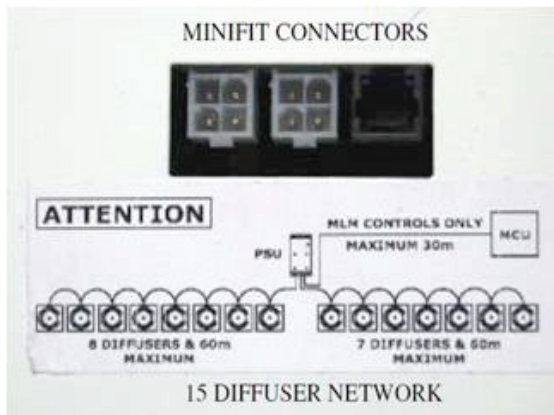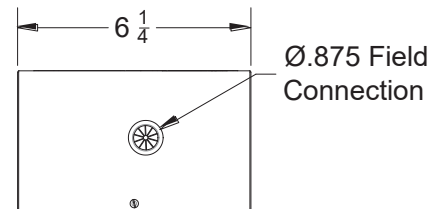

Power Module Wiring

- A total of 8 diffusers can be daisy chained off one connector and another 7 diffusers can be daisy chained from the other connector for a total of 15 diffusers.
- An RJ9 female connector is also provided on the power module. This connector allows the communication cable to link the maximum 15 diffuser network to the master communications module (MCM).

This submittal is meant to demonstrate general dimensions of this product. The drawings are not meant to detail every aspect of the product. Drawings are not to scale. Titus reserves the right to make changes without written notice.

All rights reserved. No part of this work may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or by any information storage retrieval system without permission in writing from Titus..

☐ Master Communication Module

-

All rights reserved. No part of this work may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or by any information storage retrieval system without permission in writing from Titus..


Optional Accessories

Check ☒ if provided.

Check ☒ if provided.

☐ Pressure Relief Ring

- Relieves pressure by bypassing excess supply air to the ceiling plenum as the control disc closes.
- Attaches to diffuser inlet.
- Duct size is 2" smaller than diffuser inlet size (B-1). Relief ring inlet matches duct size (B-2).
- Performance will be based on the relief ring size.
- Relief rings cannot be used with neck heaters.

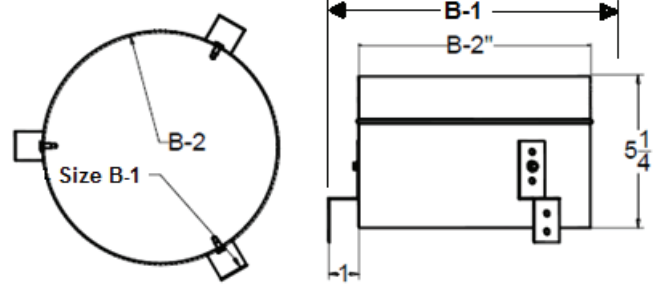

General Description

The T₃SQ-M (Primary unit) and T₃SQ-D (secondary unit) are electronically controlled through a 12V DC actuator capable of varying the supply of cold and warm air into the space by means of regulating a variable aperture damper, known as a control disc, vertically in the diffuser.

Supply air from the variable geometry diffuser shall discharge horizontally in a 360° pattern and shall maintain air movement in the space throughout the range of volume variation from 100% to 25%.

As the volume of air is decreased by the control disc, the velocity of air is increased, thereby maintaining the longest throw and best entrainment. This ensures superior air distribution at all damper positions.

- The curvature of the backpan works with the formed edges of the face panel to deliver a tight horizontal air pattern, without excessive noise or pressure drop over the full range of operation.
- The position of the control disc is varied by linear drive actuator mounted on the control disc.
- When the zone temperature is 1°F above setpoint, the diffuser is in cooling mode. When the zone temperature is 1°F below setpoint, the diffuser is in heating mode.
- A built-in auto-calibration feature ensures that the volume control damper position is always correct.
- Optional SCR modulating control inlet electric heater, available up to 2 kW depending on inlet size and voltage, is mounted in the neck of the T₃SQ-M or T₃SQ-D diffuser. (Line voltage must be supplied to the electric heaters.)
- The T₃SQ diffuser is designed to satisfy architectural, as well as, engineering criteria. The strong, clean, unobtrusive lines harmonize with the ceiling, without sacrificing performance. The standard finish is #26 White.
- The face panel and backpan are constructed from 18 gauge steel. The formed outer edge also assures a straight and level surface.

This submittal is meant to demonstrate general dimensions of this product. The drawings are not meant to detail every aspect of the product. Drawings are not to scale. Titus reserves the right to make changes without written notice.

All rights reserved. No part of this work may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or by any information storage retrieval system without permission in writing from Titus..