


## TFS-G

- Two casings for easy design layout
- Pressure independent primary airflow control
- AeroCross™ multi-point inlet velocity sensor with center averaging
- Energy-efficient fan motor, permanent split capacitor type, mounted with vibration isolators
- Optional TITAN™ programmed ECM brushless DC motor provides ultra-high efficiency, pressure independent operation
- Adjustable SCR fan speed control with minimum voltage stop
- Single point electrical, pneumatic main, and thermostat connections
- 20-gauge galvanized steel casing
- Centered, rectangular discharge opening is designed for flanged duct connections
- Bottom access panels can be removed for service

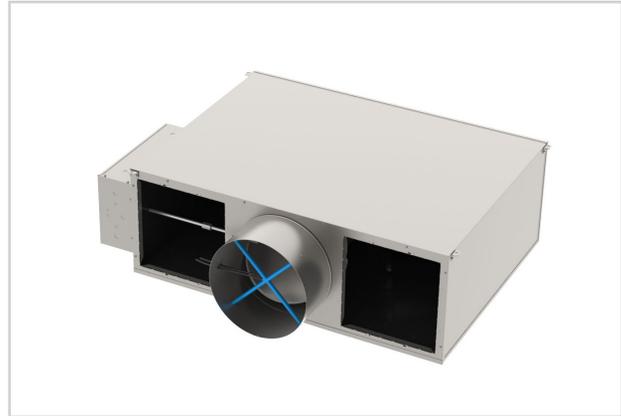

TFS-G

### MODELS:

PTFS-G / Pneumatic Control  
ATFS-G / Analog Control  
DTFS-G / Digital Control

### OVERVIEW

#### Quiet Operation

Designers choose Series flow terminals for their characteristics of constant air delivery and temperature blending. Nevertheless, these terminals maintain the VAV energy savings at the central fan.

### ADDITIONAL FEATURES

- Rectangular discharge opening is designed for flanged duct connections
- Dual density insulation, coated to prevent air erosion, meet requirements of NFPA 90A and UL 181



See website for Specifications