


## TBHD & TBVD Standard Flat Filter Rack

Model TBHD/TBVD Direct Drive Blower Coil Unit Standard Flat Filter Rack

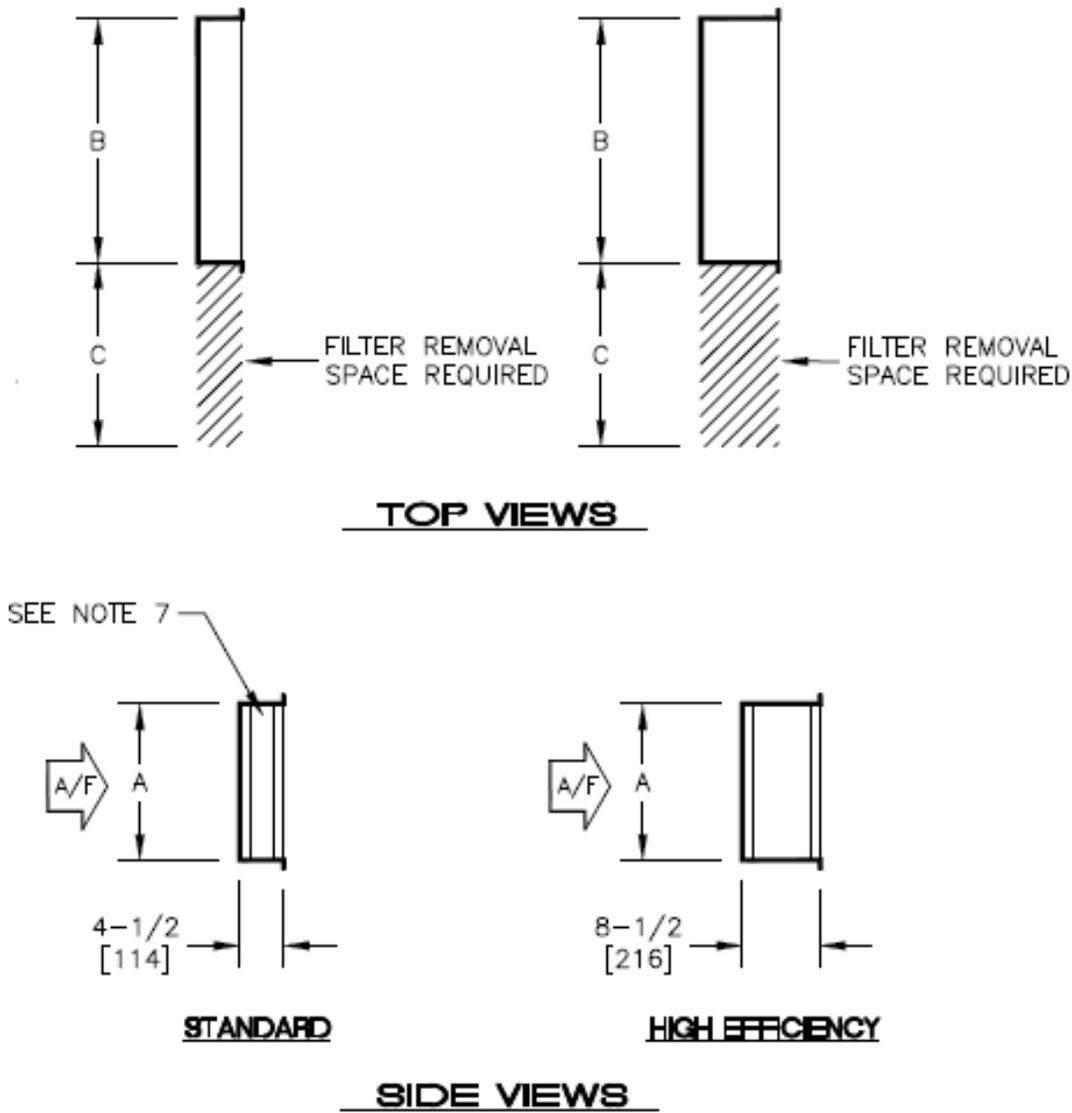

SIZE	A	B	C	QTY & SIZE FILTERS
08	16 [406]	20 [508]	20 [508]	(1) 16 X 20
12	16 [406]	25 [635]	25 [635]	(1) 16 X 25
16	16 [406]	39-1/2 [1003]	20 [508]	(2) 16 X 20
20	16 [406]	44-1/2 [1130]	25 [635]	(1) 16 X 20 (1) 16 X 25
30	25 [635]	51 [1295]	25 [635]	(2) 16 X 20 (1) 16 X 25
40	25 [635]	59 [1499]	25 [635]	(3) 20 X 25

**Notes:**

1. All dimensions are inches [millimeters]. All dimensions are  $\pm 1/4$ " [6mm]. Metric values are soft conversion.
2. Flat filter rack may be located at unit inlet as required.
3. Standard rack will accept nominal 1" or 2" thick filters.
4. High eff. Rack will accept nominal 2" and/or 4" thick filters.
5. High eff. Rack not available "HM" and "VM" units.
6. 1" duct connections space provided on entering side of rack for connection of filed ductwork.
7. Hinged cover provided on both sides of externally mounted filter racks. Internal standard filter racks have pivoting bar type filter retainer.
8. See individual unit submittal drawings for location of filter rack on unit.

New	08/04/22	SP	New Release
Revision Date	Version Date	Initiated By	Description