


Louvered Supply Grilles and Registers • Aero-Blade Series Steel Border • Aluminum Airfoil Blades

- Models: **M271RL** • Single Deflection • Long Blades • 19mm Blade Spacing
 M271RS • Single Deflection • Short Blades • 19mm Blade Spacing

Border Type 1 • Surface Mount

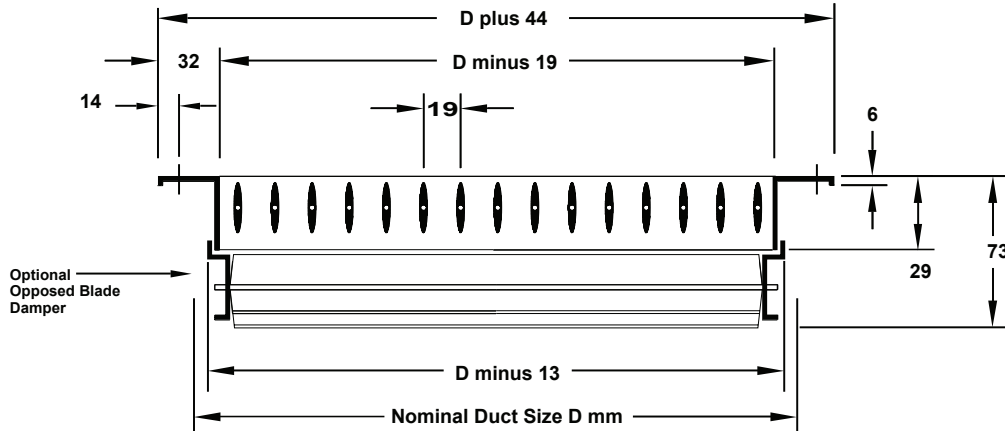

Available Sizes (Dmm x Dmm)


Border Type 1 is available in sizes 152 x 102 through 1219 x 1219 in one piece construction. Sizes larger than 1219 x 1219 are shipped in multiple sections with joining strips for field assembly. Odd and fractional sizes are available at additional cost.

Note: Dimensions are in millimeters. Wall or duct opening should be duct size ± 3 .

Fastenings

Type A • External Screw


Type C • Concealed Screw

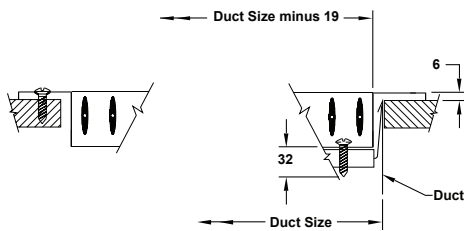

Available with Border Type 1 only.

Mounting Frames

PFAP • Aluminum Plaster Frame



Recessed Mounted Example

Note: Wall opening should be listed duct size + 3 to listed duct size + 6. Model PFAP Plaster Frame can be installed as either surface mount or recessed.

Accessories (Optional) Check if provided

- | | |
|--|--|
| <input type="checkbox"/> Opposed blade damper (galvanized steel) | <input type="checkbox"/> IS • Insect Screen (2mm square mesh – galvanized steel) |
| <input type="checkbox"/> EQT • Earthquake Tabs | <input type="checkbox"/> DS • Debris Screen (6mm square mesh – galvanized steel) |
| <input type="checkbox"/> Other: _____ | <input type="checkbox"/> Other: _____ |

Standard Finish: #26 White

General Description

- Aerodynamically shaped blades are individually adjustable.
- Material is 20 gauge steel for border and heavy extruded aluminum for blades.
- All dimensions are ± 2 mm.
- Optional opposed blade damper has screw-driver adjustment accessible through face of register.
- #8 x 32mm lg. Phillip's flat head sheet metal screws painted white.