


# Air Balancing Devices Volume Extractors • Duct Mounted For Square and Rectangular Necks

Models: **AG-225-S** • Short Blades • 2" Spacing  
**AG-225-L** • Long Blades • 2" Spacing

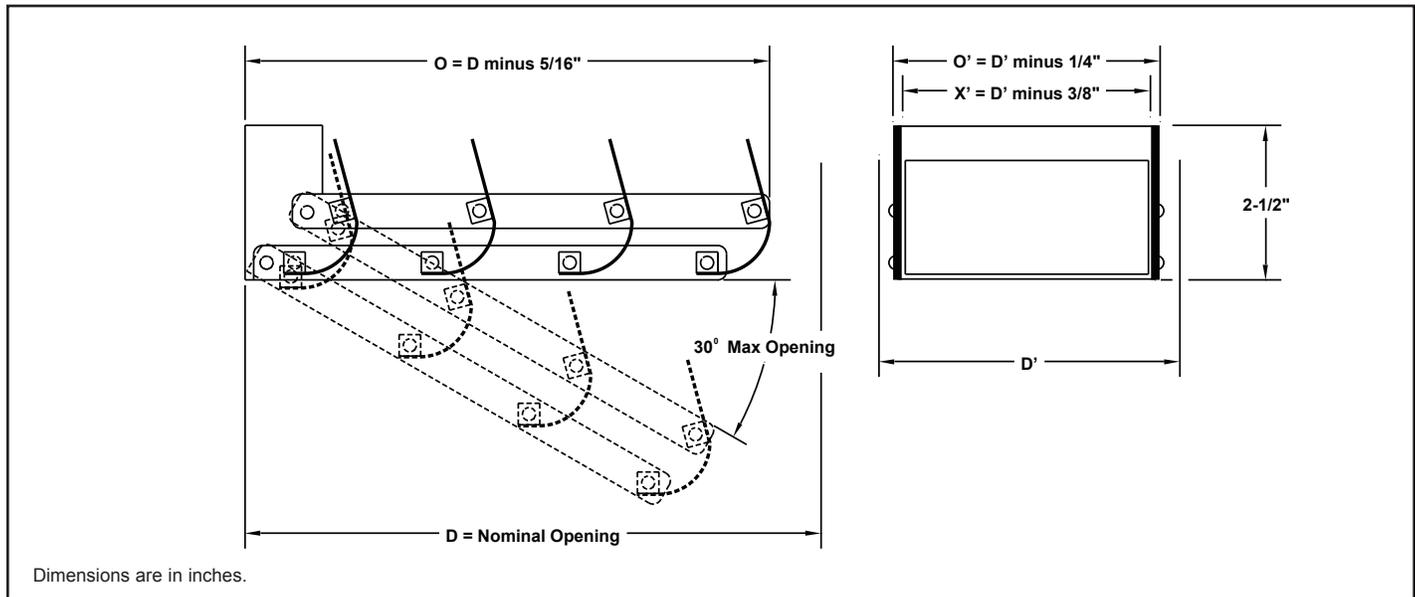

## Operator Types selection

**Type 1 • Push-Pull w/ Locking Screw**

Screw  
Duct by Others

**AG-225-S Available Sizes:** 6" x 4" through 36" x 36".  
**AG-225-L Available Sizes:** 6" x 4" through 36" x 36".

**Type 2 • Square Rotating Shaft**

End Bearing #656-3/8  
Indicator  
Locking Nut  
Adjusting Nut  
3/8" X 3/8" Rod  
All hardware by Others, except Operating Lever  
Duct by Others  
Operating Lever

**AG-225-S Available Sizes:** 6" x 4" through 36" x 12".  
**AG-225-L Available Sizes:** 6" x 4" through 24" x 12".

**Type 3 • Hex Key**

Hex Key (By Others)  
Duct by Others

**AG-45-S Available Sizes:** 6" x 4" through 36" x 16".  
**AG-45-L Available Sizes:** 6" x 4" through 24" x 16".

**Standard Finish:** Mill

## General Description

- The TITUS AG-225-S and AG-225-L are duct mounted volume extractors with 2" blade spacings.
- The AG-225 can adjust both air volume and flow in duct systems around problem areas such as elbows, tees and take offs.
- The AG-225 can adjust the contour of airflow to fill the duct, thus reducing noise and pressure drop.
- Material is galvanized steel.