


Maximum Security Grilles and Registers

Model: SG-PS • Steel • Square Perforated

General Construction

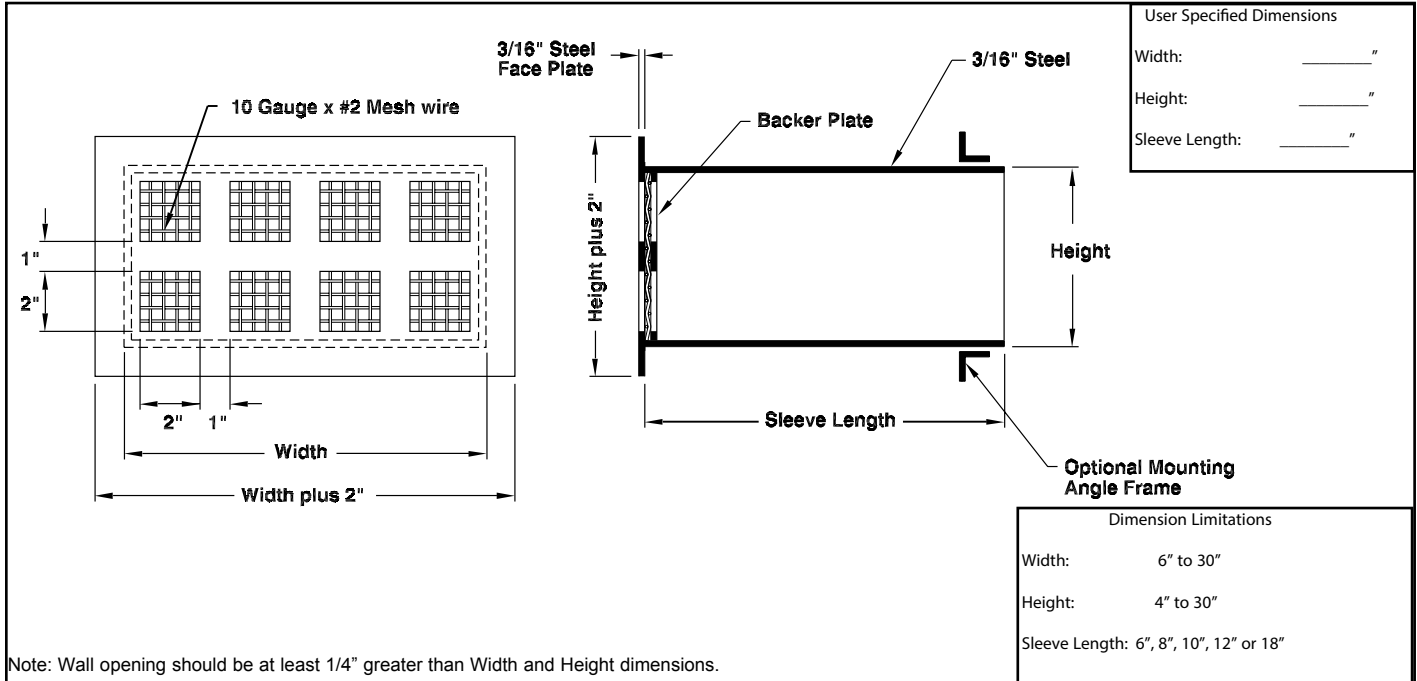

Options and Accessories

- Angle Frame Shipped Loose for Field Welding
1 1/2" x 1 1/2" x 3/16" steel angle iron welded together for field installation. Frame is mill finish.
- Anchor Bars
3/4" diameter steel bars, 3" in height. Positioned three inches from back of face plate on top and bottom of sleeve.
- Face Operated Damper
AG-15 steel opposed blade damper. Slot operated from face of the grille.
- Rear Operated Damper
AG-15 steel opposed blade damper. Slot operated from rear of the grille.
- Sleeve Barrier Grille
Constructed of 3/4" diameter steel bars with maximum 6" opening.
- #04 Mill Finish

General Description

The TITUS model SG-PS is the industry standard used in areas of maximum security and/or minimum supervision where absolute grille integrity must be maintained.

The SG-PS effectively prevents the concealment of dangerous or potentially lethal objects or any other contraband of concern to authorities.

Standard Construction Details

- Face Plate
3/16" steel with 2" square holes, 1" fret bars and 1" border.
- Mesh Screen
10 gauge x #2 mesh wire located between the face plate and back-up plate.
- Backer Plate
3/16" steel.
- Sleeve
3/16" steel.
- Finish
#26 White.
- All Welded Construction.